

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789582

Luminaire Tested: LER6D15D010-EC6DR300215IC9030-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789582
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR300215IC9030-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2123.4 lumens
Efficiency: N/A
Efficacy: 134.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789582

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9030-6LBDP1MW

Luminous Intensity Polar Plot

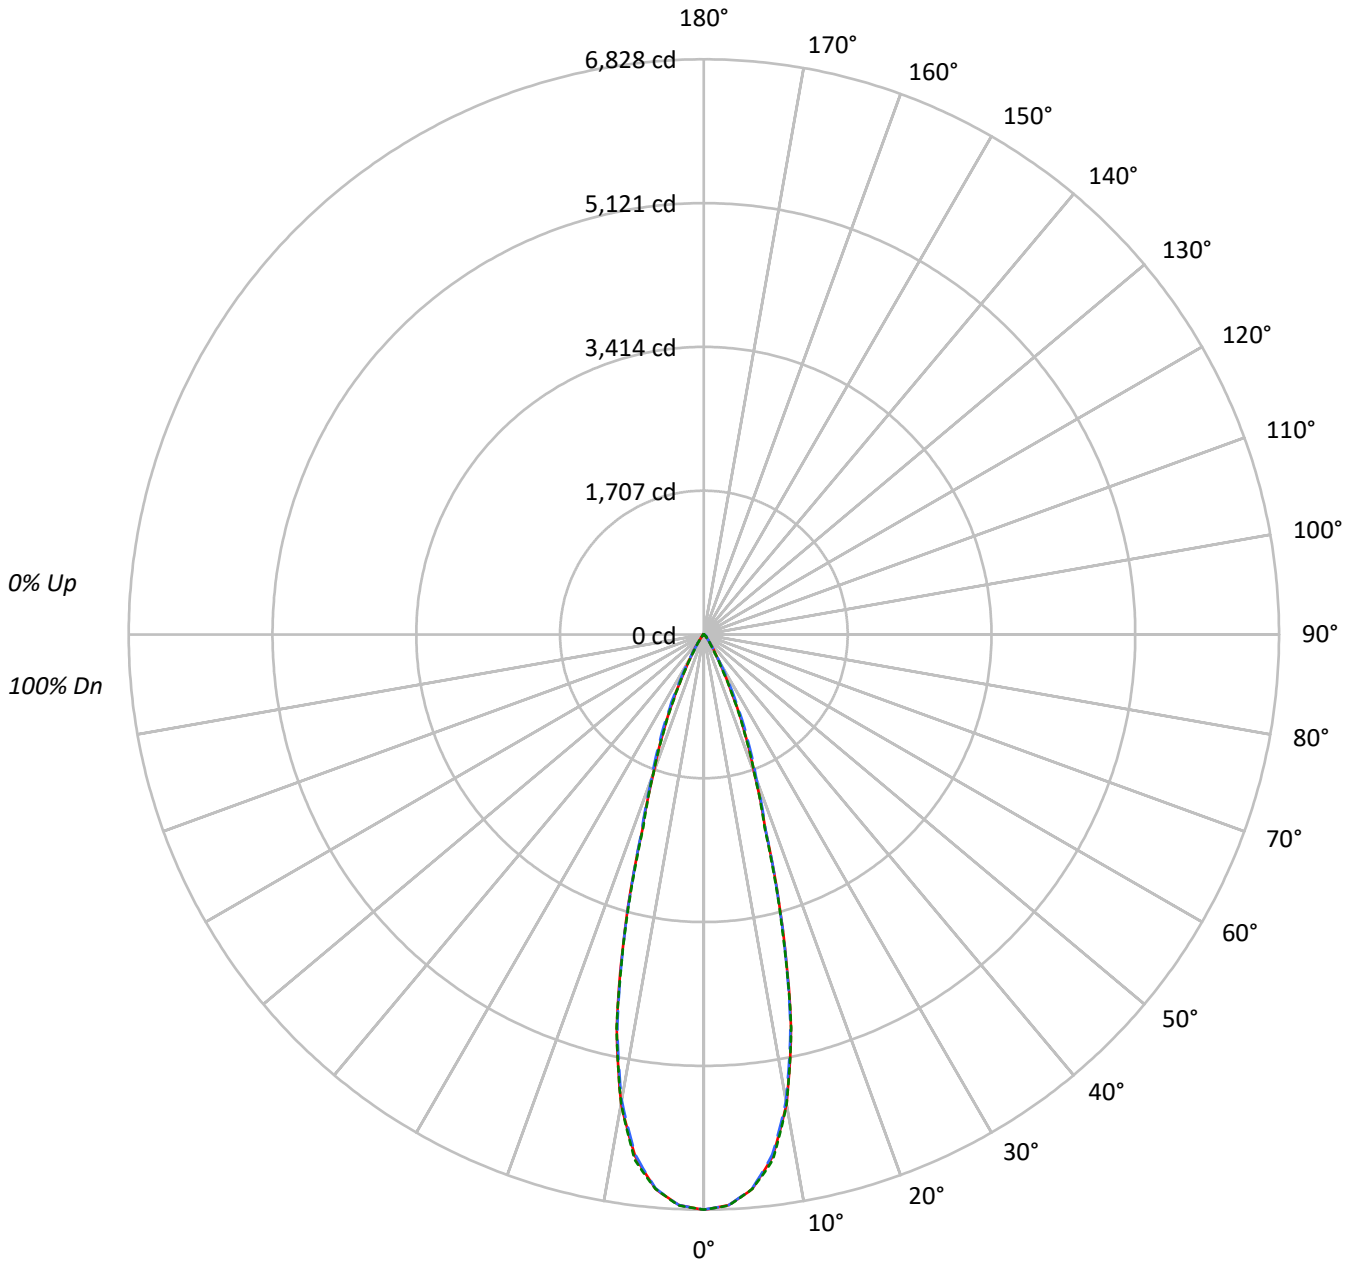



TEST NUMBER: P789582

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9030-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	522615	522615	522615
5°	507608	507016	507639
10°	439670	436569	439561
15°	286862	285316	283882
20°	142645	147997	142450
25°	71855	81027	70377
30°	28769	31350	25066
35°	13344	12783	10708
40°	5765	6395	5426
45°	4059	5044	4103
50°	1393	3668	1477
55°	801	1521	854
60°	566	674	566
65°	362	362	362
70°	224	157	224
75°	0	89	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 5044 cd/sqm



TEST NUMBER: P789582

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9030-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	600.4	28.3
10°-20°	966.9	45.5
20°-30°	417.8	19.7
30°-40°	95.2	4.5
40°-50°	32.7	1.5
50°-60°	8.0	0.4
60°-70°	2.1	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1985.2	93.5
0°-40°	2080.4	98.0
0°-60°	2121.1	99.9
0°-90°	2123.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2123.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	6828	6828	6828	6828	6828	
5°	6606	6600	6599	6612	6607	601
15°	3620	3576	3600	3589	3582	969
25°	851	883	959	860	833	407
35°	143	146	137	136	115	97
45°	38	47	47	47	38	27
55°	6	6	11	7	6	6
65°	2	2	2	2	2	2
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P789582

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9030-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	6827.7	6827.7	6827.7	6827.7	6827.7
2.5°	6782.4	6777.7	6780.4	6783.8	6785.1
5°	6606.4	6600.1	6598.7	6612.5	6606.8
7.5°	6251.4	6242.4	6228.6	6259.8	6289.0
10°	5656.8	5646.7	5616.9	5631.6	5655.4
12.5°	4778.8	4746.3	4745.6	4792.6	4786.2
15°	3620.0	3576.4	3600.5	3588.8	3582.4
17.5°	2434.3	2417.6	2449.8	2440.0	2398.1
20°	1751.2	1755.5	1816.9	1786.0	1748.8
22.5°	1277.8	1293.6	1366.3	1286.9	1257.7
25°	850.8	883.0	959.4	860.5	833.3
27.5°	523.3	538.0	615.5	516.6	501.8
30°	325.5	318.1	354.7	304.4	283.6
32.5°	213.5	204.1	215.9	193.8	177.0
35°	142.8	145.8	136.8	135.8	114.6
37.5°	89.2	102.6	90.5	96.5	73.7
40°	57.7	74.4	64.0	70.7	54.3
42.5°	47.3	57.3	52.6	56.0	48.3
45°	37.5	46.6	46.6	46.6	37.9
47.5°	20.8	31.2	39.9	31.8	22.1
50°	11.7	15.8	30.8	16.4	12.4
52.5°	8.0	9.1	21.1	9.4	8.4
55°	6.0	6.4	11.4	6.7	6.4
57.5°	4.7	5.0	6.0	5.0	4.7
60°	3.7	3.7	4.4	4.0	3.7
62.5°	2.7	2.7	3.0	2.7	2.7
65°	2.0	2.0	2.0	2.0	2.0
67.5°	1.0	1.3	1.3	1.3	1.3
70°	1.0	0.7	0.7	0.7	1.0
72.5°	0.7	0.3	0.3	0.3	0.3
75°	0.0	0.0	0.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)