

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789603

Luminaire Tested: LER6D15D010-EC6DR300215IC9050-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789603
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR300215IC9050-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2551.8 lumens
Efficiency: N/A
Efficacy: 161.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789603

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9050-6LBDP1H

Luminous Intensity Polar Plot

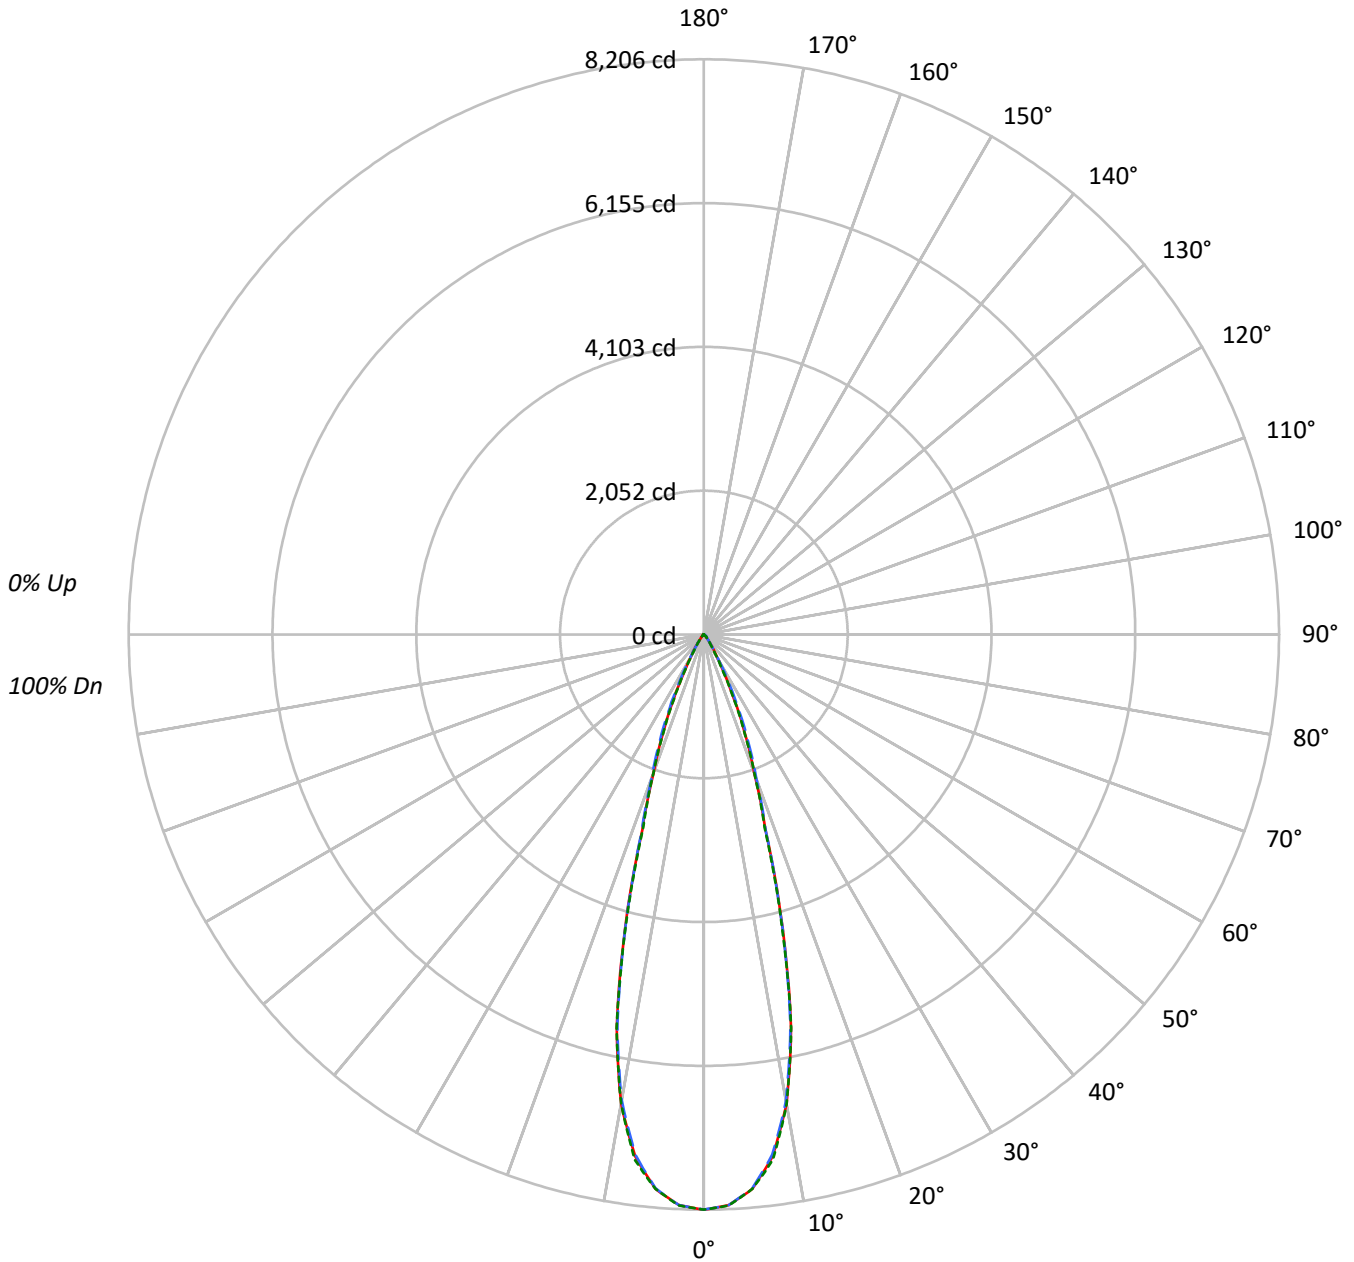



TEST NUMBER: P789603

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9050-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	628077	628077	628077
5°	610045	609331	610076
10°	528392	524662	528268
15°	344749	342895	341175
20°	171424	177859	171196
25°	86357	97378	84583
30°	34576	37670	30122
35°	16035	15362	12876
40°	6924	7684	6525
45°	4882	6062	4925
50°	1679	4418	1774
55°	974	1828	1028
60°	674	796	674
65°	435	435	435
70°	269	179	269
75°	0	118	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 6062 cd/sqm



TEST NUMBER: P789603

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9050-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	721.5	28.3
10°-20°	1162.1	45.5
20°-30°	502.2	19.7
30°-40°	114.5	4.5
40°-50°	39.3	1.5
50°-60°	9.6	0.4
60°-70°	2.5	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2385.8	93.5
0°-40°	2500.2	98.0
0°-60°	2549.1	99.9
0°-90°	2551.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2551.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	8206	8206	8206	8206	8206	
5°	7940	7932	7930	7947	7940	722
15°	4350	4298	4327	4313	4305	1165
25°	1022	1061	1153	1034	1002	489
35°	172	175	164	163	138	116
45°	45	56	56	56	46	32
55°	7	8	14	8	8	7
65°	2	2	2	2	2	2
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P789603

CATALOG NUMBER: LER6D15D010-EC6DR300215IC9050-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	8205.5	8205.5	8205.5	8205.5	8205.5
2.5°	8151.1	8145.5	8148.7	8152.7	8154.3
5°	7939.6	7931.9	7930.3	7946.8	7940.0
7.5°	7513.0	7502.1	7485.6	7523.0	7558.1
10°	6798.3	6786.2	6750.3	6768.1	6796.7
12.5°	5743.2	5704.1	5703.3	5759.7	5752.1
15°	4350.5	4298.1	4327.1	4313.0	4305.4
17.5°	2925.6	2905.4	2944.1	2932.4	2882.1
20°	2104.5	2109.8	2183.5	2146.4	2101.7
22.5°	1535.7	1554.6	1642.1	1546.6	1511.5
25°	1022.5	1061.1	1153.0	1034.1	1001.5
27.5°	628.9	646.6	739.7	620.8	603.1
30°	391.2	382.3	426.2	365.8	340.8
32.5°	256.6	245.3	259.4	232.9	212.7
35°	171.6	175.2	164.4	163.2	137.8
37.5°	107.2	123.3	108.8	116.0	88.6
40°	69.3	89.4	76.9	85.0	65.3
42.5°	56.8	68.9	63.2	67.3	58.0
45°	45.1	56.0	56.0	56.0	45.5
47.5°	25.0	37.5	47.9	38.3	26.6
50°	14.1	18.9	37.1	19.7	14.9
52.5°	9.7	10.9	25.4	11.3	10.1
55°	7.3	7.7	13.7	8.1	7.7
57.5°	5.6	6.0	7.3	6.0	5.6
60°	4.4	4.4	5.2	4.8	4.4
62.5°	3.2	3.2	3.6	3.2	3.2
65°	2.4	2.4	2.4	2.4	2.4
67.5°	1.2	1.6	1.6	1.6	1.6
70°	1.2	0.8	0.8	0.8	1.2
72.5°	0.8	0.4	0.4	0.4	0.4
75°	0.0	0.0	0.4	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)