

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789619

Luminaire Tested: LER6D15D010-EC6DR350215IC9027-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789619
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR350215IC9027-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2254.7 lumens
Efficiency: N/A
Efficacy: 142.7 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789619

CATALOG NUMBER: LER6D15D010-EC6DR350215IC9027-6LBDP1H

Luminous Intensity Polar Plot

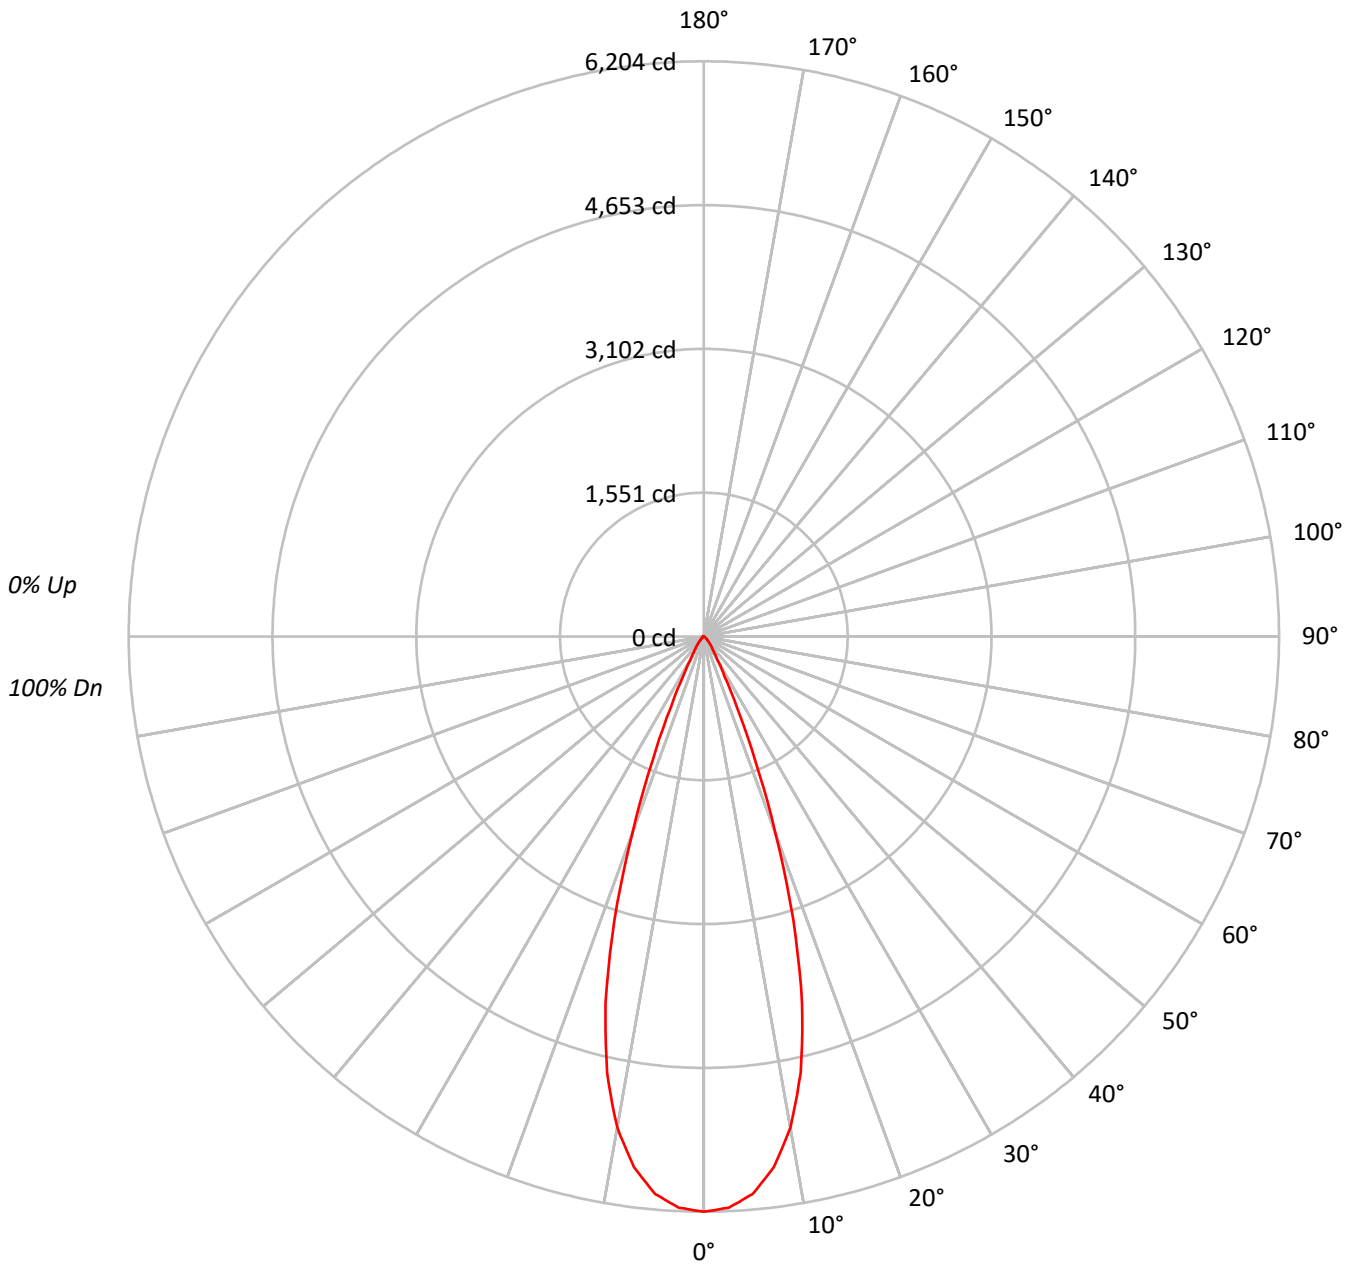



TEST NUMBER: P789619

CATALOG NUMBER: LER6D15D010-EC6DR350215IC9027-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96																			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92																			
3	106	101	97	94	105	100	96	94	97	95	92	95	93	91	93	91	89	88																			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84																			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78																			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	677865
5°	661929
10°	596580
15°	463036
20°	262626
25°	102171
30°	38114
35°	20888
40°	13650
45°	8313
50°	5286
55°	3734
60°	2732
65°	1499
70°	96
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8313 cd/sqm



TEST NUMBER: P789619

CATALOG NUMBER: LER6D15D010-EC6DR350215IC9027-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	555.1	24.6
10°-20°	1083.7	48.1
20°-30°	442.0	19.6
30°-40°	105.7	4.7
40°-50°	44.1	2.0
50°-60°	18.2	0.8
60°-70°	5.7	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2080.8	92.3
0°-40°	2186.5	97.0
0°-60°	2248.8	99.7
0°-90°	2254.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2254.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6204	
5°	6035	555
15°	4094	1084
25°	848	442
35°	157	106
45°	54	44
55°	20	18
65°	6	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P789619

CATALOG NUMBER: LER6D15D010-EC6DR350215IC9027-6LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	6204.1
2.5°	6166.9
5°	6035.2
7.5°	5772.7
10°	5377.2
12.5°	4820.3
15°	4093.5
17.5°	3204.7
20°	2258.7
22.5°	1440.3
25°	847.5
27.5°	479.1
30°	302.1
32.5°	212.1
35°	156.6
37.5°	121.1
40°	95.7
42.5°	73.8
45°	53.8
47.5°	40.3
50°	31.1
52.5°	24.7
55°	19.6
57.5°	15.9
60°	12.5
62.5°	9.1
65°	5.8
67.5°	2.0
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)