

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789677

Luminaire Tested: LER6D15D010-EC6DR400215IC9030-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P789677  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D15D010-EC6DR400215IC9030-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2515.5 lumens  
Efficiency: N/A  
Efficacy: 159.2 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P789677  
CATALOG NUMBER: LER6D15D010-EC6DR400215IC9030-6LBS1B

### Luminous Intensity Polar Plot

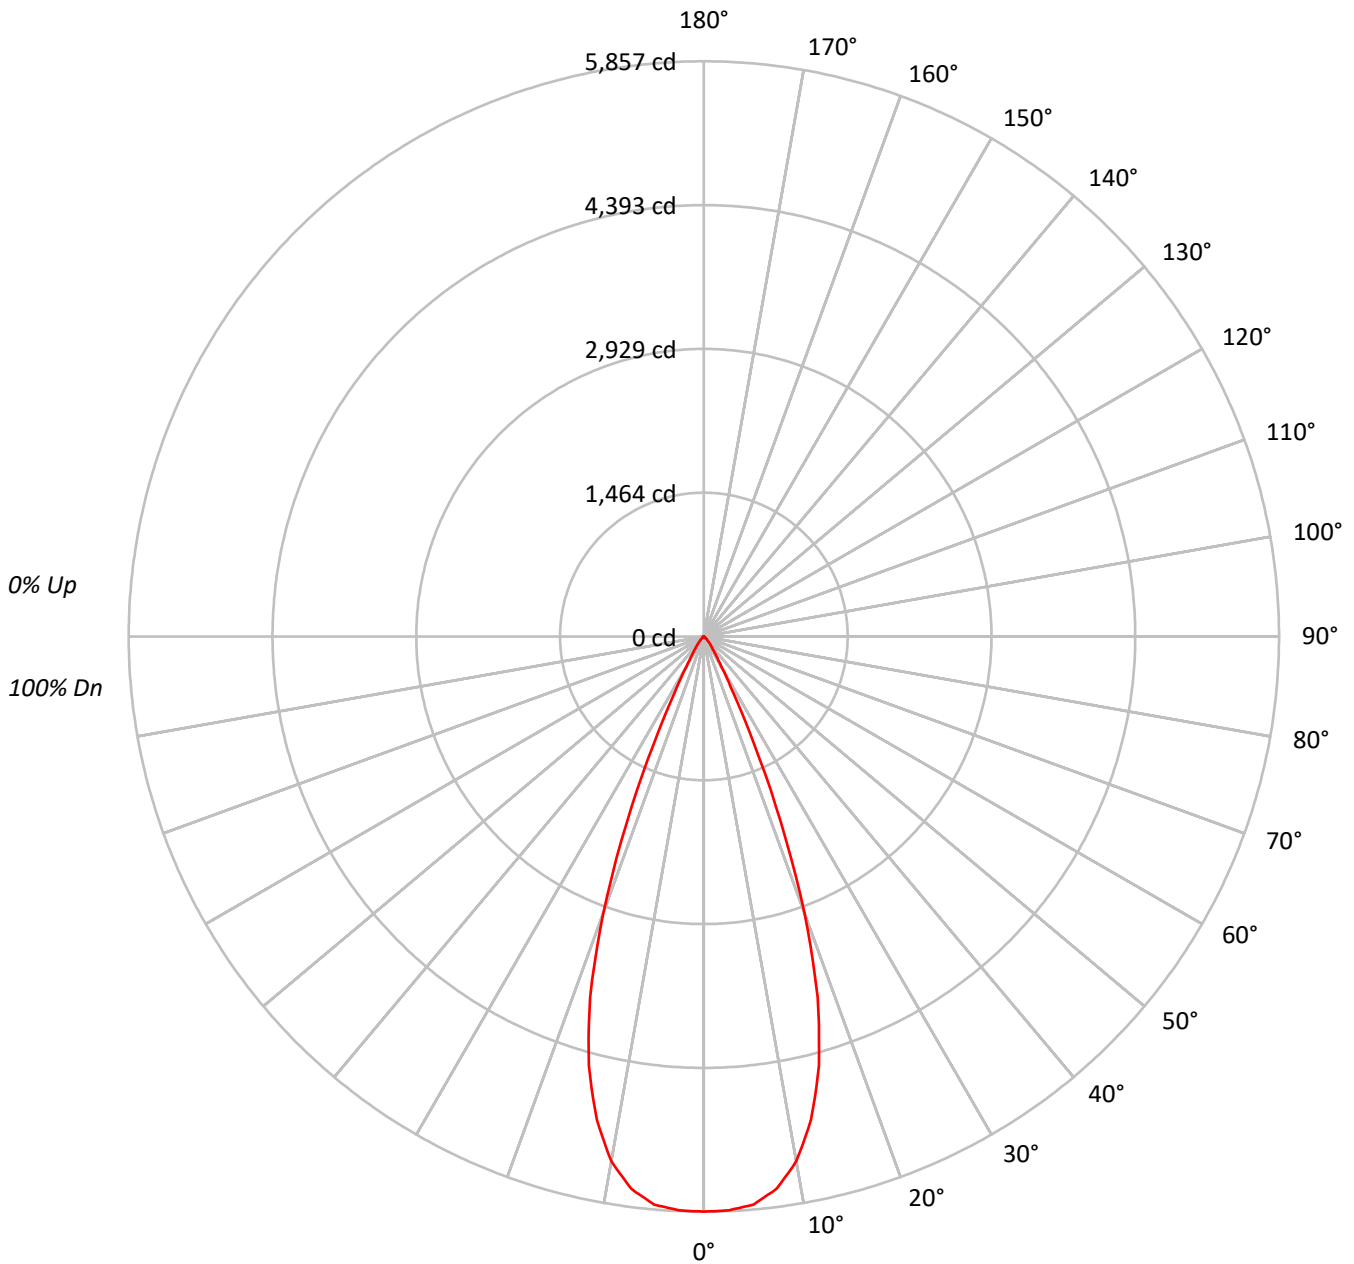



TEST NUMBER: P789677

CATALOG NUMBER: LER6D15D010-EC6DR400215IC9030-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96		
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92		
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88		
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84		
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81		
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77		
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74		
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72		
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69		
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	639907
5°	636791
10°	601906
15°	511699
20°	348760
25°	145523
30°	45759
35°	21261
40°	11767
45°	5393
50°	2618
55°	1429
60°	743
65°	259
70°	96
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5393 cd/sqm



TEST NUMBER: P789677

CATALOG NUMBER: LER6D15D010-EC6DR400215IC9030-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	542.1	21.6
10°-20°	1214.5	48.3
20°-30°	608.0	24.2
30°-40°	111.4	4.4
40°-50°	30.8	1.2
50°-60°	7.2	0.3
60°-70°	1.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2364.6	94.0
0°-40°	2476.1	98.4
0°-60°	2514.0	99.9
0°-90°	2515.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2515.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5857	
5°	5806	542
15°	4524	1215
25°	1207	608
35°	159	111
45°	35	31
55°	8	7
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P789677

CATALOG NUMBER: LER6D15D010-EC6DR400215IC9030-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5856.7
2.5°	5848.1
5°	5806.0
7.5°	5671.9
10°	5425.2
12.5°	5040.7
15°	4523.7
17.5°	3851.4
20°	2999.5
22.5°	2044.9
25°	1207.1
27.5°	638.1
30°	362.7
32.5°	234.4
35°	159.4
37.5°	113.9
40°	82.5
42.5°	56.5
45°	34.9
47.5°	22.2
50°	15.4
52.5°	10.9
55°	7.5
57.5°	4.8
60°	3.4
62.5°	2.1
65°	1.0
67.5°	0.7
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)