

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789893

Luminaire Tested: LER6D15D010-EC6DR650215IC9024-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P789893  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D15D010-EC6DR650215IC9024-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1956.6 lumens  
Efficiency: N/A  
Efficacy: 123.8 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P789893  
CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBDP1LI

### Luminous Intensity Polar Plot

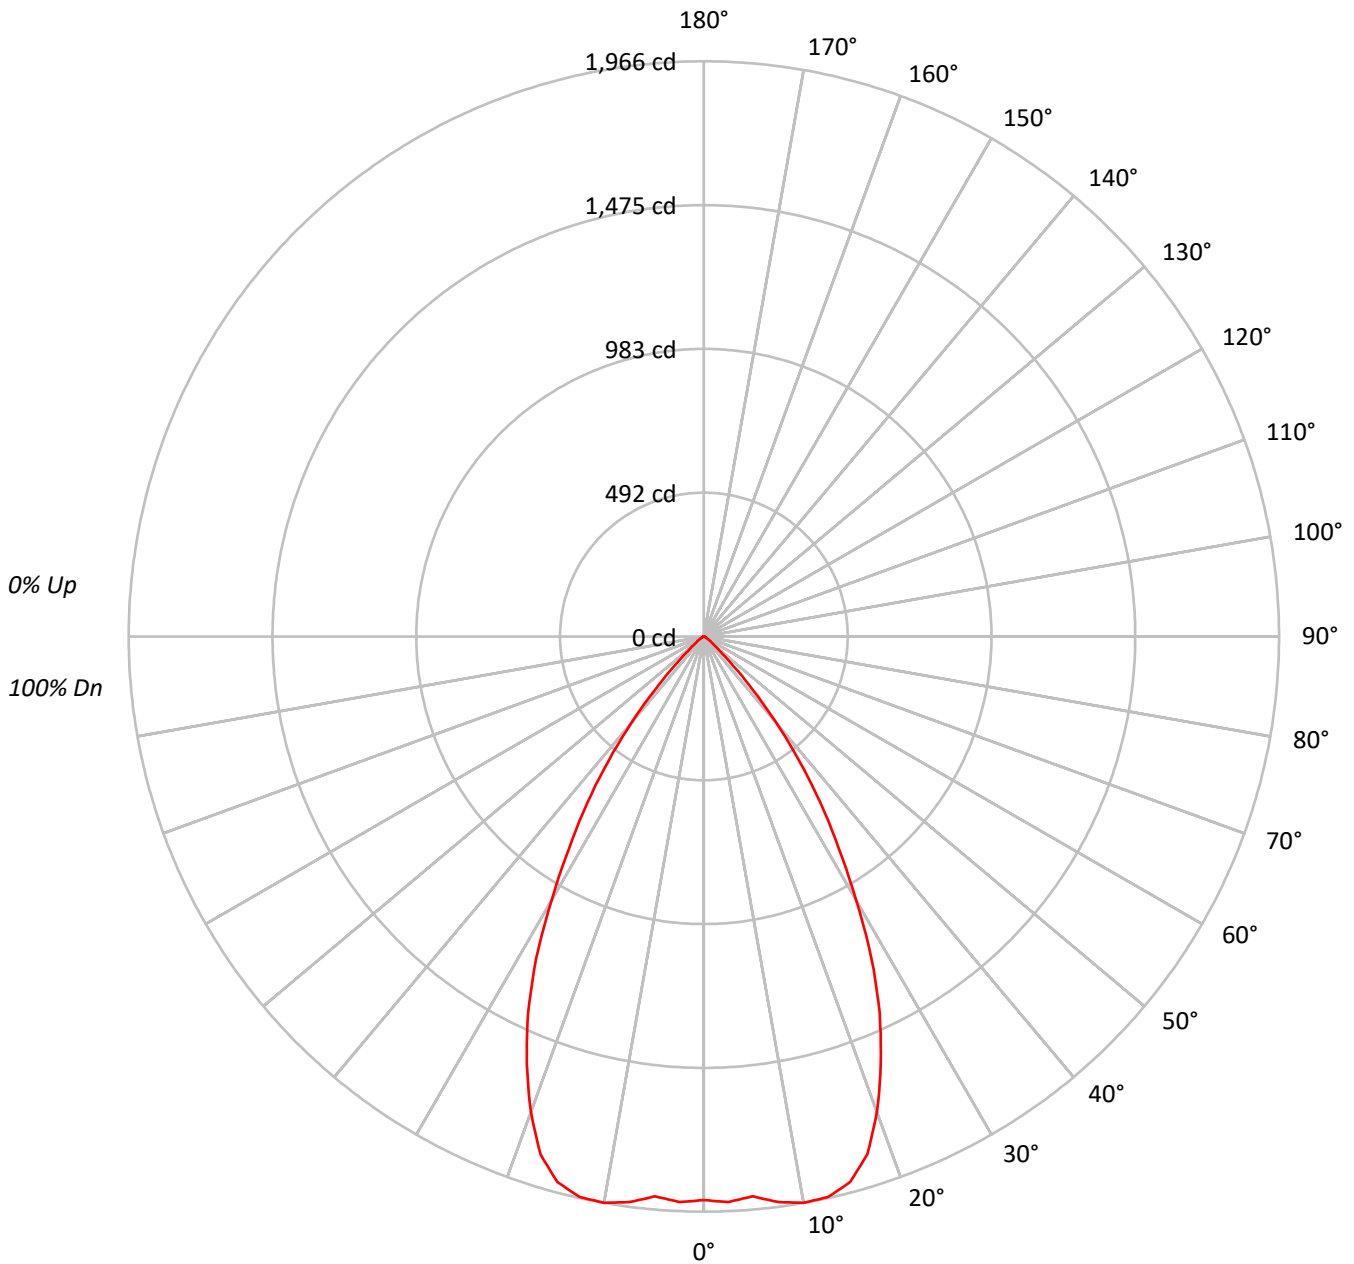



TEST NUMBER: P789893

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	210480
5°	210648
10°	218065
15°	218425
20°	201106
25°	171346
30°	131172
35°	92674
40°	54699
45°	22204
50°	8057
55°	4477
60°	2579
65°	1422
70°	1501
75°	1140
80°	1195
85°	1003

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22204 cd/sqm



TEST NUMBER: P789893

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	185.5	9.5
10°-20°	535.1	27.3
20°-30°	642.0	32.8
30°-40°	431.4	22.0
40°-50°	129.2	6.6
50°-60°	22.8	1.2
60°-70°	6.5	0.3
70°-80°	3.2	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1362.5	69.6
0°-40°	1794.0	91.7
0°-60°	1945.9	99.5
0°-90°	1956.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1956.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1926	
5°	1921	185
15°	1931	535
25°	1421	642
35°	695	431
45°	144	129
55°	24	23
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P789893

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1926.4
2.5°	1934.6
5°	1920.6
7.5°	1949.6
10°	1965.5
12.5°	1961.7
15°	1931.0
17.5°	1856.0
20°	1729.6
22.5°	1580.6
25°	1421.3
27.5°	1241.5
30°	1039.7
32.5°	856.8
35°	694.8
37.5°	534.6
40°	383.5
42.5°	250.5
45°	143.7
47.5°	76.1
50°	47.4
52.5°	32.9
55°	23.5
57.5°	17.0
60°	11.8
62.5°	7.7
65°	5.5
67.5°	4.9
70°	4.7
72.5°	3.6
75°	2.7
77.5°	2.5
80°	1.9
82.5°	1.4
85°	0.8
87.5°	0.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)