

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789898

Luminaire Tested: LER6D15D010-EC6DR650215IC9024-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789898
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR650215IC9024-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1863.8 lumens
Efficiency: N/A
Efficacy: 118.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789898

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBS1MW

Luminous Intensity Polar Plot

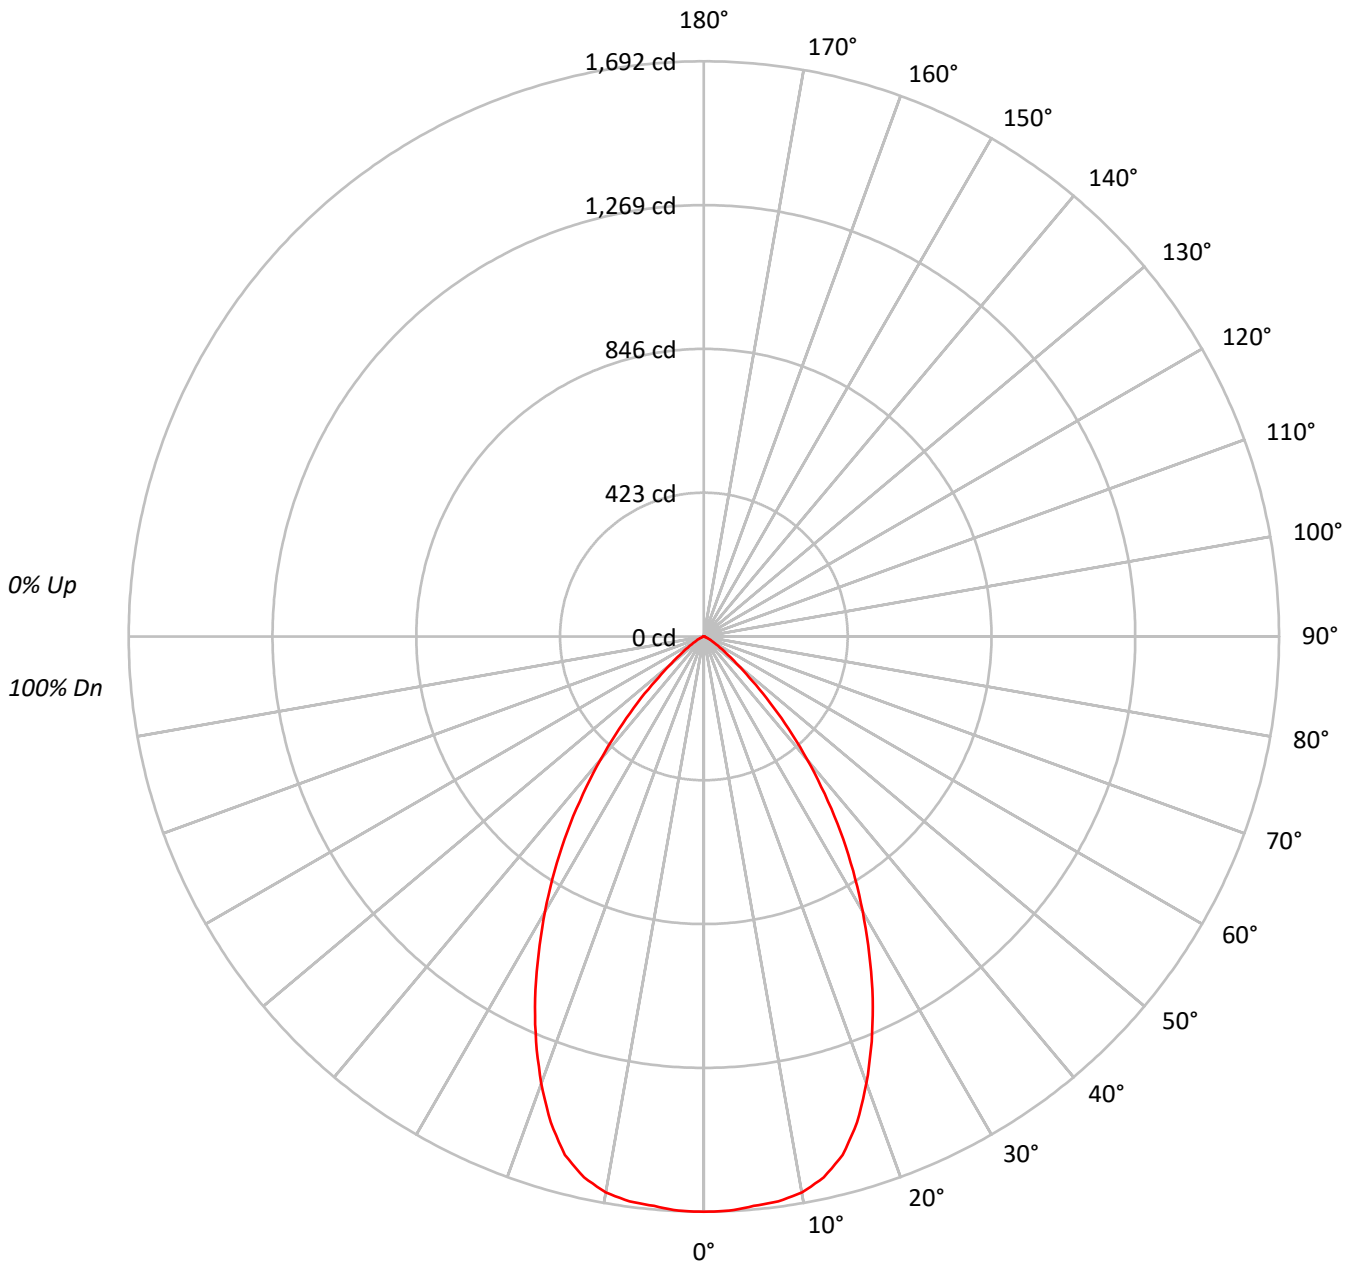



TEST NUMBER: P789898

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	98837
5°	98587
10°	98505
15°	95467
20°	86913
25°	75738
30°	62995
35°	49916
40°	36024
45°	22755
50°	11866
55°	6303
60°	3317
65°	1824
70°	768
75°	835
80°	572
85°	469

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22755 cd/sqm



TEST NUMBER: P789898

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.0	8.6
10°-20°	438.2	23.5
20°-30°	535.7	28.7
30°-40°	434.6	23.3
40°-50°	216.6	11.6
50°-60°	60.4	3.2
60°-70°	13.7	0.7
70°-80°	3.6	0.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1134.0	60.8
0°-40°	1568.6	84.2
0°-60°	1845.6	99.0
0°-90°	1863.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1863.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1692	
5°	1682	160
15°	1579	438
25°	1175	536
35°	700	435
45°	276	217
55°	62	60
65°	13	14
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P789898

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9024-6LBS1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1692.3
2.5°	1691.1
5°	1681.6
7.5°	1676.2
10°	1661.0
12.5°	1630.1
15°	1578.9
17.5°	1498.8
20°	1398.4
22.5°	1289.9
25°	1175.3
27.5°	1052.7
30°	934.1
32.5°	816.9
35°	700.1
37.5°	583.4
40°	472.5
42.5°	368.6
45°	275.5
47.5°	192.0
50°	130.6
52.5°	90.0
55°	61.9
57.5°	41.8
60°	28.4
62.5°	19.6
65°	13.2
67.5°	6.7
70°	4.5
72.5°	4.2
75°	3.7
77.5°	2.5
80°	1.7
82.5°	1.2
85°	0.7
87.5°	0.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)