

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789903

Luminaire Tested: LER6D15D010-EC6DR650215IC9027-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789903
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR650215IC9027-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2021.6 lumens
Efficiency: N/A
Efficacy: 127.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P789903
CATALOG NUMBER: LER6D15D010-EC6DR650215IC9027-6LBS1B

Luminous Intensity Polar Plot

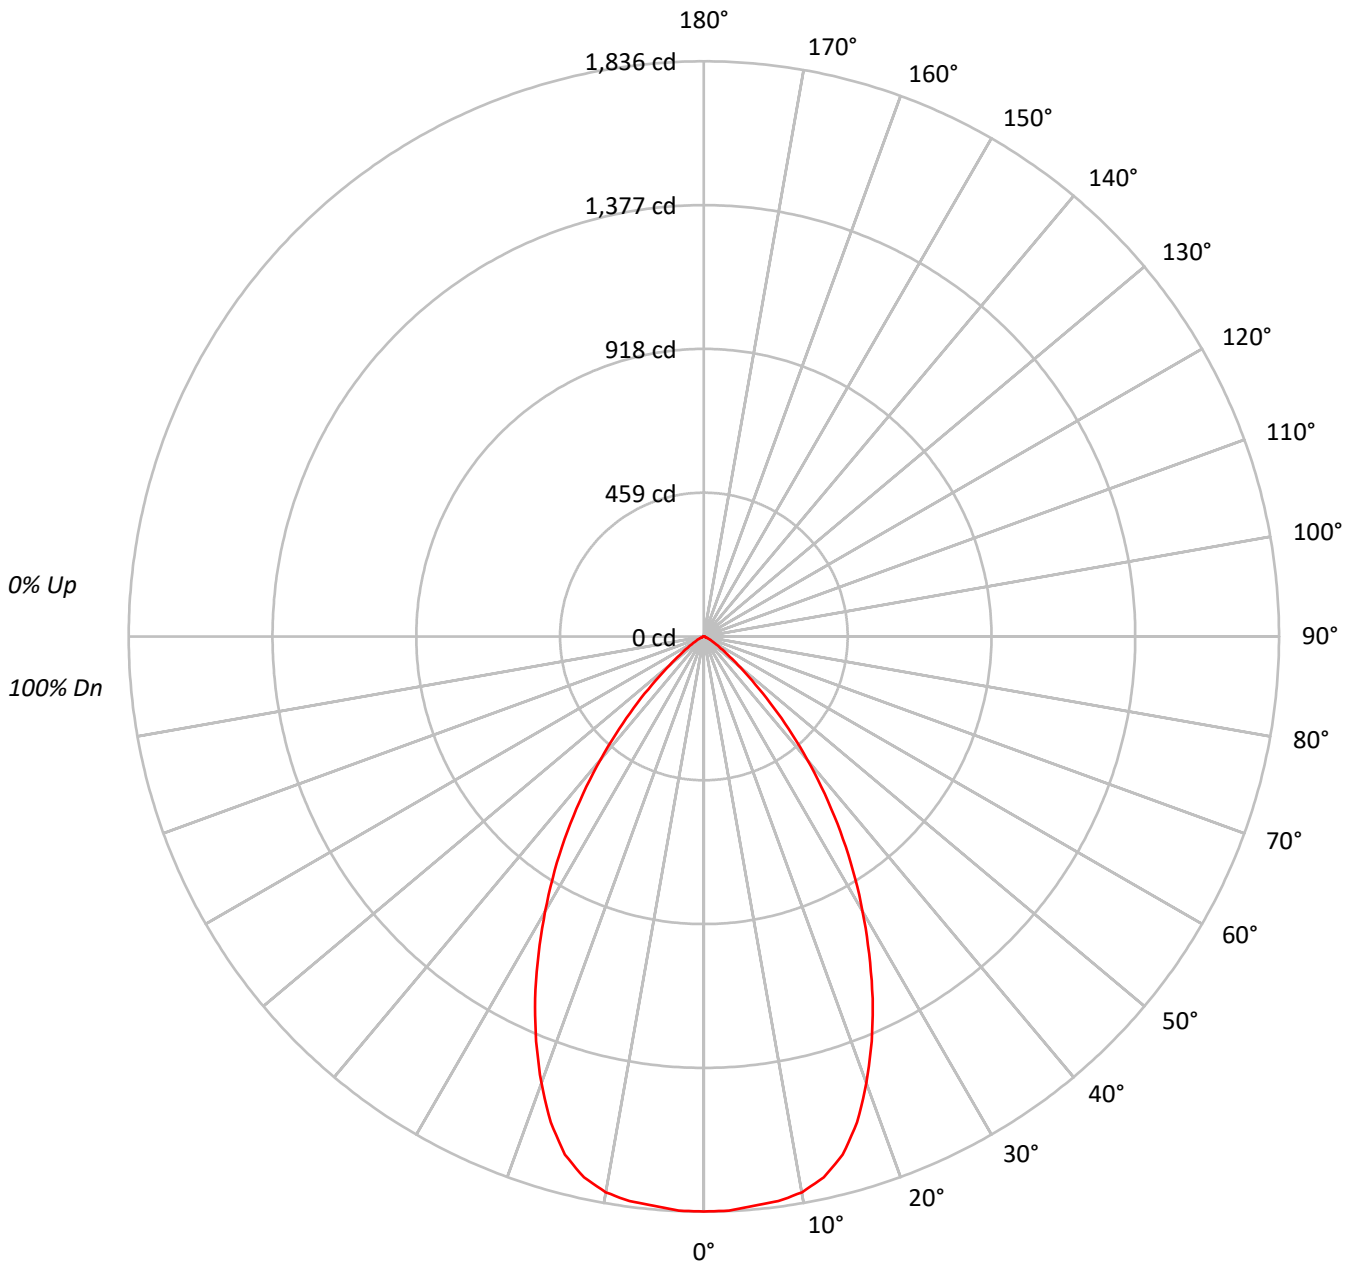



TEST NUMBER: P789903

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9027-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	107206
5°	106936
10°	106844
15°	103551
20°	94266
25°	82150
30°	68322
35°	54137
40°	39073
45°	24688
50°	12866
55°	6843
60°	3598
65°	1976
70°	837
75°	903
80°	639
85°	536

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24688 cd/sqm



TEST NUMBER: P789903

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9027-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	173.6	8.6
10°-20°	475.3	23.5
20°-30°	581.0	28.7
30°-40°	471.4	23.3
40°-50°	234.9	11.6
50°-60°	65.5	3.2
60°-70°	14.9	0.7
70°-80°	3.9	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1230.0	60.8
0°-40°	1701.4	84.2
0°-60°	2001.8	99.0
0°-90°	2021.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2021.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1836	
5°	1824	174
15°	1713	475
25°	1275	581
35°	759	471
45°	299	235
55°	67	66
65°	14	15
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P789903

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9027-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1835.6
2.5°	1834.2
5°	1824.0
7.5°	1818.0
10°	1801.6
12.5°	1768.1
15°	1712.6
17.5°	1625.7
20°	1516.7
22.5°	1399.1
25°	1274.8
27.5°	1141.8
30°	1013.1
32.5°	886.1
35°	759.3
37.5°	632.8
40°	512.5
42.5°	399.8
45°	298.9
47.5°	208.2
50°	141.6
52.5°	97.6
55°	67.2
57.5°	45.3
60°	30.8
62.5°	21.3
65°	14.3
67.5°	7.3
70°	4.9
72.5°	4.6
75°	4.0
77.5°	2.7
80°	1.9
82.5°	1.3
85°	0.8
87.5°	0.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)