

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789907

Luminaire Tested: LER6D15D010-EC6DR650215IC9030-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P789907
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR650215IC9030-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1591.0 lumens
Efficiency: N/A
Efficacy: 100.7 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789907

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9030-6LBDP1B

Luminous Intensity Polar Plot

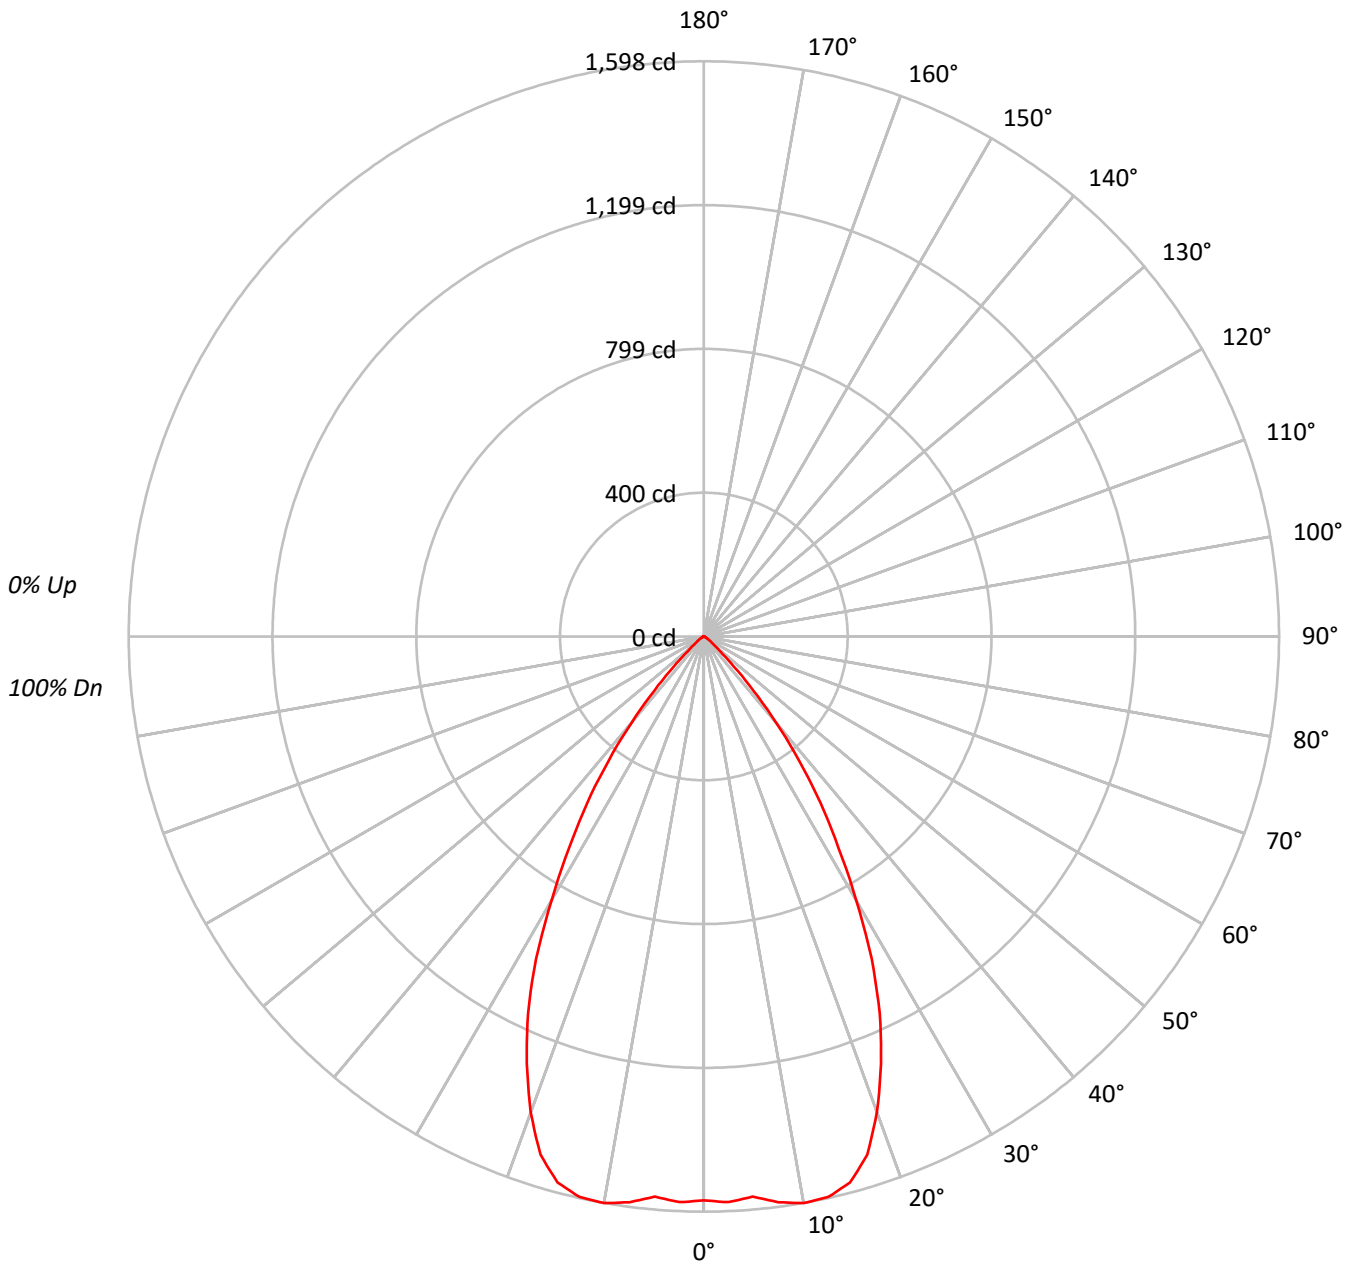



TEST NUMBER: P789907

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9030-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	171146
5°	171295
10°	177325
15°	177613
20°	163526
25°	139326
30°	106659
35°	75361
40°	44486
45°	18063
50°	6544
55°	3638
60°	2098
65°	1163
70°	1214
75°	929
80°	1007
85°	878

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18063 cd/sqm



TEST NUMBER: P789907

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9030-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	150.8	9.5
10°-20°	435.1	27.3
20°-30°	522.0	32.8
30°-40°	350.8	22.0
40°-50°	105.0	6.6
50°-60°	18.5	1.2
60°-70°	5.3	0.3
70°-80°	2.6	0.2
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1107.9	69.6
0°-40°	1458.8	91.7
0°-60°	1582.3	99.5
0°-90°	1591.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1591.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1566	
5°	1562	151
15°	1570	435
25°	1156	522
35°	565	351
45°	117	105
55°	19	19
65°	4	5
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P789907

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9030-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	1566.4
2.5°	1573.1
5°	1561.8
7.5°	1585.4
10°	1598.3
12.5°	1595.2
15°	1570.2
17.5°	1509.2
20°	1406.4
22.5°	1285.3
25°	1155.7
27.5°	1009.5
30°	845.4
32.5°	696.7
35°	565.0
37.5°	434.7
40°	311.9
42.5°	203.7
45°	116.9
47.5°	61.9
50°	38.5
52.5°	26.7
55°	19.1
57.5°	13.8
60°	9.6
62.5°	6.2
65°	4.5
67.5°	4.0
70°	3.8
72.5°	2.9
75°	2.2
77.5°	2.0
80°	1.6
82.5°	1.1
85°	0.7
87.5°	0.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)