

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789917

Luminaire Tested: LER6D15D010-EC6DR650215IC9035-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P789917  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D15D010-EC6DR650215IC9035-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2367.5 lumens  
Efficiency: N/A  
Efficacy: 149.8 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P789917  
CATALOG NUMBER: LER6D15D010-EC6DR650215IC9035-6LBDP1LI

### Luminous Intensity Polar Plot

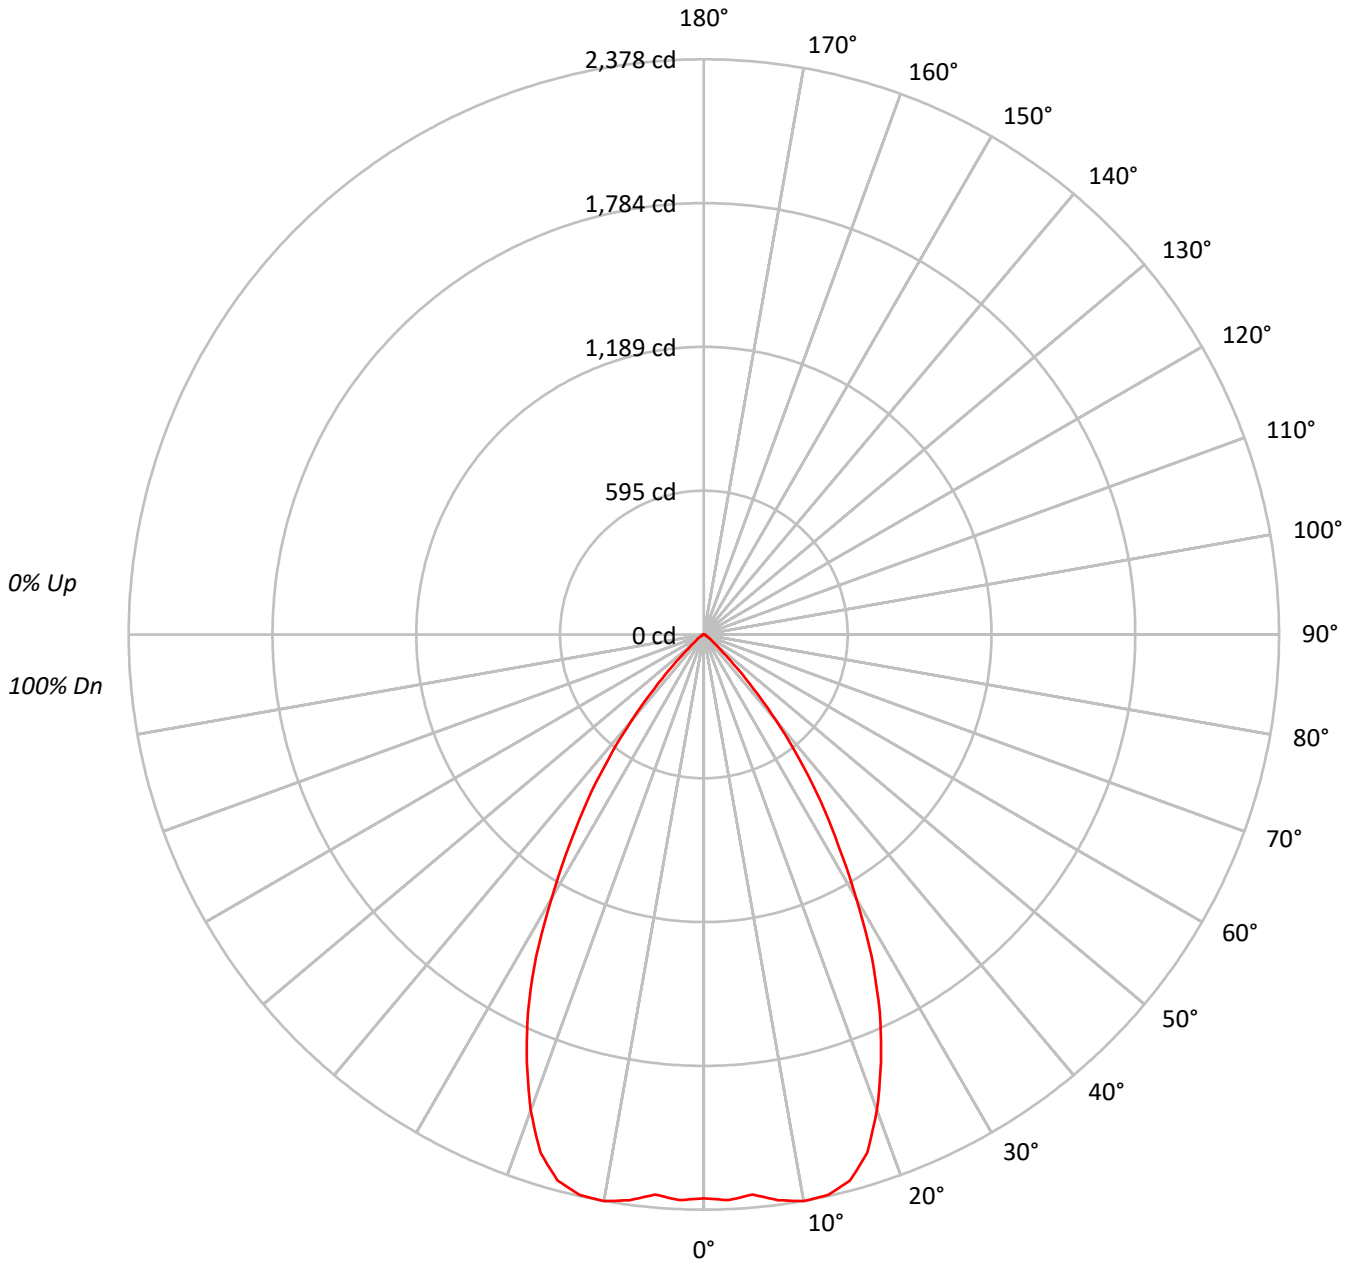



TEST NUMBER: P789917

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9035-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	254687
5°	254892
10°	263875
15°	264305
20°	243336
25°	207332
30°	158726
35°	112135
40°	66194
45°	26871
50°	9740
55°	5429
60°	3103
65°	1706
70°	1789
75°	1393
80°	1447
85°	1254

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 26871 cd/sqm



TEST NUMBER: P789917

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9035-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	224.5	9.5
10°-20°	647.5	27.3
20°-30°	776.8	32.8
30°-40°	522.0	22.1
40°-50°	156.3	6.6
50°-60°	27.6	1.2
60°-70°	7.8	0.3
70°-80°	3.8	0.2
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1648.7	69.6
0°-40°	2170.8	91.7
0°-60°	2354.6	99.5
0°-90°	2367.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2367.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2331	
5°	2324	224
15°	2337	647
25°	1720	777
35°	841	522
45°	174	156
55°	28	28
65°	7	8
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P789917

CATALOG NUMBER: LER6D15D010-EC6DR650215IC9035-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2331.0
2.5°	2340.9
5°	2324.0
7.5°	2359.1
10°	2378.4
12.5°	2373.7
15°	2336.6
17.5°	2245.9
20°	2092.8
22.5°	1912.6
25°	1719.8
27.5°	1502.2
30°	1258.1
32.5°	1036.8
35°	840.7
37.5°	646.9
40°	464.1
42.5°	303.1
45°	173.9
47.5°	92.1
50°	57.3
52.5°	39.7
55°	28.5
57.5°	20.5
60°	14.2
62.5°	9.3
65°	6.6
67.5°	6.0
70°	5.6
72.5°	4.3
75°	3.3
77.5°	3.0
80°	2.3
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)