

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789953

Luminaire Tested: LER6D15D010-EC6DR700215IC9030-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P789953
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR700215IC9030-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1431.5 lumens
Efficiency: N/A
Efficacy: 90.6 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789953

CATALOG NUMBER: LER6D15D010-EC6DR700215IC9030-6LBDP1B

Luminous Intensity Polar Plot

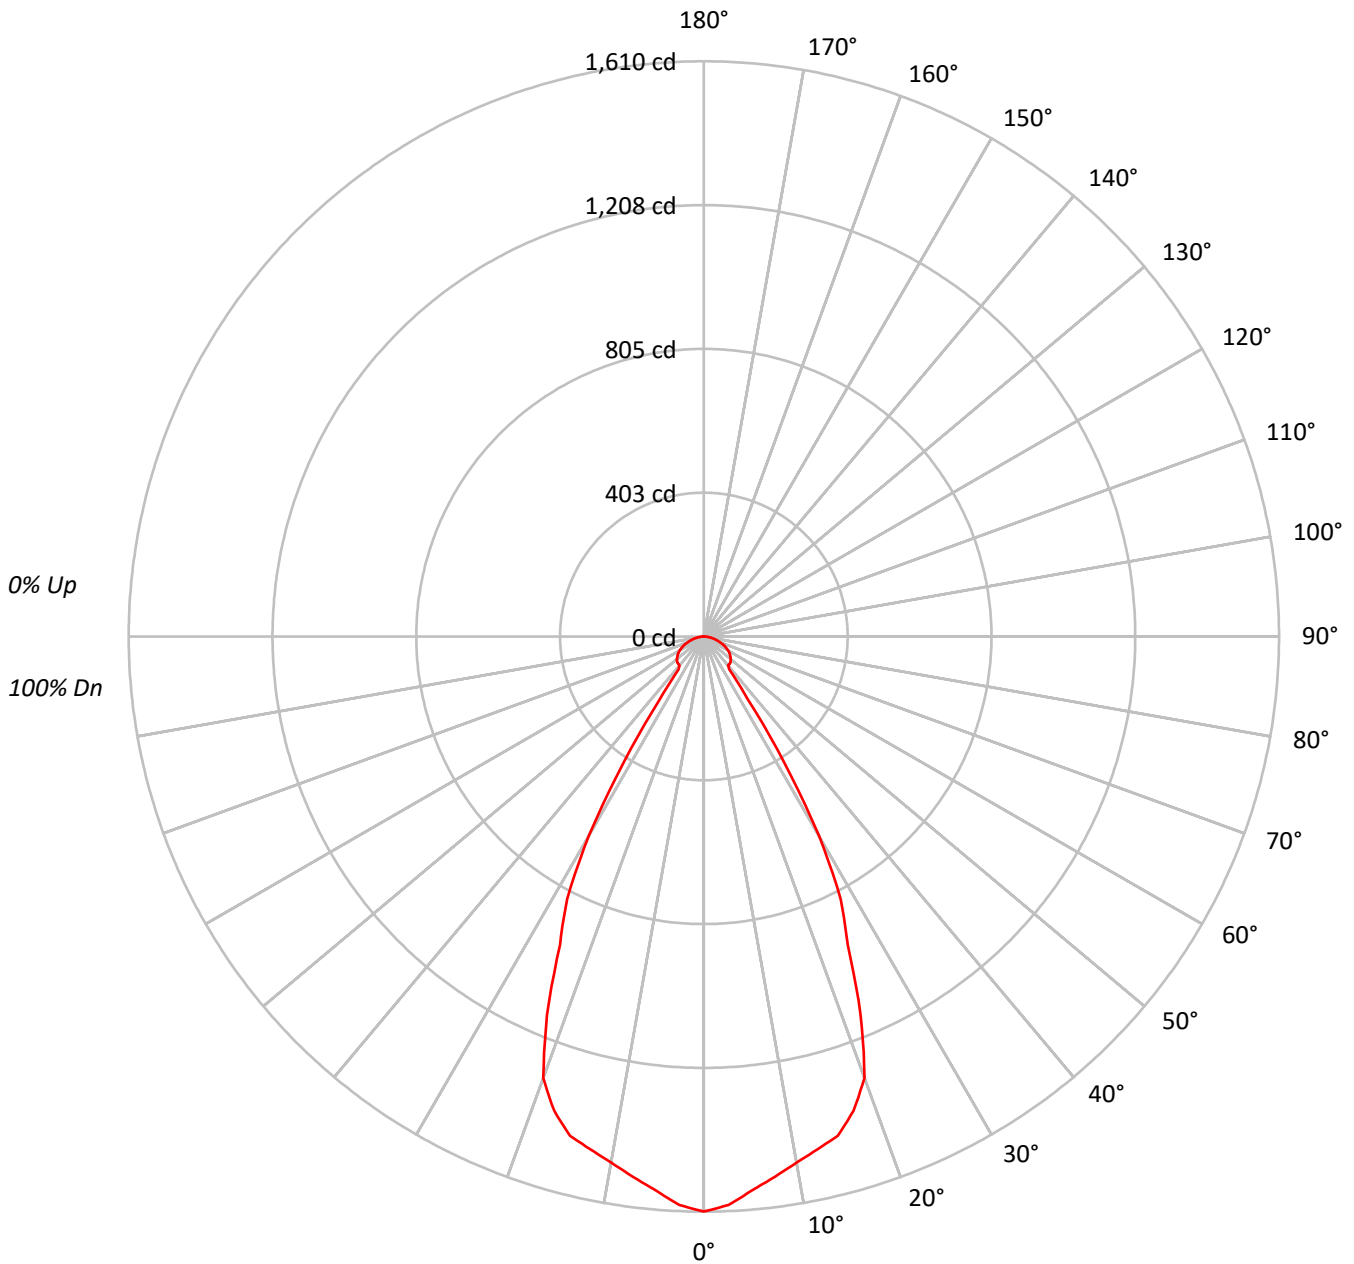



TEST NUMBER: P789953

CATALOG NUMBER: LER6D15D010-EC6DR700215IC9030-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	175855
5°	170626
10°	165876
15°	163689
20°	152852
25°	114829
30°	81174
35°	28757
40°	15119
45°	16101
50°	16675
55°	16992
60°	17088
65°	16727
70°	15781
75°	14649
80°	12962
85°	10530

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 17102 cd/sqm



TEST NUMBER: P789953

CATALOG NUMBER: LER6D15D010-EC6DR700215IC9030-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.7	10.3
10°-20°	402.5	28.1
20°-30°	443.3	31.0
30°-40°	169.4	11.8
40°-50°	80.0	5.6
50°-60°	79.5	5.6
60°-70°	63.6	4.4
70°-80°	36.6	2.6
80°-90°	9.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	992.5	69.3
0°-40°	1161.9	81.2
0°-60°	1321.3	92.3
0°-90°	1431.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1431.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1610	
5°	1556	147
15°	1447	402
25°	952	443
35°	216	169
45°	104	80
55°	89	80
65°	65	64
75°	35	37
85°	8	10
90°	0	



TEST NUMBER: P789953

CATALOG NUMBER: LER6D15D010-EC6DR700215IC9030-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1609.5
2.5°	1592.7
5°	1555.7
7.5°	1524.9
10°	1495.1
12.5°	1469.8
15°	1447.1
17.5°	1392.4
20°	1314.6
22.5°	1147.0
25°	952.5
27.5°	829.2
30°	643.4
32.5°	415.6
35°	215.6
37.5°	116.5
40°	106.0
42.5°	105.2
45°	104.2
47.5°	101.9
50°	98.1
52.5°	93.8
55°	89.2
57.5°	84.1
60°	78.2
62.5°	71.6
65°	64.7
67.5°	57.1
70°	49.4
72.5°	41.8
75°	34.7
77.5°	27.3
80°	20.6
82.5°	14.5
85°	8.4
87.5°	3.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)