

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790087

Luminaire Tested: LER6D20D010-EC6DR2015309027-6LBDP1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P790087  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D20D010-EC6DR2015309027-6LBDDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1687.1 lumens  
Efficiency: N/A  
Efficacy: 73.0 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 23.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P790087  
CATALOG NUMBER: LER6D20D010-EC6DR2015309027-6LBDP1B

### Luminous Intensity Polar Plot

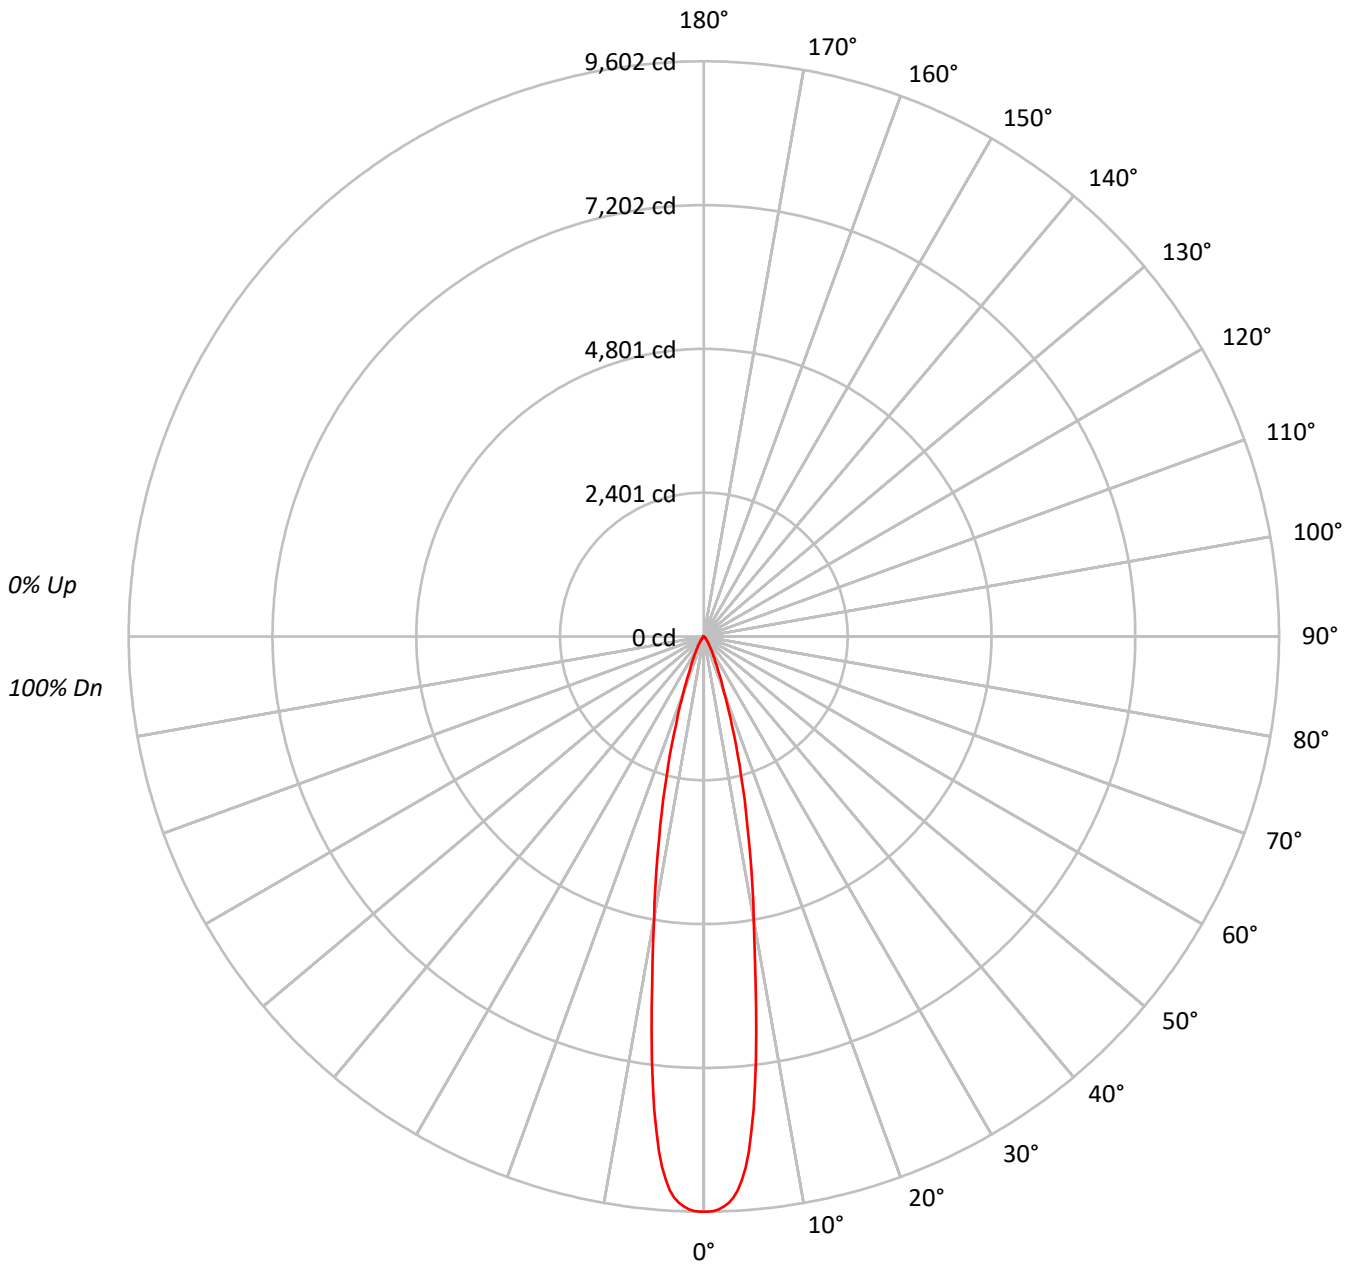



TEST NUMBER: P790087

CATALOG NUMBER: LER6D20D010-EC6DR2015309027-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	96	95															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1049165
5°	946544
10°	531255
15°	270040
20°	114331
25°	52779
30°	27945
35°	15059
40°	8044
45°	4759
50°	2754
55°	1467
60°	940
65°	672
70°	288
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4759 cd/sqm



TEST NUMBER: P790087

CATALOG NUMBER: LER6D20D010-EC6DR2015309027-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	683.7	40.5
10°-20°	673.2	39.9
20°-30°	219.9	13.0
30°-40°	74.9	4.4
40°-50°	25.2	1.5
50°-60°	7.6	0.4
60°-70°	2.5	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1576.8	93.5
0°-40°	1651.7	97.9
0°-60°	1684.4	99.8
0°-90°	1687.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1687.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9602	
5°	8630	684
15°	2387	673
25°	438	220
35°	113	75
45°	31	25
55°	8	8
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790087

CATALOG NUMBER: LER6D20D010-EC6DR2015309027-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9602.4
0.5°	9602.4
1°	9590.4
1.5°	9566.5
2°	9522.9
2.5°	9464.7
3°	9382.6
3.5°	9268.0
4°	9097.9
4.5°	8891.0
5°	8630.2
5.5°	8287.3
6°	7935.9
6.5°	7533.1
7°	7138.9
7.5°	6677.2
8°	6265.1
8.5°	5850.4
9°	5467.3
9.5°	5115.9
10°	4788.4
12.5°	3438.2
15°	2387.3
17.5°	1559.6
20°	983.3
22.5°	637.0
25°	437.8
27.5°	307.8
30°	221.5
32.5°	159.0
35°	112.9
37.5°	78.7
40°	56.4
42.5°	41.0
45°	30.8
47.5°	23.9
50°	16.2
52.5°	10.3
55°	7.7
57.5°	6.0
60°	4.3
62.5°	3.4
65°	2.6



TEST NUMBER: P790087

CATALOG NUMBER: LER6D20D010-EC6DR2015309027-6LBDP1B

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.7
70°		0.9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)