

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790095

Luminaire Tested: LER6D20D010-EC6DR2015309030-6LBDP1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P790095  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D20D010-EC6DR2015309030-6LBDDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1742.0 lumens  
Efficiency: N/A  
Efficacy: 75.4 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 23.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P790095  
CATALOG NUMBER: LER6D20D010-EC6DR2015309030-6LBDP1B

### Luminous Intensity Polar Plot

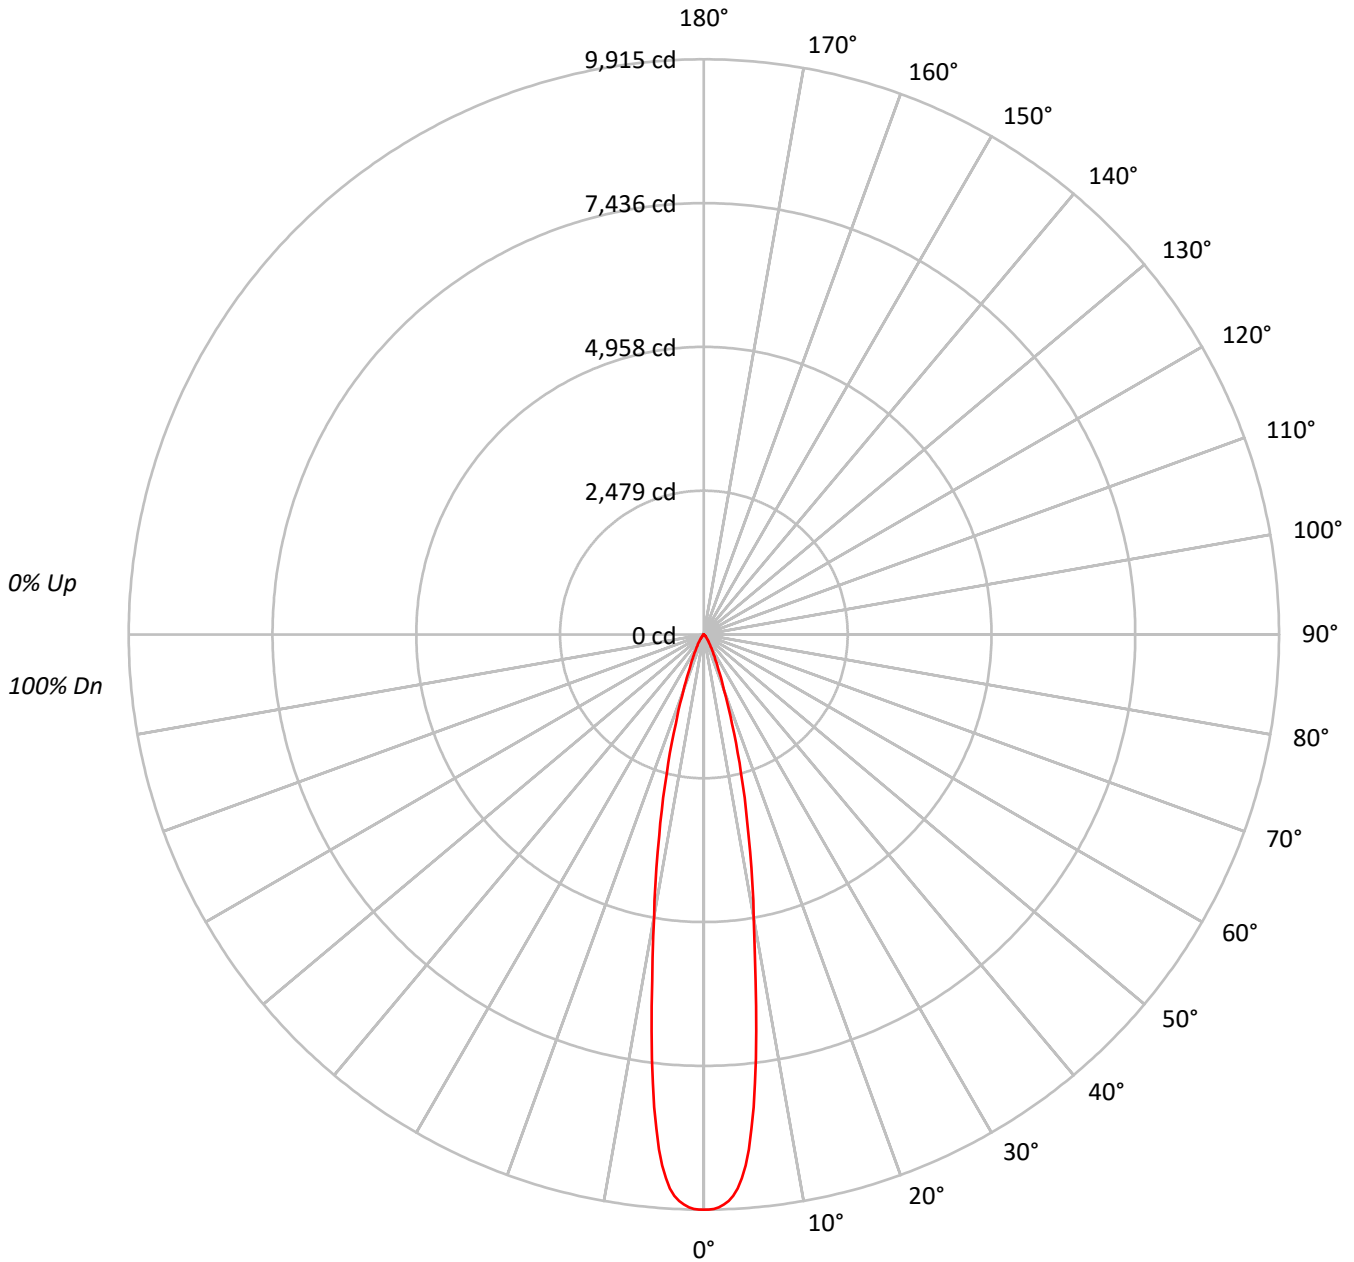



TEST NUMBER: P790095  
 CATALOG NUMBER: LER6D20D010-EC6DR2015309030-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	95	93	92															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1083320
5°	977353
10°	548552
15°	278840
20°	118052
25°	54491
30°	28854
35°	15539
40°	8315
45°	4914
50°	2856
55°	1505
60°	961
65°	672
70°	288
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4914 cd/sqm



TEST NUMBER: P790095

CATALOG NUMBER: LER6D20D010-EC6DR2015309030-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	705.9	40.5
10°-20°	695.1	39.9
20°-30°	227.1	13.0
30°-40°	77.3	4.4
40°-50°	26.0	1.5
50°-60°	7.8	0.4
60°-70°	2.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1628.1	93.5
0°-40°	1705.4	97.9
0°-60°	1739.3	99.8
0°-90°	1742.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1742.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9915	
5°	8911	706
15°	2465	695
25°	452	227
35°	116	77
45°	32	26
55°	8	8
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790095

CATALOG NUMBER: LER6D20D010-EC6DR2015309030-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9915.0
0.5°	9915.0
1°	9902.6
1.5°	9877.9
2°	9832.9
2.5°	9772.9
3°	9688.1
3.5°	9569.8
4°	9394.1
4.5°	9180.4
5°	8911.1
5.5°	8557.1
6°	8194.2
6.5°	7778.4
7°	7371.4
7.5°	6894.6
8°	6469.0
8.5°	6040.8
9°	5645.3
9.5°	5282.4
10°	4944.3
12.5°	3550.2
15°	2465.1
17.5°	1610.4
20°	1015.3
22.5°	657.8
25°	452.0
27.5°	317.8
30°	228.7
32.5°	164.2
35°	116.5
37.5°	81.2
40°	58.3
42.5°	42.4
45°	31.8
47.5°	24.7
50°	16.8
52.5°	10.6
55°	7.9
57.5°	6.2
60°	4.4
62.5°	3.5
65°	2.6



TEST NUMBER: P790095  
CATALOG NUMBER: LER6D20D010-EC6DR2015309030-6LBDP1B

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.8
70°		0.9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)