

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790312

Luminaire Tested: LER6D20D010-EC6DR4020359050-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P790312
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR4020359050-6LB DP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3746.0 lumens
Efficiency: N/A
Efficacy: 162.2 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790312
CATALOG NUMBER: LER6D20D010-EC6DR4020359050-6LBDP1H

Luminous Intensity Polar Plot

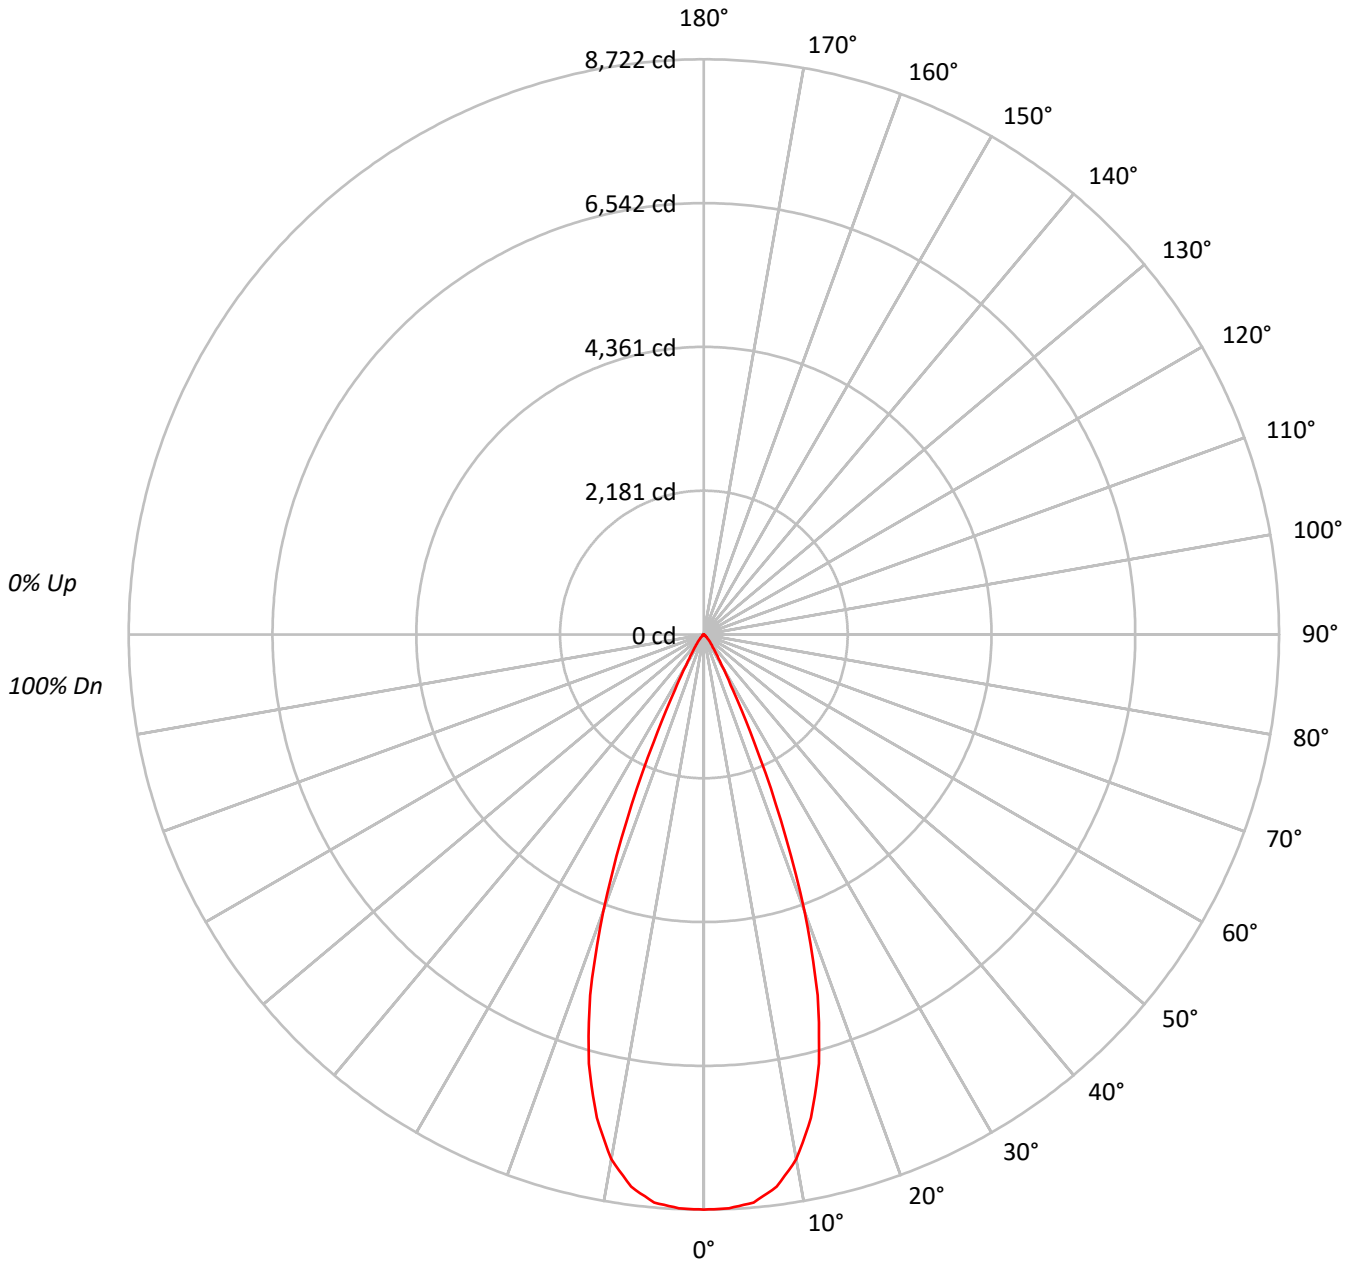



TEST NUMBER: P790312

CATALOG NUMBER: LER6D20D010-EC6DR4020359050-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									50									30									10									0									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100	100																
	1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96	96	96	96	96	96	96	96	96	96	96	96																
	2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92	92	92	92	92	92	92	92	92																
	3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88	88	88	88	88	88	88	88	88	88	88	88																
	4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84	84	84	84	84	84	84	84	84	84	84	84																
	5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81	81	81	81	81	81	81	81	81	81	81	81																
	6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77	77	77	77	77	77	77	77	77	77	77	77																
	7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74	74	74	74	74	74	74	74	74	74	74	74																
	8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72	72	72	72	72	72	72	72	72	72	72	72																
	9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69	69	69	69	69	69	69	69	69	69	69	69																
	10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67	67	67	67	67	67	67	67	67	67	67	67																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	952929
5°	948299
10°	896346
15°	762011
20°	519368
25°	216699
30°	68141
35°	31665
40°	17515
45°	8035
50°	3893
55°	2133
60°	1114
65°	388
70°	160
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8035 cd/sqm



TEST NUMBER: P790312

CATALOG NUMBER: LER6D20D010-EC6DR4020359050-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	807.3	21.6
10°-20°	1808.7	48.3
20°-30°	905.4	24.2
30°-40°	166.0	4.4
40°-50°	45.8	1.2
50°-60°	10.7	0.3
60°-70°	2.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3521.3	94.0
0°-40°	3687.3	98.4
0°-60°	3743.8	99.9
0°-90°	3746.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3746.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8722	
5°	8646	807
15°	6737	1809
25°	1798	905
35°	237	166
45°	52	46
55°	11	11
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790312

CATALOG NUMBER: LER6D20D010-EC6DR4020359050-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	8721.6
2.5°	8708.9
5°	8646.2
7.5°	8446.5
10°	8079.1
12.5°	7506.5
15°	6736.6
17.5°	5735.4
20°	4466.8
22.5°	3045.3
25°	1797.5
27.5°	950.2
30°	540.1
32.5°	349.0
35°	237.4
37.5°	169.7
40°	122.8
42.5°	84.1
45°	52.0
47.5°	33.1
50°	22.9
52.5°	16.3
55°	11.2
57.5°	7.1
60°	5.1
62.5°	3.1
65°	1.5
67.5°	1.0
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)