

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790450

Luminaire Tested: LER6D20D010-EC6DR5520359040-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P790450
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR5520359040-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3399.2 lumens
Efficiency: N/A
Efficacy: 147.1 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790450
CATALOG NUMBER: LER6D20D010-EC6DR5520359040-6LBDP1MW

Luminous Intensity Polar Plot

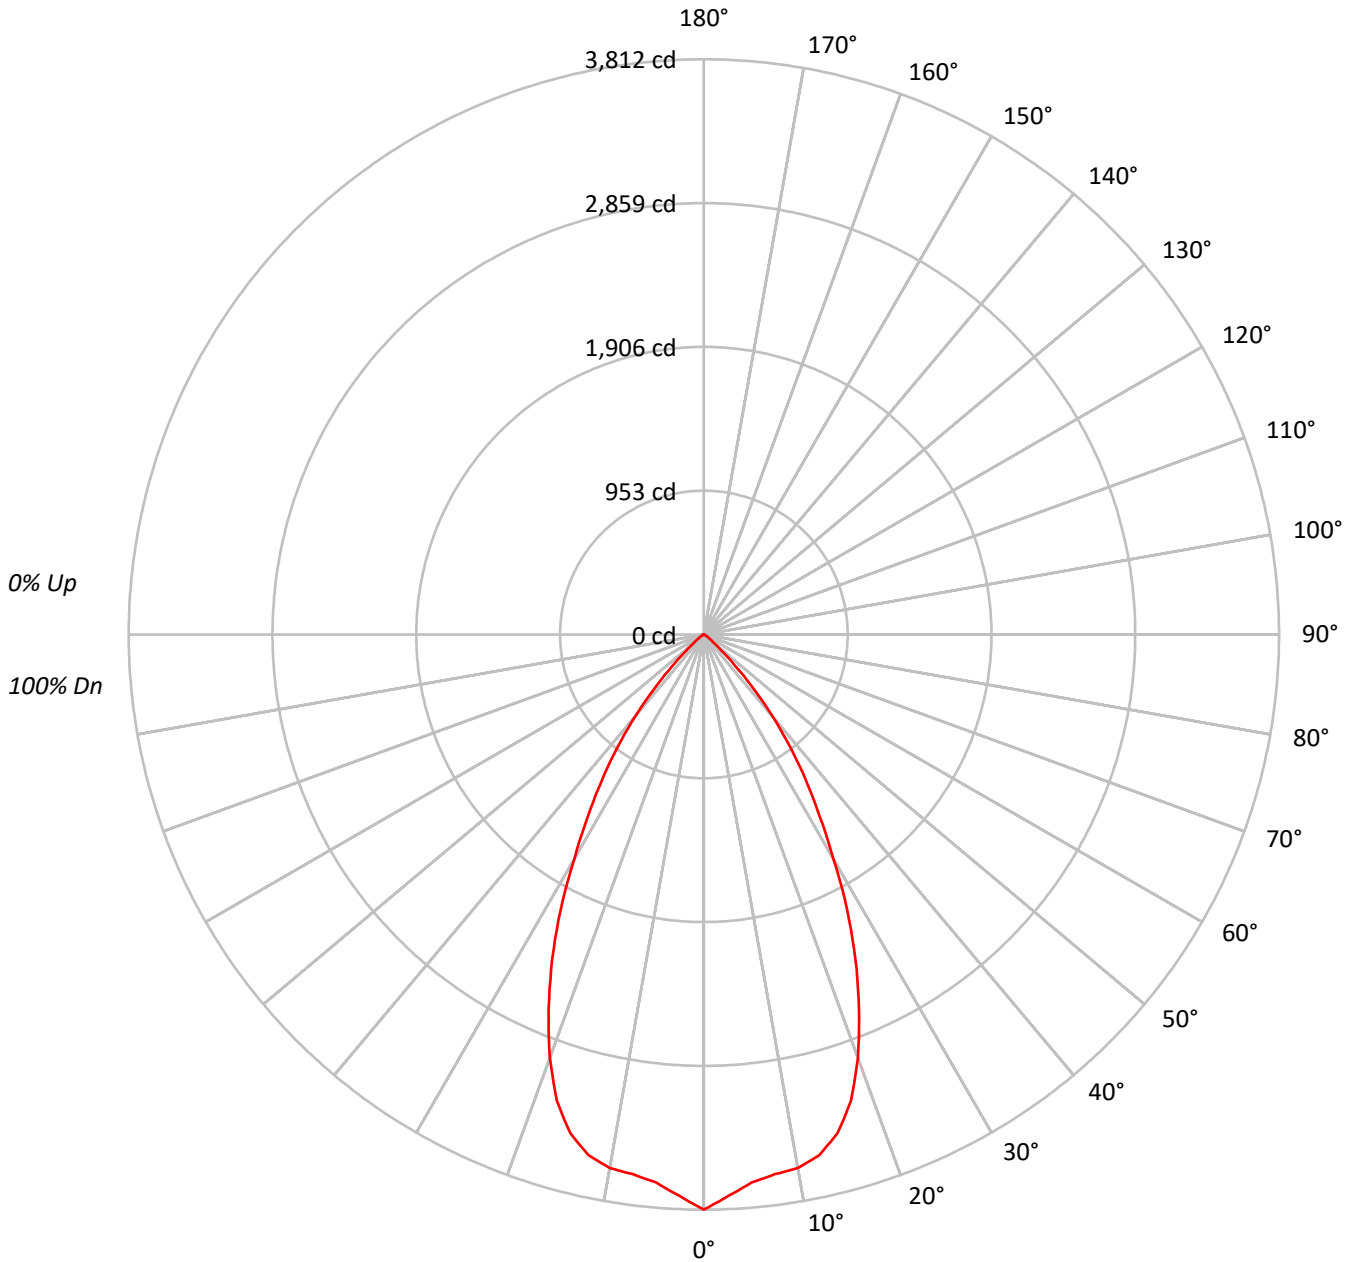



TEST NUMBER: P790450
 CATALOG NUMBER: LER6D20D010-EC6DR5520359040-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94				
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87				
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81				
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75				
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70				
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65				
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61				
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57				
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54				
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50				

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	416458
5°	399919
10°	398408
15°	386967
20°	346970
25°	286754
30°	216610
35°	157058
40°	100511
45°	45907
50°	15009
55°	6477
60°	2797
65°	362
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 45907 cd/sqm



TEST NUMBER: P790450

CATALOG NUMBER: LER6D20D010-EC6DR5520359040-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	347.0	10.2
10°-20°	946.9	27.9
20°-30°	1079.1	31.7
30°-40°	734.6	21.6
40°-50°	253.1	7.4
50°-60°	35.0	1.0
60°-70°	3.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2373.0	69.8
0°-40°	3107.6	91.4
0°-60°	3395.8	99.9
0°-90°	3399.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3399.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3812	
5°	3646	347
15°	3421	947
25°	2379	1079
35°	1178	735
45°	297	253
55°	34	35
65°	1	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790450

CATALOG NUMBER: LER6D20D010-EC6DR5520359040-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3811.6
2.5°	3724.2
5°	3646.3
7.5°	3608.0
10°	3591.0
12.5°	3534.4
15°	3421.0
17.5°	3241.0
20°	2984.1
22.5°	2687.5
25°	2378.6
27.5°	2056.9
30°	1716.9
32.5°	1428.8
35°	1177.5
37.5°	938.5
40°	704.7
42.5°	488.4
45°	297.1
47.5°	160.1
50°	88.3
52.5°	52.4
55°	34.0
57.5°	21.7
60°	12.8
62.5°	5.7
65°	1.4
67.5°	0.5
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)