

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790521

Luminaire Tested: LER6D20D010-EC6DR6520359027-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P790521
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR6520359027-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2982.4 lumens
Efficiency: N/A
Efficacy: 129.1 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790521
CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBDP1LI

Luminous Intensity Polar Plot

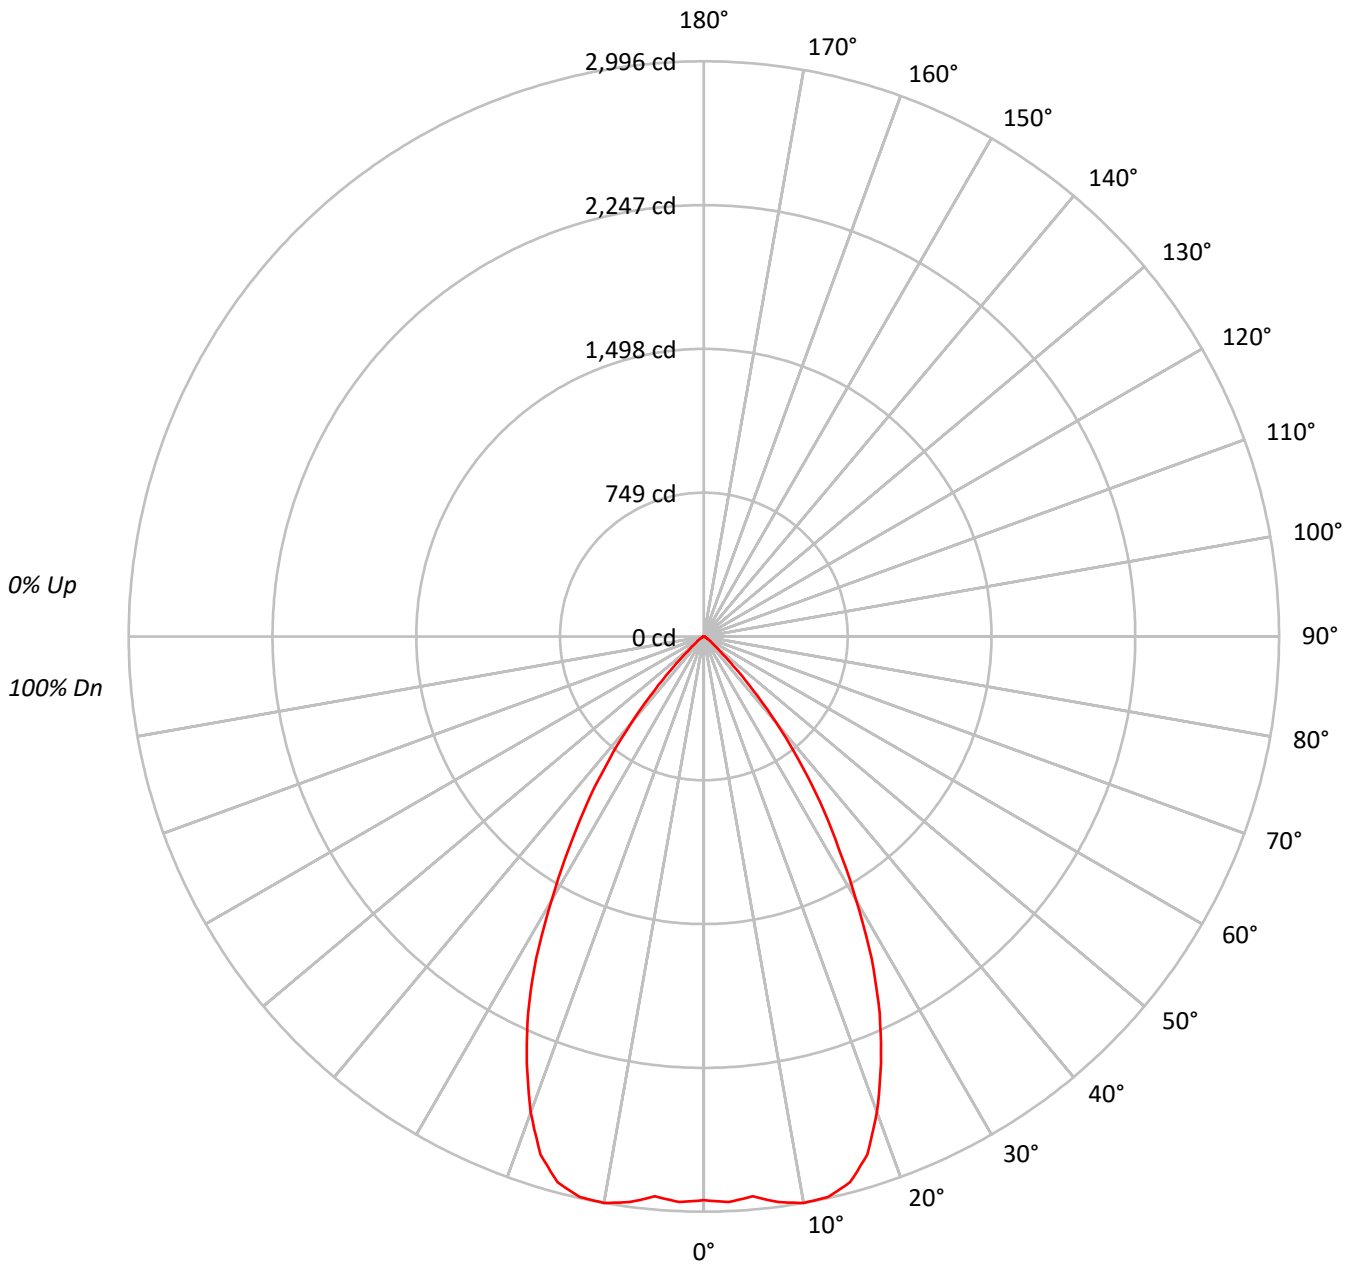



TEST NUMBER: P790521

CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	320833
5°	321094
10°	332406
15°	332954
20°	306542
25°	261184
30°	199944
35°	141266
40°	83381
45°	33855
50°	12273
55°	6839
60°	3912
65°	2146
70°	2268
75°	1773
80°	1825
85°	1630

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 33855 cd/sqm



TEST NUMBER: P790521

CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	282.8	9.5
10°-20°	815.6	27.3
20°-30°	978.6	32.8
30°-40°	657.6	22.0
40°-50°	196.9	6.6
50°-60°	34.8	1.2
60°-70°	9.9	0.3
70°-80°	4.9	0.2
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2076.9	69.6
0°-40°	2734.6	91.7
0°-60°	2966.2	99.5
0°-90°	2982.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2982.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2936	
5°	2928	283
15°	2944	816
25°	2166	979
35°	1059	658
45°	219	197
55°	36	35
65°	8	10
75°	4	5
85°	1	2
90°	0	



TEST NUMBER: P790521

CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2936.4
2.5°	2948.9
5°	2927.6
7.5°	2971.9
10°	2996.1
12.5°	2990.2
15°	2943.5
17.5°	2829.2
20°	2636.4
22.5°	2409.4
25°	2166.5
27.5°	1892.4
30°	1584.8
32.5°	1306.1
35°	1059.1
37.5°	814.9
40°	584.6
42.5°	381.8
45°	219.1
47.5°	116.0
50°	72.2
52.5°	50.1
55°	35.9
57.5°	25.9
60°	17.9
62.5°	11.7
65°	8.3
67.5°	7.5
70°	7.1
72.5°	5.4
75°	4.2
77.5°	3.8
80°	2.9
82.5°	2.1
85°	1.3
87.5°	0.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)