

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790525

Luminaire Tested: LER6D20D010-EC6DR6520359027-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P790525
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR6520359027-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3139.4 lumens
Efficiency: N/A
Efficacy: 135.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790525
CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBS1LI

Luminous Intensity Polar Plot

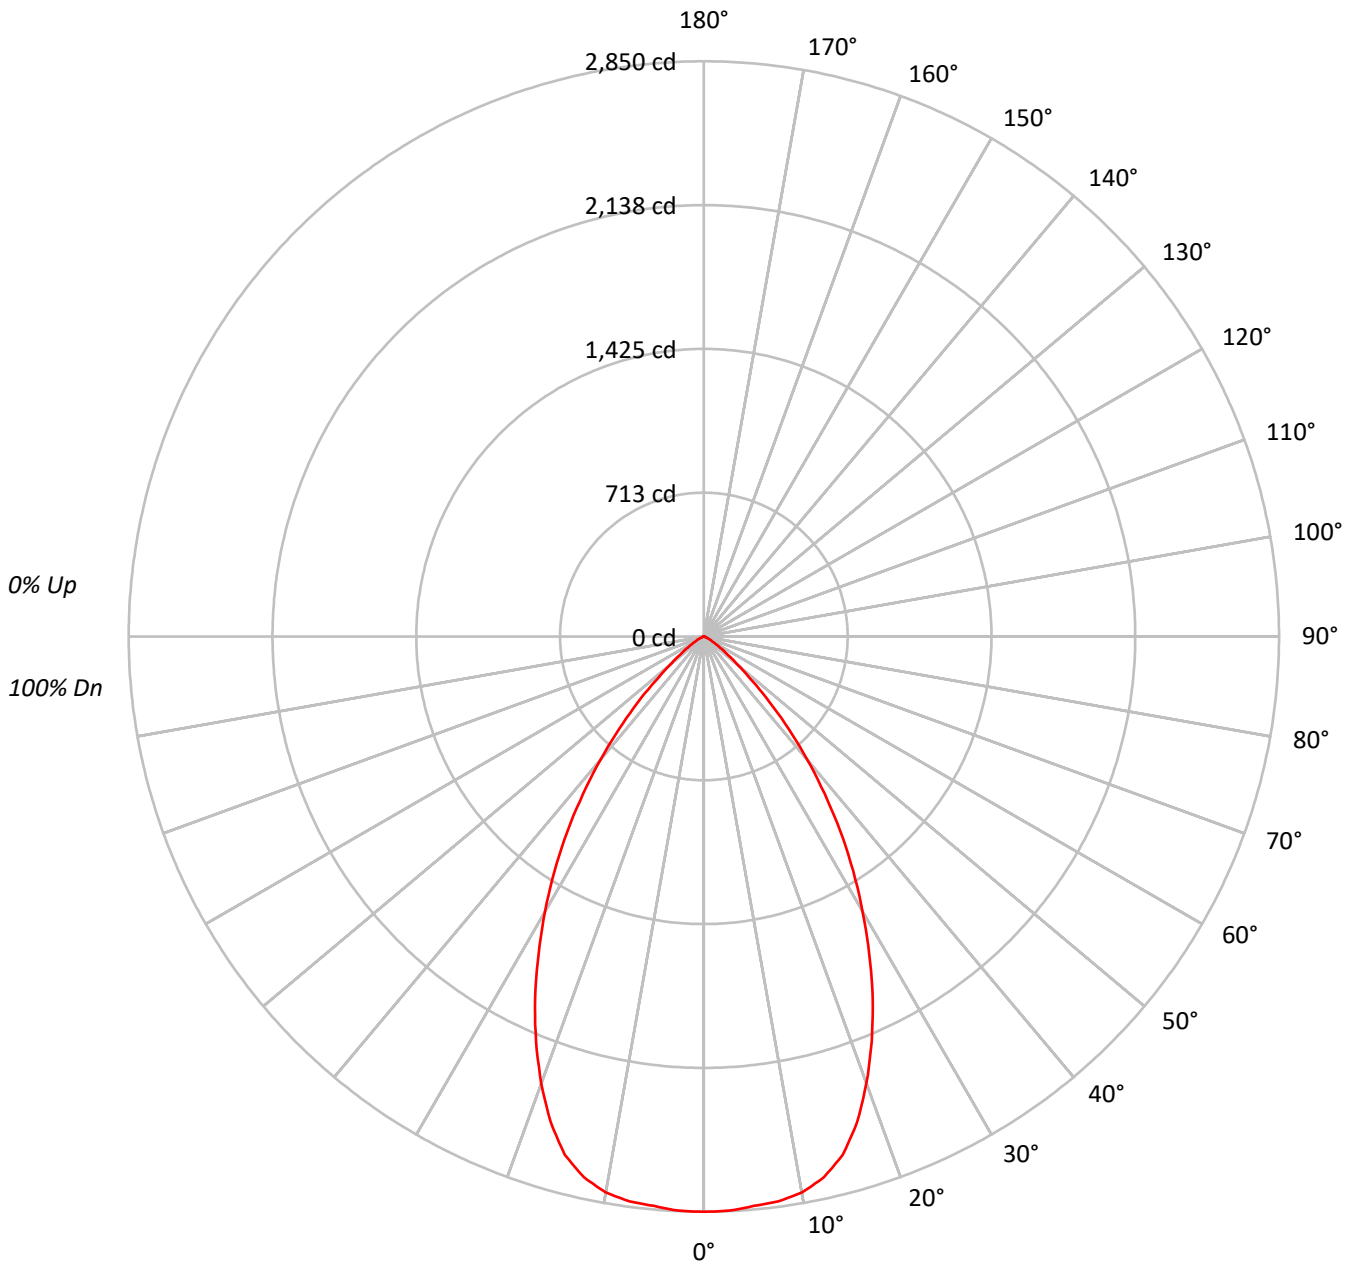



TEST NUMBER: P790525

CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166480
5°	166061
10°	165917
15°	160804
20°	146393
25°	127568
30°	106102
35°	84067
40°	60680
45°	38333
50°	19980
55°	10620
60°	5583
65°	3068
70°	1281
75°	1422
80°	975
85°	871

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 38333 cd/sqm



TEST NUMBER: P790525

CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	269.6	8.6
10°-20°	738.2	23.5
20°-30°	902.3	28.7
30°-40°	732.1	23.3
40°-50°	364.8	11.6
50°-60°	101.8	3.2
60°-70°	23.1	0.7
70°-80°	6.0	0.2
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1910.0	60.8
0°-40°	2642.1	84.2
0°-60°	3108.7	99.0
0°-90°	3139.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3139.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2850	
5°	2832	270
15°	2660	738
25°	1980	902
35°	1179	732
45°	464	365
55°	104	102
65°	22	23
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P790525

CATALOG NUMBER: LER6D20D010-EC6DR6520359027-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2850.5
2.5°	2848.4
5°	2832.5
7.5°	2823.3
10°	2797.7
12.5°	2745.8
15°	2659.5
17.5°	2524.6
20°	2355.4
22.5°	2172.7
25°	1979.6
27.5°	1773.1
30°	1573.3
32.5°	1376.0
35°	1179.1
37.5°	982.7
40°	795.9
42.5°	620.8
45°	464.1
47.5°	323.4
50°	219.9
52.5°	151.6
55°	104.3
57.5°	70.4
60°	47.8
62.5°	33.1
65°	22.2
67.5°	11.3
70°	7.5
72.5°	7.1
75°	6.3
77.5°	4.2
80°	2.9
82.5°	2.1
85°	1.3
87.5°	0.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)