

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790531

Luminaire Tested: LER6D20D010-EC6DR6520359030-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P790531
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR6520359030-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2866.4 lumens
Efficiency: N/A
Efficacy: 124.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790531
CATALOG NUMBER: LER6D20D010-EC6DR6520359030-6LBS1B

Luminous Intensity Polar Plot

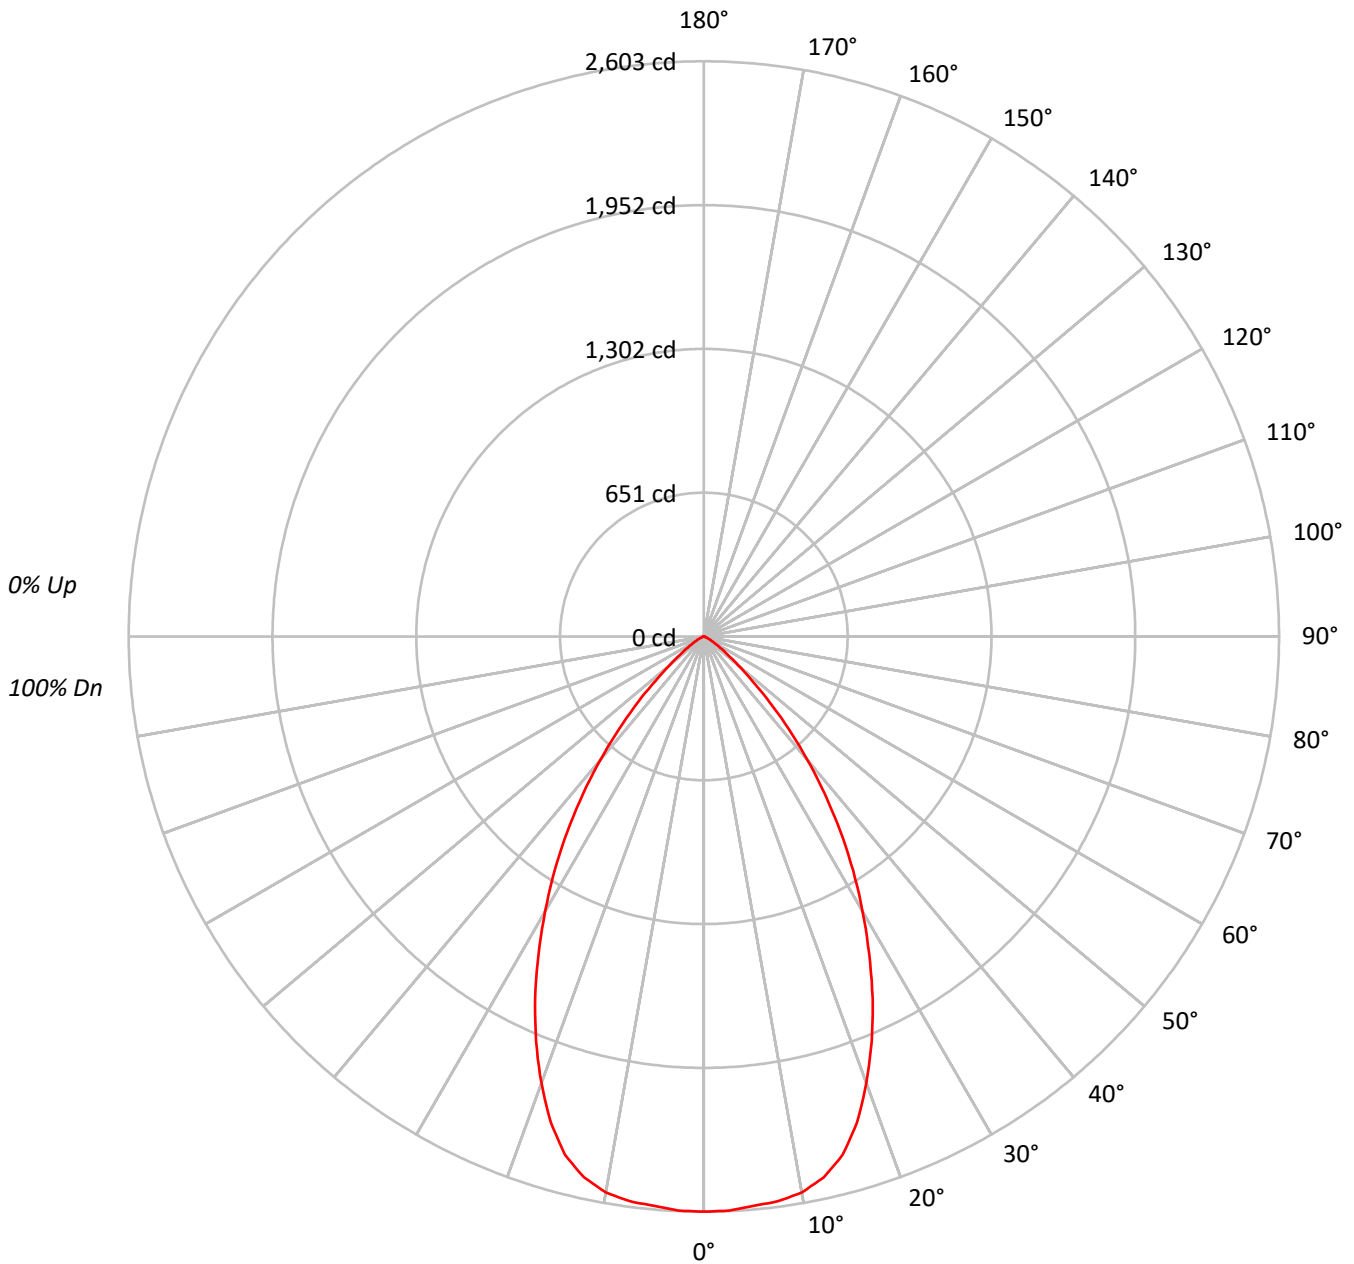



TEST NUMBER: P790531

CATALOG NUMBER: LER6D20D010-EC6DR6520359030-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	152002
5°	151621
10°	151488
15°	146819
20°	133658
25°	116478
30°	96876
35°	76759
40°	55404
45°	35004
50°	18245
55°	9694
60°	5093
65°	2805
70°	1178
75°	1286
80°	908
85°	737

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 35004 cd/sqm



TEST NUMBER: P790531

CATALOG NUMBER: LER6D20D010-EC6DR6520359030-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	246.1	8.6
10°-20°	674.0	23.5
20°-30°	823.8	28.7
30°-40°	668.4	23.3
40°-50°	333.1	11.6
50°-60°	92.9	3.2
60°-70°	21.1	0.7
70°-80°	5.5	0.2
80°-90°	1.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1743.9	60.8
0°-40°	2412.4	84.2
0°-60°	2838.4	99.0
0°-90°	2866.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2866.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2603	
5°	2586	246
15°	2428	674
25°	1808	824
35°	1077	668
45°	424	333
55°	95	93
65°	20	21
75°	6	5
85°	1	1
90°	0	



TEST NUMBER: P790531
CATALOG NUMBER: LER6D20D010-EC6DR6520359030-6LBS1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	2602.6
2.5°	2600.7
5°	2586.2
7.5°	2577.7
10°	2554.4
12.5°	2507.0
15°	2428.2
17.5°	2305.1
20°	2150.5
22.5°	1983.8
25°	1807.5
27.5°	1618.9
30°	1436.5
32.5°	1256.4
35°	1076.6
37.5°	897.2
40°	726.7
42.5°	566.8
45°	423.8
47.5°	295.3
50°	200.8
52.5°	138.4
55°	95.2
57.5°	64.3
60°	43.6
62.5°	30.2
65°	20.3
67.5°	10.3
70°	6.9
72.5°	6.5
75°	5.7
77.5°	3.8
80°	2.7
82.5°	1.9
85°	1.1
87.5°	0.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)