

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790538

Luminaire Tested: LER6D20D010-EC6DR6520359035-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P790538
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR6520359035-6LBDDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2671.4 lumens
Efficiency: N/A
Efficacy: 115.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790538
CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBDP1MW

Luminous Intensity Polar Plot

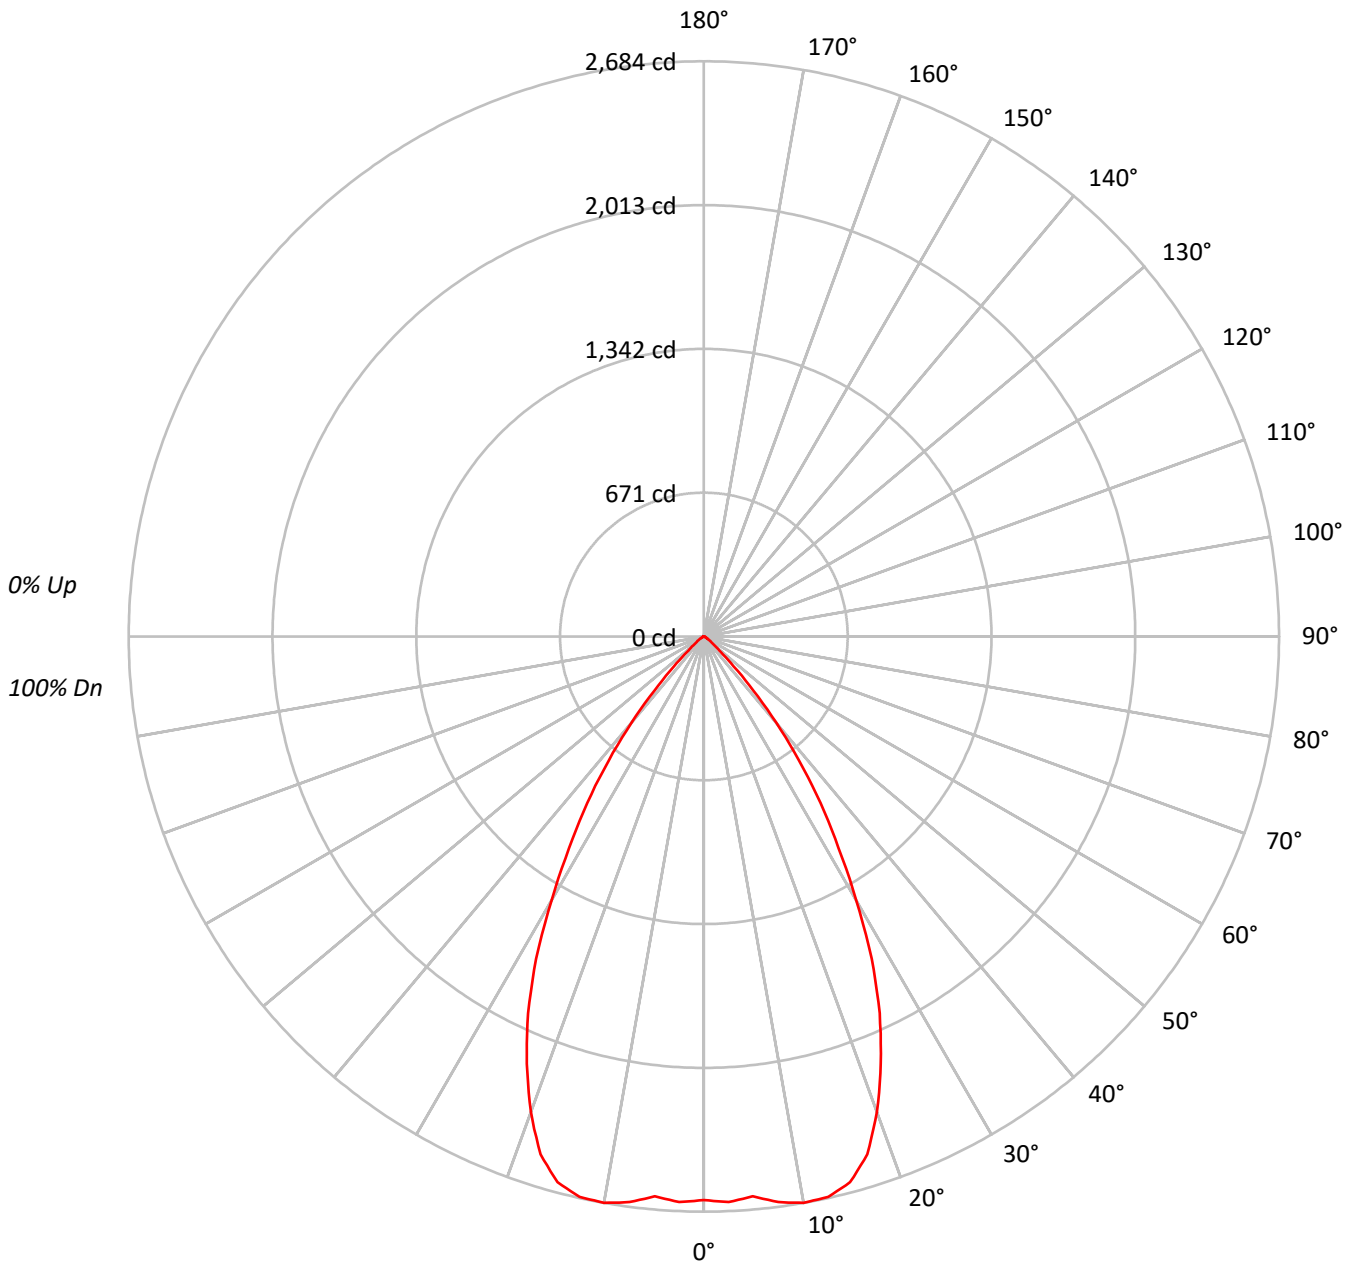



TEST NUMBER: P790538

CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	287367
5°	287609
10°	297735
15°	298228
20°	274567
25°	233939
30°	179089
35°	126527
40°	74681
45°	30316
50°	10998
55°	6115
60°	3518
65°	1939
70°	2045
75°	1562
80°	1636
85°	1379

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30316 cd/sqm



TEST NUMBER: P790538

CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	253.3	9.5
10°-20°	730.5	27.3
20°-30°	876.5	32.8
30°-40°	589.0	22.0
40°-50°	176.3	6.6
50°-60°	31.1	1.2
60°-70°	8.9	0.3
70°-80°	4.4	0.2
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1860.3	69.6
0°-40°	2449.3	91.7
0°-60°	2656.8	99.5
0°-90°	2671.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2671.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2630	
5°	2622	253
15°	2636	731
25°	1940	877
35°	949	589
45°	196	176
55°	32	31
65°	8	9
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P790538

CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2630.1
2.5°	2641.3
5°	2622.3
7.5°	2661.9
10°	2683.6
12.5°	2678.3
15°	2636.5
17.5°	2534.1
20°	2361.4
22.5°	2158.1
25°	1940.5
27.5°	1695.0
30°	1419.5
32.5°	1169.9
35°	948.6
37.5°	729.9
40°	523.6
42.5°	342.0
45°	196.2
47.5°	103.9
50°	64.7
52.5°	44.9
55°	32.1
57.5°	23.2
60°	16.1
62.5°	10.5
65°	7.5
67.5°	6.7
70°	6.4
72.5°	4.9
75°	3.7
77.5°	3.4
80°	2.6
82.5°	1.9
85°	1.1
87.5°	0.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)