

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790539

Luminaire Tested: LER6D20D010-EC6DR6520359035-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P790539  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D20D010-EC6DR6520359035-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3026.0 lumens  
Efficiency: N/A  
Efficacy: 131.0 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 23.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P790539  
CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBS1B

### Luminous Intensity Polar Plot

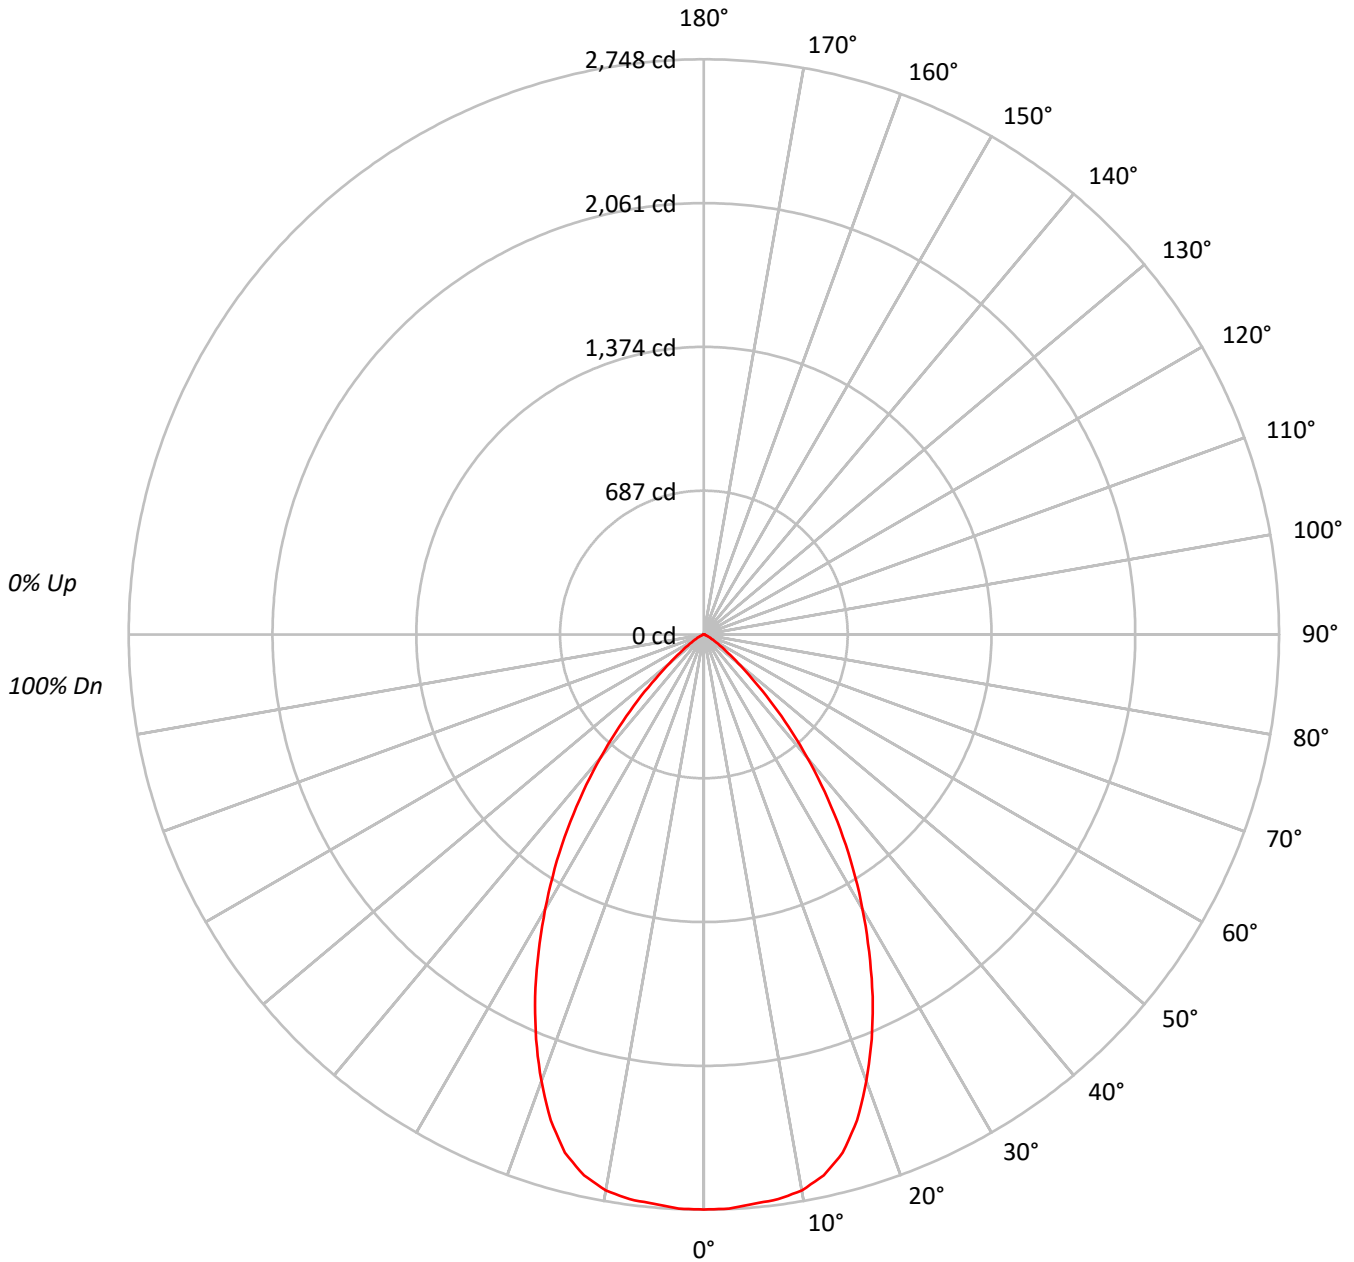



TEST NUMBER: P790539

CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	160465
5°	160057
10°	159921
15°	154994
20°	141104
25°	122961
30°	102271
35°	81030
40°	58484
45°	36953
50°	19262
55°	10233
60°	5373
65°	2957
70°	1247
75°	1376
80°	942
85°	804

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 36953 cd/sqm



TEST NUMBER: P790539

CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	259.8	8.6
10°-20°	711.5	23.5
20°-30°	869.7	28.7
30°-40°	705.6	23.3
40°-50°	351.7	11.6
50°-60°	98.1	3.2
60°-70°	22.3	0.7
70°-80°	5.8	0.2
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1841.0	60.8
0°-40°	2546.7	84.2
0°-60°	2996.4	99.0
0°-90°	3026.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3026.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2748	
5°	2730	260
15°	2563	712
25°	1908	870
35°	1136	706
45°	447	352
55°	100	98
65°	21	22
75°	6	6
85°	1	1
90°	0	



TEST NUMBER: P790539

CATALOG NUMBER: LER6D20D010-EC6DR6520359035-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2747.5
2.5°	2745.5
5°	2730.1
7.5°	2721.3
10°	2696.6
12.5°	2646.6
15°	2563.4
17.5°	2433.4
20°	2270.3
22.5°	2094.2
25°	1908.1
27.5°	1709.1
30°	1516.5
32.5°	1326.3
35°	1136.5
37.5°	947.2
40°	767.1
42.5°	598.4
45°	447.4
47.5°	311.7
50°	212.0
52.5°	146.2
55°	100.5
57.5°	67.8
60°	46.0
62.5°	31.9
65°	21.4
67.5°	10.9
70°	7.3
72.5°	6.9
75°	6.1
77.5°	4.0
80°	2.8
82.5°	2.0
85°	1.2
87.5°	0.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)