

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790569

Luminaire Tested: LER6D20D010-EC6DR7020359027-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P790569
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D20D010-EC6DR7020359027-6LBDDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3435.7 lumens
Efficiency: N/A
Efficacy: 148.7 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790569
CATALOG NUMBER: LER6D20D010-EC6DR7020359027-6LBDP1LI

Luminous Intensity Polar Plot

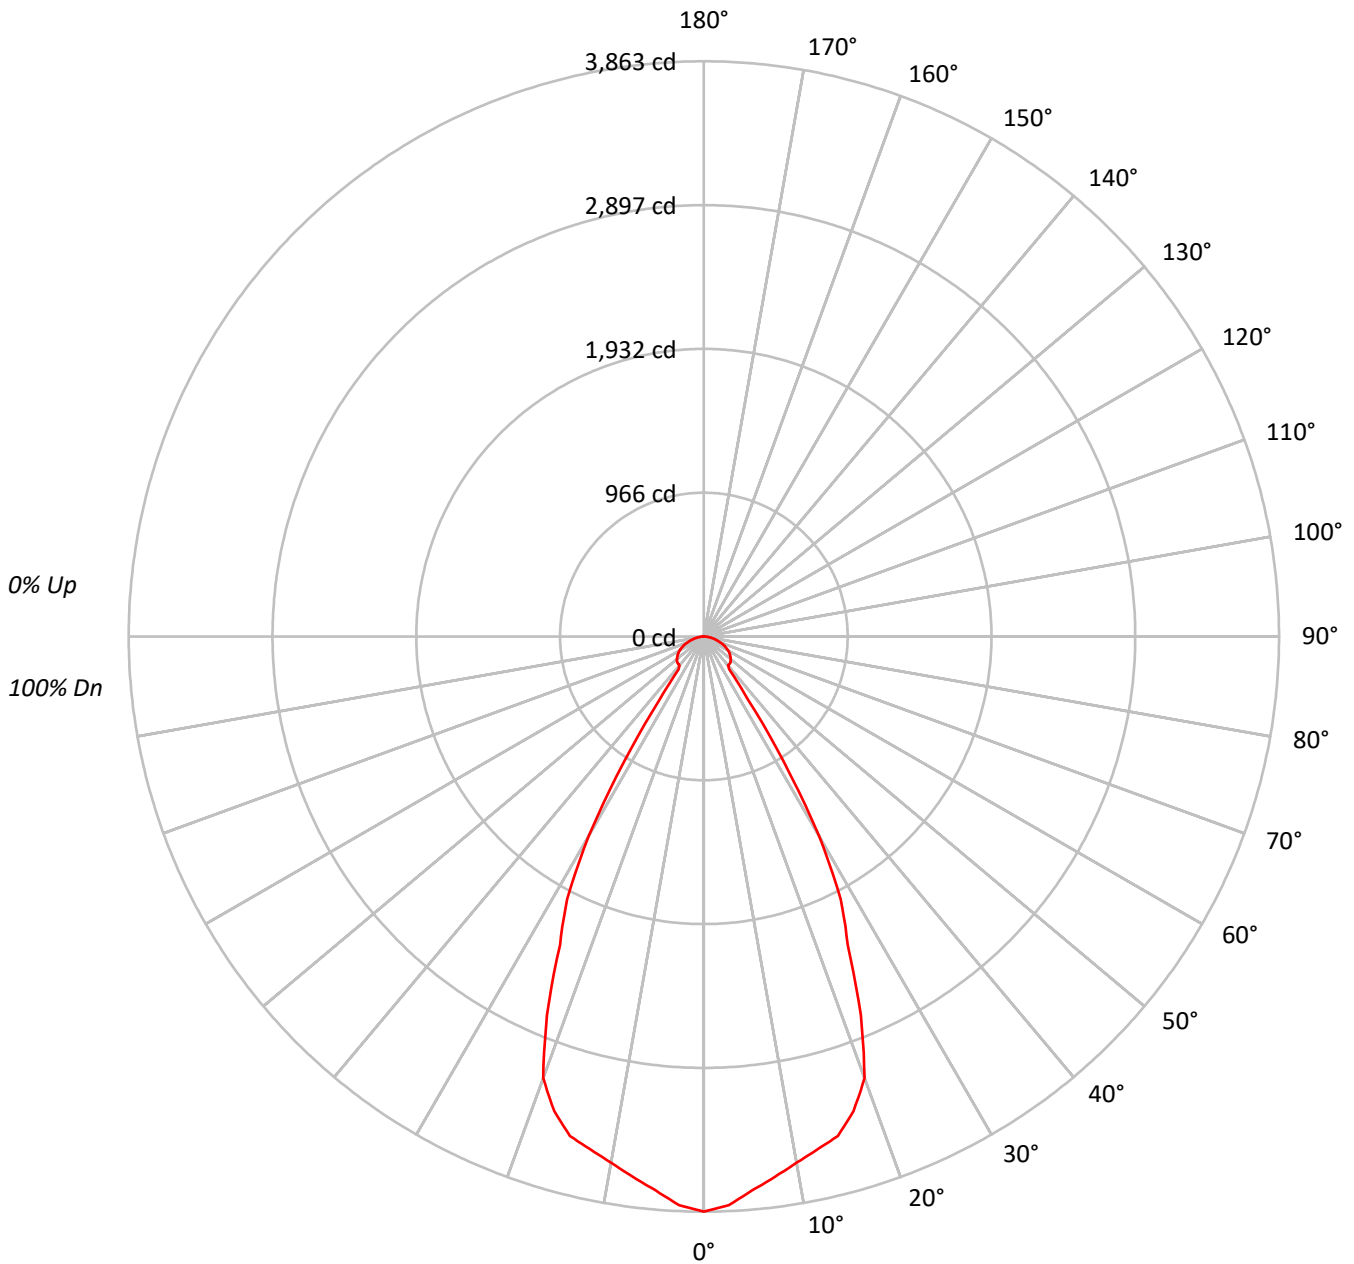



TEST NUMBER: P790569
 CATALOG NUMBER: LER6D20D010-EC6DR7020359027-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	422042
5°	409494
10°	398086
15°	392860
20°	366853
25°	275591
30°	194822
35°	69012
40°	36285
45°	38645
50°	40030
55°	40765
60°	41038
65°	40150
70°	37888
75°	35123
80°	31146
85°	25323

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 60°
 Luminance: 41038 cd/sqm



TEST NUMBER: P790569

CATALOG NUMBER: LER6D20D010-EC6DR7020359027-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	352.2	10.3
10°-20°	966.0	28.1
20°-30°	1063.9	31.0
30°-40°	406.5	11.8
40°-50°	191.9	5.6
50°-60°	190.8	5.6
60°-70°	152.8	4.4
70°-80°	87.8	2.6
80°-90°	23.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2382.0	69.3
0°-40°	2788.5	81.2
0°-60°	3171.2	92.3
0°-90°	3435.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3435.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3863	
5°	3734	352
15°	3473	966
25°	2286	1064
35°	517	406
45°	250	192
55°	214	191
65°	155	153
75°	83	88
85°	20	24
90°	0	



TEST NUMBER: P790569

CATALOG NUMBER: LER6D20D010-EC6DR7020359027-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3862.7
2.5°	3822.3
5°	3733.6
7.5°	3659.6
10°	3588.1
12.5°	3527.5
15°	3473.1
17.5°	3341.6
20°	3155.1
22.5°	2752.7
25°	2286.0
27.5°	1990.0
30°	1544.2
32.5°	997.5
35°	517.4
37.5°	279.5
40°	254.4
42.5°	252.6
45°	250.1
47.5°	244.6
50°	235.5
52.5°	225.1
55°	214.0
57.5°	201.8
60°	187.8
62.5°	171.9
65°	155.3
67.5°	137.0
70°	118.6
72.5°	100.3
75°	83.2
77.5°	65.4
80°	49.5
82.5°	34.9
85°	20.2
87.5°	8.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)