

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790831

Luminaire Tested: LER6D25D010-EC6DR3520359040-6LBDP1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P790831  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D25D010-EC6DR3520359040-6LBDDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4438.9 lumens  
Efficiency: N/A  
Efficacy: 176.8 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P790831  
CATALOG NUMBER: LER6D25D010-EC6DR3520359040-6LBDP1B

### Luminous Intensity Polar Plot

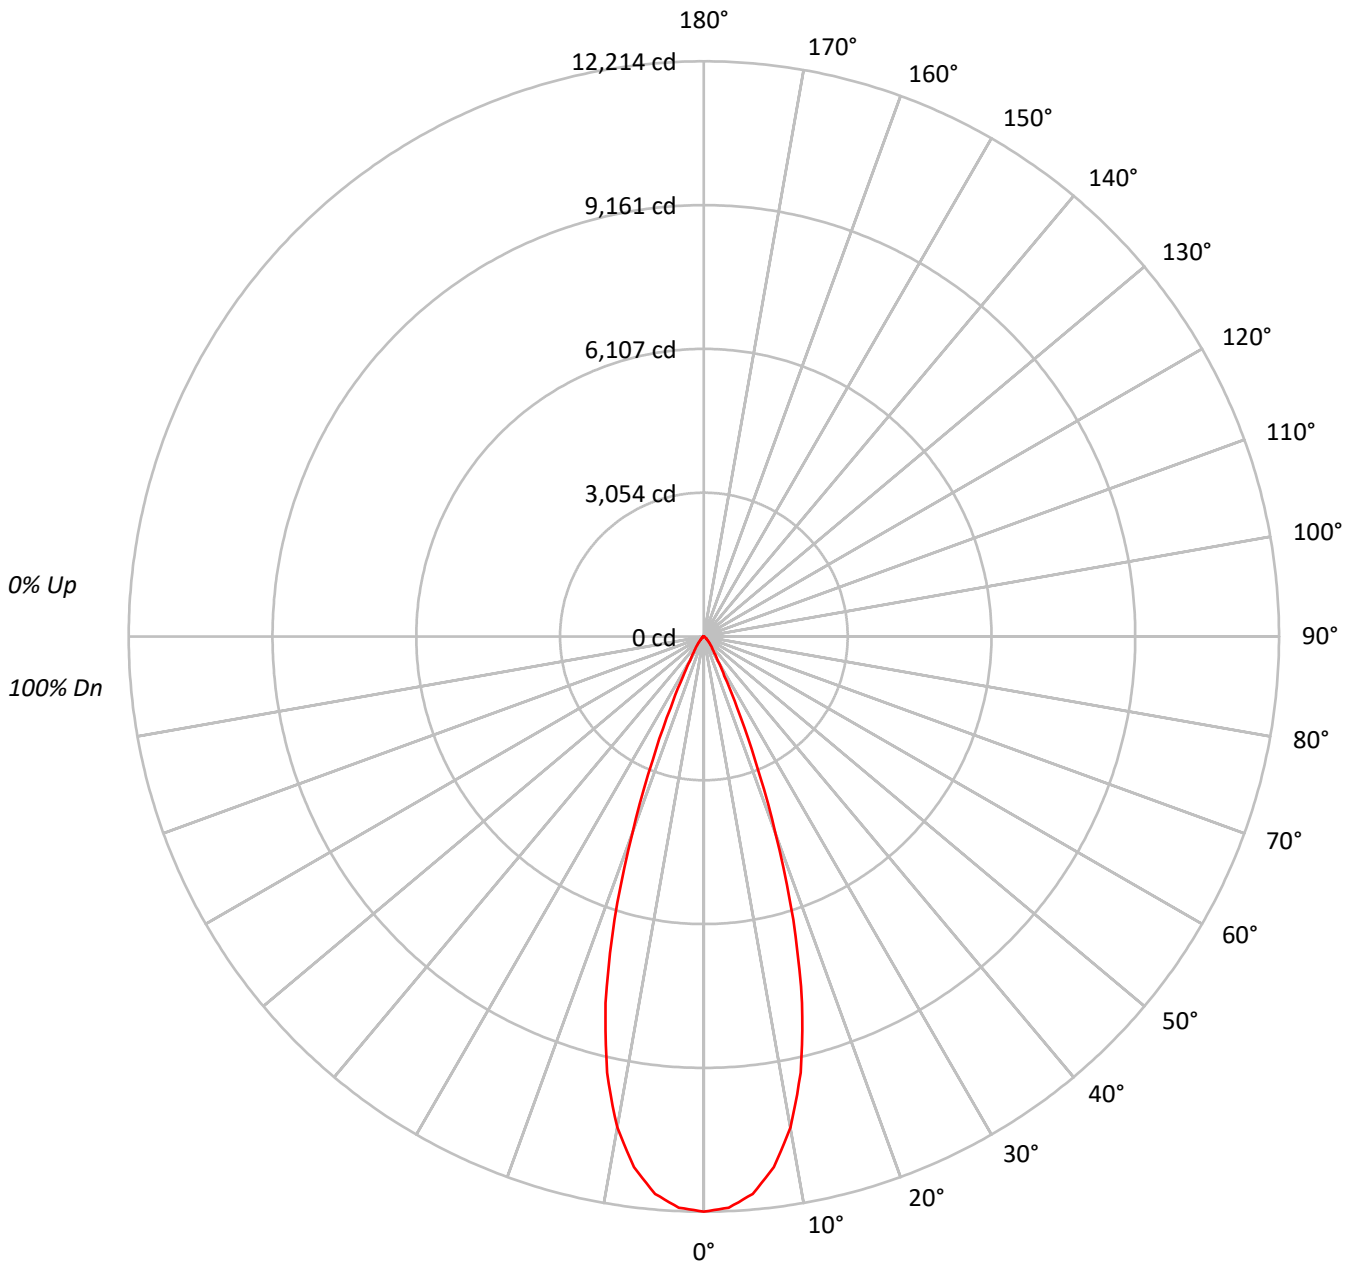



TEST NUMBER: P790831

CATALOG NUMBER: LER6D25D010-EC6DR3520359040-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						96													
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						92													
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88						88													
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						84													
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						81													
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						78													
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						75													
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						72													
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						70													
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						68													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1334467
5°	1303108
10°	1174444
15°	911560
20°	517019
25°	201148
30°	75042
35°	41135
40°	26886
45°	16363
50°	10420
55°	7353
60°	5376
65°	2921
70°	224
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16363 cd/sqm



TEST NUMBER: P790831

CATALOG NUMBER: LER6D25D010-EC6DR3520359040-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1092.7	24.6
10°-20°	2133.5	48.1
20°-30°	870.1	19.6
30°-40°	208.2	4.7
40°-50°	86.8	2.0
50°-60°	35.9	0.8
60°-70°	11.2	0.3
70°-80°	0.3	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4096.3	92.3
0°-40°	4304.5	97.0
0°-60°	4427.2	99.7
0°-90°	4438.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4438.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12214	
5°	11881	###
15°	8059	2133
25°	1668	870
35°	308	208
45°	106	87
55°	39	36
65°	11	11
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790831

CATALOG NUMBER: LER6D25D010-EC6DR3520359040-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	12213.6
2.5°	12140.3
5°	11881.2
7.5°	11364.4
10°	10585.7
12.5°	9489.4
15°	8058.7
17.5°	6308.9
20°	4446.6
22.5°	2835.4
25°	1668.5
27.5°	943.1
30°	594.8
32.5°	417.6
35°	308.4
37.5°	238.5
40°	188.5
42.5°	145.2
45°	105.9
47.5°	79.3
50°	61.3
52.5°	48.6
55°	38.6
57.5°	31.3
60°	24.6
62.5°	18.0
65°	11.3
67.5°	4.0
70°	0.7
72.5°	0.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.7
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)