

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790861

Luminaire Tested: LER6D25D010-EC6DR4020359027-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P790861  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D25D010-EC6DR4020359027-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5530.2 lumens  
Efficiency: N/A  
Efficacy: 220.3 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P790861  
CATALOG NUMBER: LER6D25D010-EC6DR4020359027-6LBS1LI

### Luminous Intensity Polar Plot

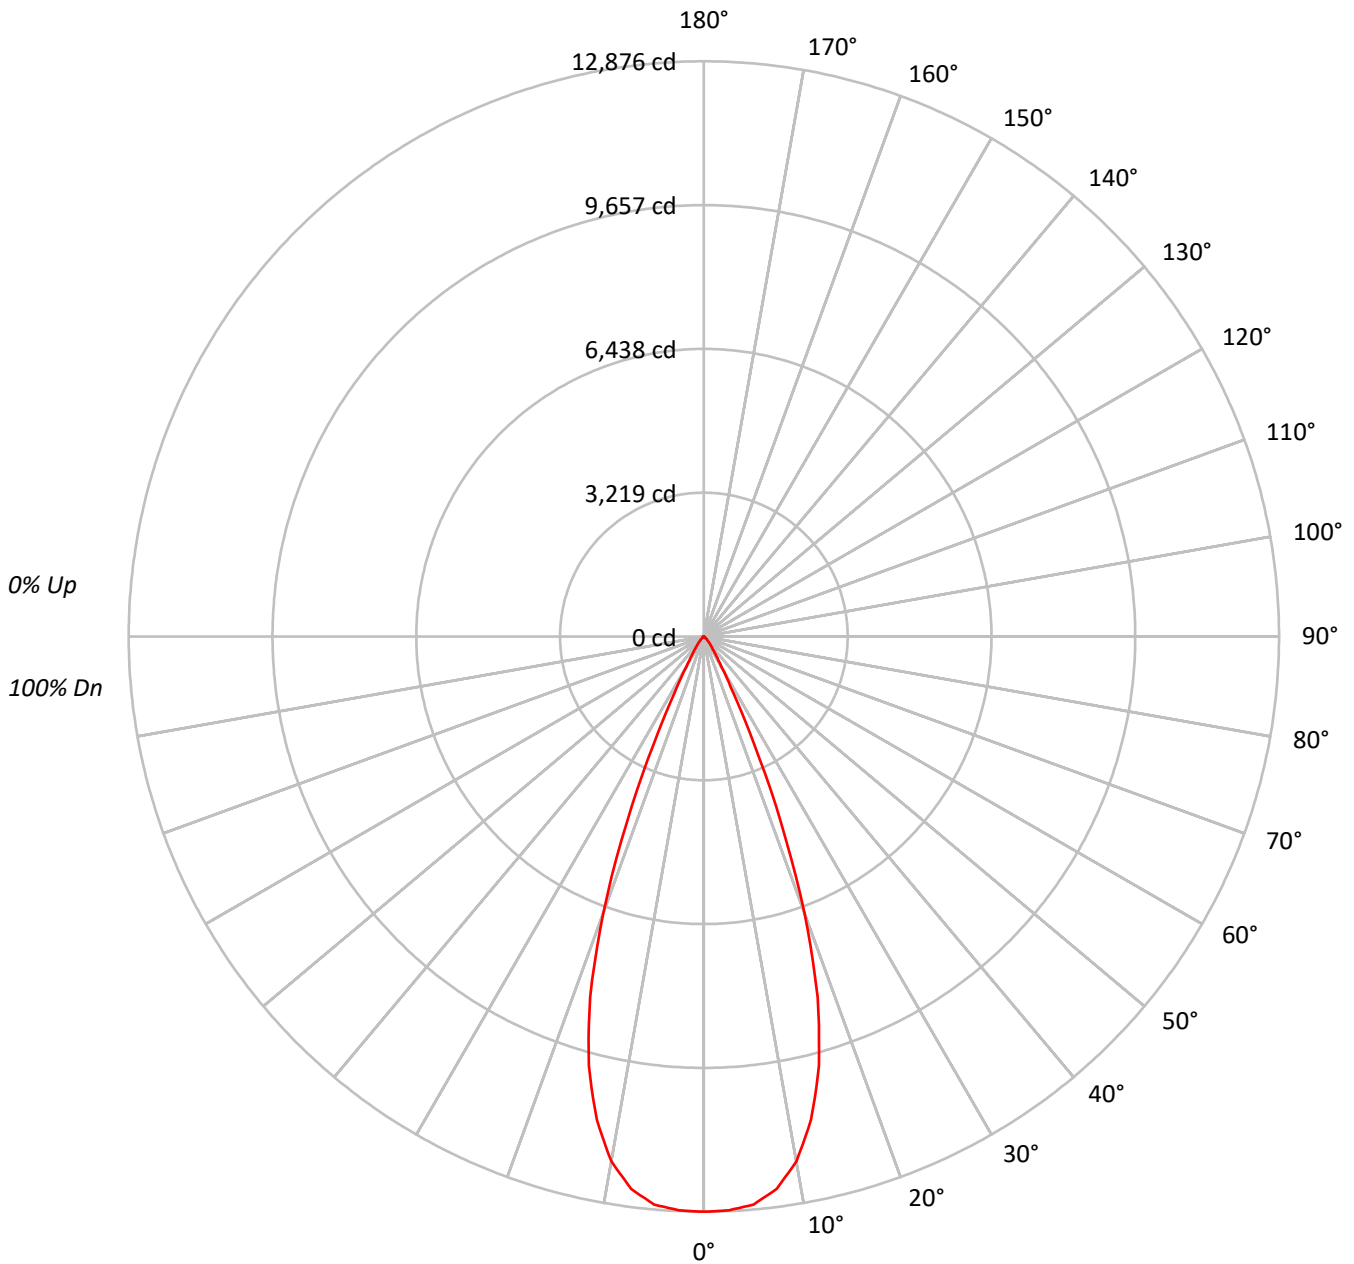



TEST NUMBER: P790861

CATALOG NUMBER: LER6D25D010-EC6DR4020359027-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1   | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 | 103 | 101 | 100 | 99  | 98  | 97  | 96  |
| 2   | 110 | 106 | 103 | 100 | 108 | 105 | 102 | 99  | 102 | 99  | 97  | 99  | 97  | 95  | 96  | 95  | 93  | 92  |
| 3   | 106 | 101 | 97  | 94  | 104 | 100 | 96  | 93  | 97  | 94  | 92  | 95  | 93  | 90  | 93  | 91  | 89  | 88  |
| 4   | 102 | 97  | 92  | 89  | 101 | 95  | 91  | 88  | 93  | 90  | 87  | 92  | 89  | 86  | 90  | 87  | 85  | 84  |
| 5   | 99  | 92  | 88  | 84  | 97  | 91  | 87  | 84  | 90  | 86  | 83  | 88  | 85  | 83  | 87  | 84  | 82  | 81  |
| 6   | 95  | 88  | 84  | 80  | 94  | 88  | 83  | 80  | 86  | 82  | 80  | 85  | 82  | 79  | 84  | 81  | 79  | 77  |
| 7   | 92  | 85  | 80  | 77  | 91  | 84  | 80  | 77  | 83  | 79  | 76  | 82  | 79  | 76  | 81  | 78  | 76  | 74  |
| 8   | 89  | 82  | 77  | 74  | 88  | 81  | 77  | 74  | 80  | 76  | 73  | 79  | 76  | 73  | 78  | 75  | 73  | 72  |
| 9   | 86  | 79  | 74  | 71  | 85  | 78  | 74  | 71  | 77  | 73  | 71  | 76  | 73  | 70  | 76  | 72  | 70  | 69  |
| 10  | 83  | 76  | 71  | 68  | 82  | 75  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 68  | 73  | 70  | 68  | 67  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1406820 |
| 5°  | 1399986 |
| 10° | 1323290 |
| 15° | 1124963 |
| 20° | 766750  |
| 25° | 319919  |
| 30° | 100590  |
| 35° | 46751   |
| 40° | 25859   |
| 45° | 11852   |
| 50° | 5745    |
| 55° | 3143    |
| 60° | 1639    |
| 65° | 595     |
| 70° | 256     |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11852 cd/sqm



TEST NUMBER: P790861

CATALOG NUMBER: LER6D25D010-EC6DR4020359027-6LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1191.9 | 21.6      |
| 10°-20°   | 2670.1 | 48.3      |
| 20°-30°   | 1336.6 | 24.2      |
| 30°-40°   | 245.0  | 4.4       |
| 40°-50°   | 67.6   | 1.2       |
| 50°-60°   | 15.9   | 0.3       |
| 60°-70°   | 3.0    | 0.1       |
| 70°-80°   | 0.1    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 5198.6 | 94.0      |
| 0°-40°    | 5443.6 | 98.4      |
| 0°-60°    | 5527.1 | 99.9      |
| 0°-90°    | 5530.2 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 5530.2 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 12876 |      |
| 5°  | 12764 | ###  |
| 15° | 9945  | 2670 |
| 25° | 2654  | 1337 |
| 35° | 350   | 245  |
| 45° | 77    | 68   |
| 55° | 16    | 16   |
| 65° | 2     | 3    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P790861

CATALOG NUMBER: LER6D25D010-EC6DR4020359027-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

| 0°    |         |
|-------|---------|
| 0°    | 12875.8 |
| 2.5°  | 12857.0 |
| 5°    | 12764.5 |
| 7.5°  | 12469.6 |
| 10°   | 11927.3 |
| 12.5° | 11081.9 |
| 15°   | 9945.3  |
| 17.5° | 8467.3  |
| 20°   | 6594.4  |
| 22.5° | 4495.8  |
| 25°   | 2653.7  |
| 27.5° | 1402.8  |
| 30°   | 797.3   |
| 32.5° | 515.2   |
| 35°   | 350.5   |
| 37.5° | 250.5   |
| 40°   | 181.3   |
| 42.5° | 124.1   |
| 45°   | 76.7    |
| 47.5° | 48.9    |
| 50°   | 33.8    |
| 52.5° | 24.1    |
| 55°   | 16.5    |
| 57.5° | 10.5    |
| 60°   | 7.5     |
| 62.5° | 4.5     |
| 65°   | 2.3     |
| 67.5° | 1.5     |
| 70°   | 0.8     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)