

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P790930

Luminaire Tested: LER6D25D010-EC6DR4520359040-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P790930
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D25D010-EC6DR4520359040-6LBDDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5203.9 lumens
Efficiency: N/A
Efficacy: 207.3 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P790930
CATALOG NUMBER: LER6D25D010-EC6DR4520359040-6LBDP1MW

Luminous Intensity Polar Plot

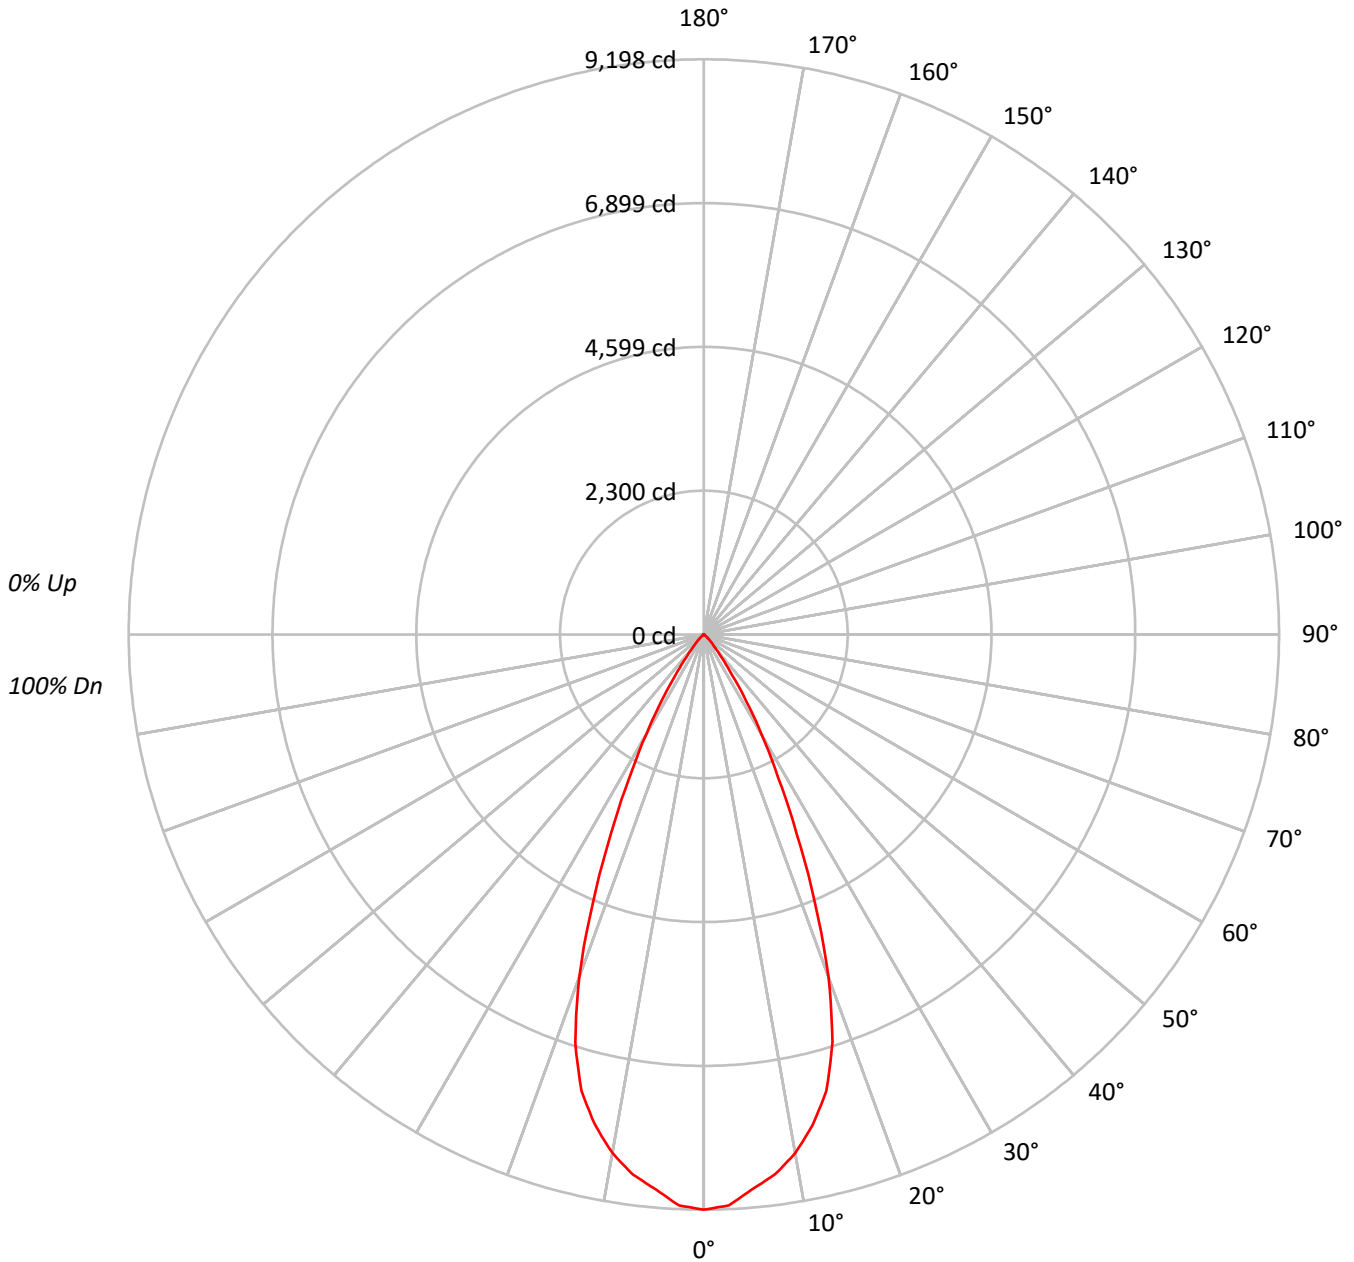



TEST NUMBER: P790930

CATALOG NUMBER: LER6D25D010-EC6DR4520359040-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100														
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95					95														
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90					90														
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85					85														
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81					81														
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77					77														
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73					73														
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69					69														
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66					66														
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63					63														
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60					60														

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1004969
5°	976355
10°	934112
15°	854901
20°	678231
25°	423429
30°	233390
35°	104799
40°	41277
45°	19454
50°	9230
55°	4819
60°	2382
65°	569
70°	224
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19454 cd/sqm



TEST NUMBER: P790930

CATALOG NUMBER: LER6D25D010-EC6DR4520359040-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	836.4	16.1
10°-20°	2058.5	39.6
20°-30°	1630.2	31.3
30°-40°	542.9	10.4
40°-50°	107.8	2.1
50°-60°	24.5	0.5
60°-70°	3.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4525.1	87.0
0°-40°	5068.0	97.4
0°-60°	5200.2	99.9
0°-90°	5203.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5203.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9198	
5°	8902	836
15°	7558	2059
25°	3512	1630
35°	786	543
45°	126	108
55°	25	24
65°	2	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P790930

CATALOG NUMBER: LER6D25D010-EC6DR4520359040-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	9197.9
2.5°	9137.8
5°	8902.0
7.5°	8707.4
10°	8419.5
12.5°	8036.0
15°	7557.8
17.5°	6838.7
20°	5833.1
22.5°	4635.1
25°	3512.3
27.5°	2571.9
30°	1849.9
32.5°	1258.1
35°	785.7
37.5°	465.9
40°	289.4
42.5°	190.3
45°	125.9
47.5°	81.0
50°	54.3
52.5°	36.2
55°	25.3
57.5°	16.6
60°	10.9
62.5°	5.8
65°	2.2
67.5°	0.7
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)