

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791039

Luminaire Tested: LER6D25D010-EC6DR6020359024-6LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P791039  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D25D010-EC6DR6020359024-6LBDDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3409.7 lumens  
Efficiency: N/A  
Efficacy: 135.8 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P791039

CATALOG NUMBER: LER6D25D010-EC6DR6020359024-6LBDP1B

### Luminous Intensity Polar Plot

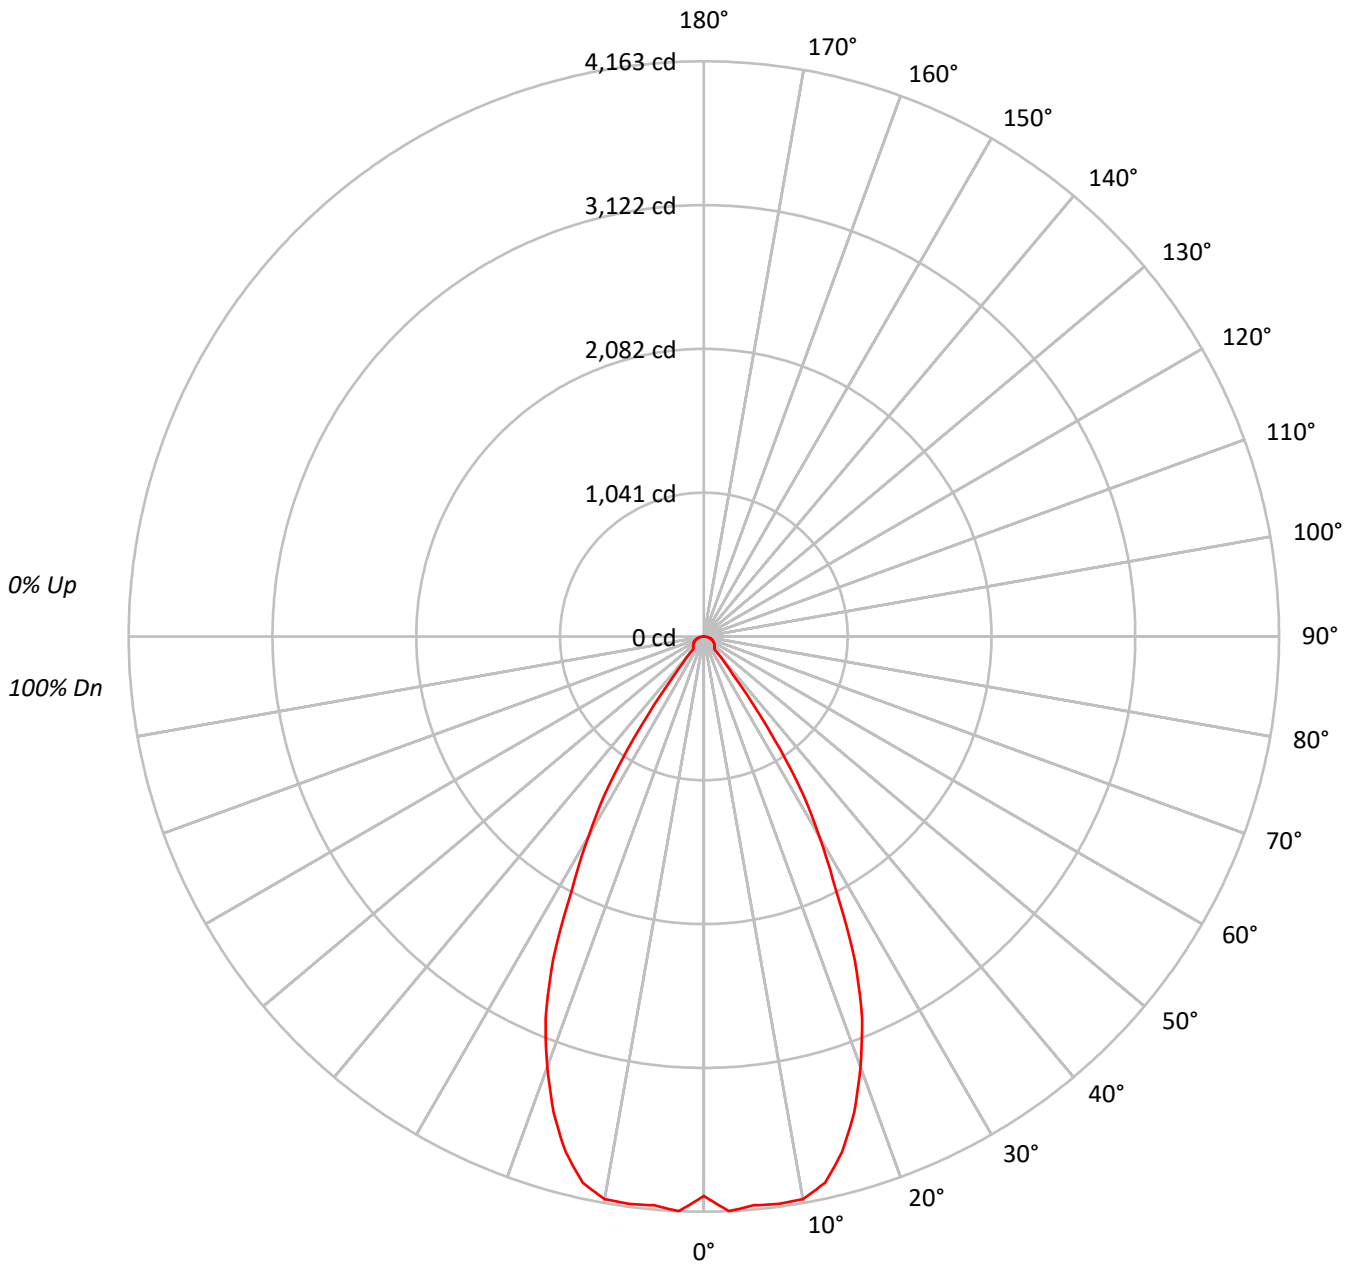



TEST NUMBER: P791039

CATALOG NUMBER: LER6D25D010-EC6DR6020359024-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86		
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66		
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62		
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	442440
5°	453322
10°	458796
15°	437065
20°	385363
25°	311685
30°	210832
35°	105652
40°	17144
45°	16781
50°	17117
55°	17373
60°	17853
65°	18252
70°	18688
75°	18912
80°	18247
85°	15169

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 18912 cd/sqm



TEST NUMBER: P791039

CATALOG NUMBER: LER6D25D010-EC6DR6020359024-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	395.0	11.6
10°-20°	1068.8	31.3
20°-30°	1149.9	33.7
30°-40°	499.9	14.7
40°-50°	84.0	2.5
50°-60°	81.6	2.4
60°-70°	69.8	2.0
70°-80°	46.7	1.4
80°-90°	14.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2613.7	76.7
0°-40°	3113.6	91.3
0°-60°	3279.2	96.2
0°-90°	3409.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3409.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4049	
5°	4133	395
15°	3864	1069
25°	2585	1150
35°	792	500
45°	109	84
55°	91	82
65°	71	70
75°	45	47
85°	12	14
90°	0	



TEST NUMBER: P791039

CATALOG NUMBER: LER6D25D010-EC6DR6020359024-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4049.4
2.5°	4163.3
5°	4133.2
7.5°	4142.7
10°	4135.3
12.5°	4050.0
15°	3863.9
17.5°	3614.1
20°	3314.3
22.5°	2993.3
25°	2585.4
27.5°	2067.9
30°	1671.1
32.5°	1288.0
35°	792.1
37.5°	338.9
40°	120.2
42.5°	110.7
45°	108.6
47.5°	104.9
50°	100.7
52.5°	95.9
55°	91.2
57.5°	86.4
60°	81.7
62.5°	76.4
65°	70.6
67.5°	64.8
70°	58.5
72.5°	51.6
75°	44.8
77.5°	36.9
80°	29.0
82.5°	20.6
85°	12.1
87.5°	4.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)