

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791094

Luminaire Tested: LER6D25D010-EC6DR6520359024-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P791094  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D25D010-EC6DR6520359024-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3784.3 lumens  
Efficiency: N/A  
Efficacy: 150.8 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P791094

CATALOG NUMBER: LER6D25D010-EC6DR6520359024-6LBS1MW

### Luminous Intensity Polar Plot

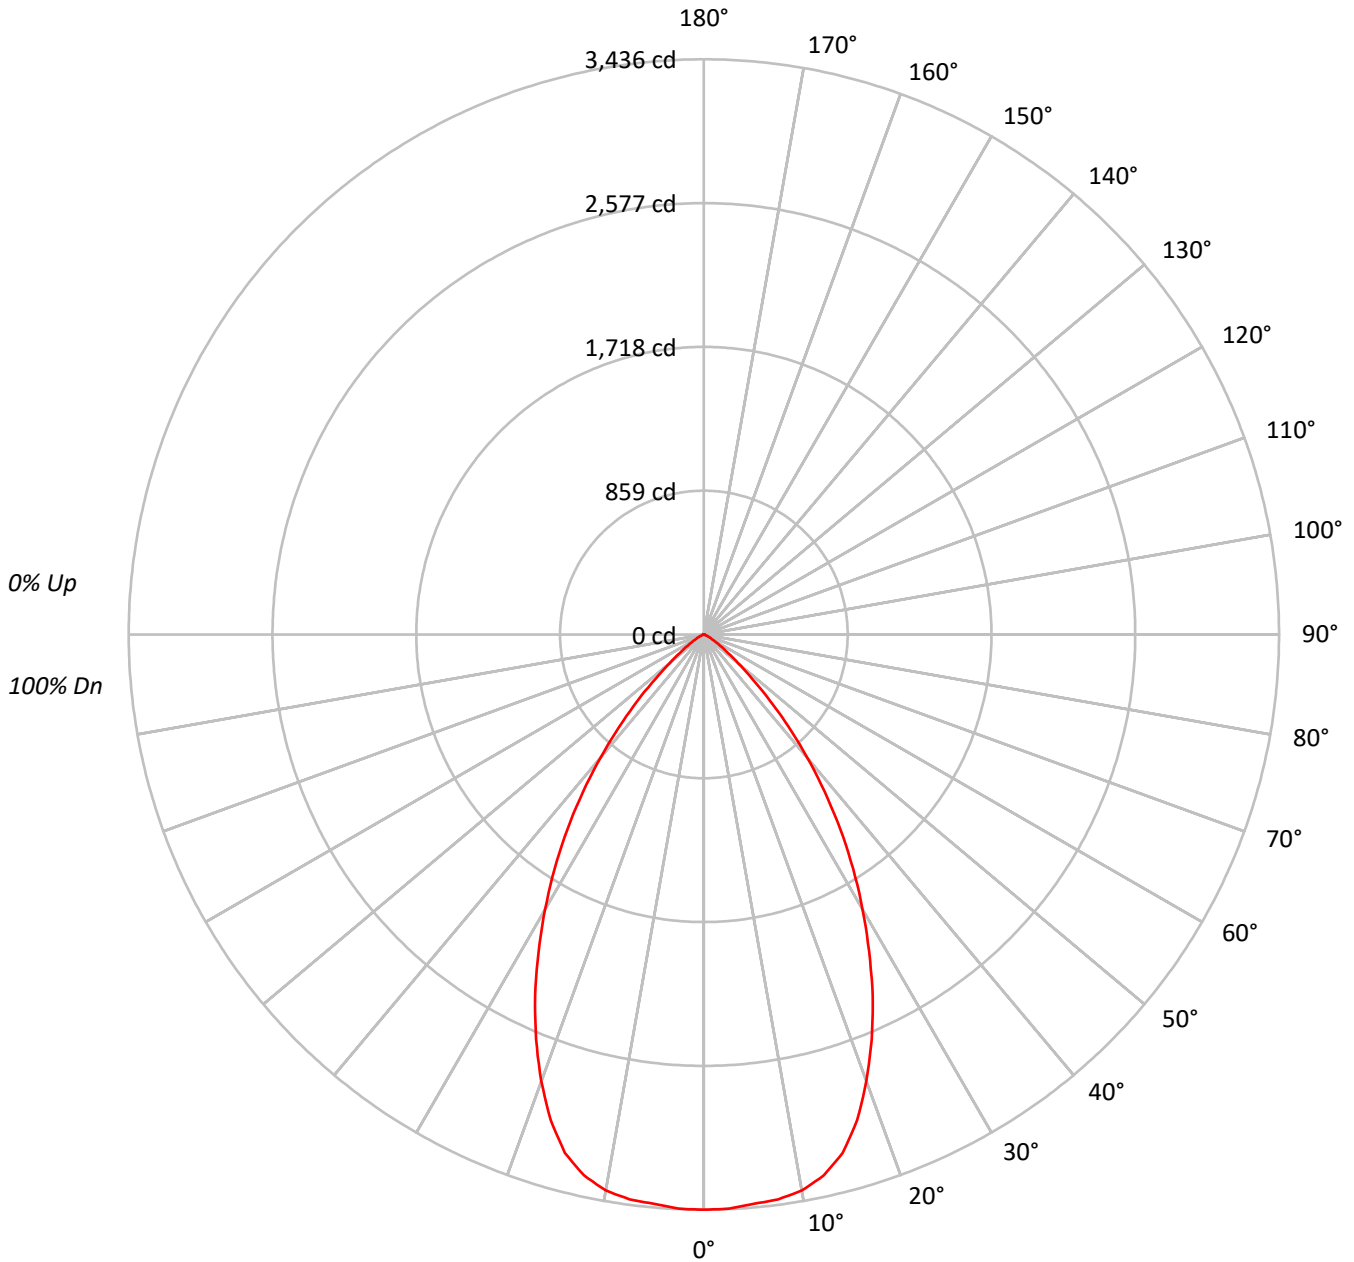



TEST NUMBER: P791094

CATALOG NUMBER: LER6D25D010-EC6DR6520359024-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	200676
5°	200170
10°	200000
15°	193830
20°	176462
25°	153777
30°	127898
35°	101343
40°	73145
45°	46212
50°	24087
55°	12799
60°	6728
65°	3704
70°	1554
75°	1715
80°	1177
85°	1005

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 46212 cd/sqm



TEST NUMBER: P791094

CATALOG NUMBER: LER6D25D010-EC6DR6520359024-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	324.9	8.6
10°-20°	889.8	23.5
20°-30°	1087.6	28.7
30°-40°	882.5	23.3
40°-50°	439.8	11.6
50°-60°	122.7	3.2
60°-70°	27.9	0.7
70°-80°	7.2	0.2
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2302.4	60.8
0°-40°	3184.9	84.2
0°-60°	3747.3	99.0
0°-90°	3784.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3784.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3436	
5°	3414	325
15°	3206	890
25°	2386	1088
35°	1421	882
45°	560	440
55°	126	123
65°	27	28
75°	8	7
85°	2	2
90°	0	



TEST NUMBER: P791094

CATALOG NUMBER: LER6D25D010-EC6DR6520359024-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3436.0
2.5°	3433.5
5°	3414.3
7.5°	3403.2
10°	3372.4
12.5°	3309.8
15°	3205.7
17.5°	3043.2
20°	2839.2
22.5°	2619.0
25°	2386.3
27.5°	2137.3
30°	1896.5
32.5°	1658.7
35°	1421.4
37.5°	1184.5
40°	959.4
42.5°	748.3
45°	559.5
47.5°	389.8
50°	265.1
52.5°	182.8
55°	125.7
57.5°	84.8
60°	57.6
62.5°	39.9
65°	26.8
67.5°	13.6
70°	9.1
72.5°	8.6
75°	7.6
77.5°	5.0
80°	3.5
82.5°	2.5
85°	1.5
87.5°	1.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)