

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791095

Luminaire Tested: LER6D25D010-EC6DR6520359027-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P791095
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D25D010-EC6DR6520359027-6LB DP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3128.4 lumens
Efficiency: N/A
Efficacy: 124.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P791095
CATALOG NUMBER: LER6D25D010-EC6DR6520359027-6LBDP1B

Luminous Intensity Polar Plot

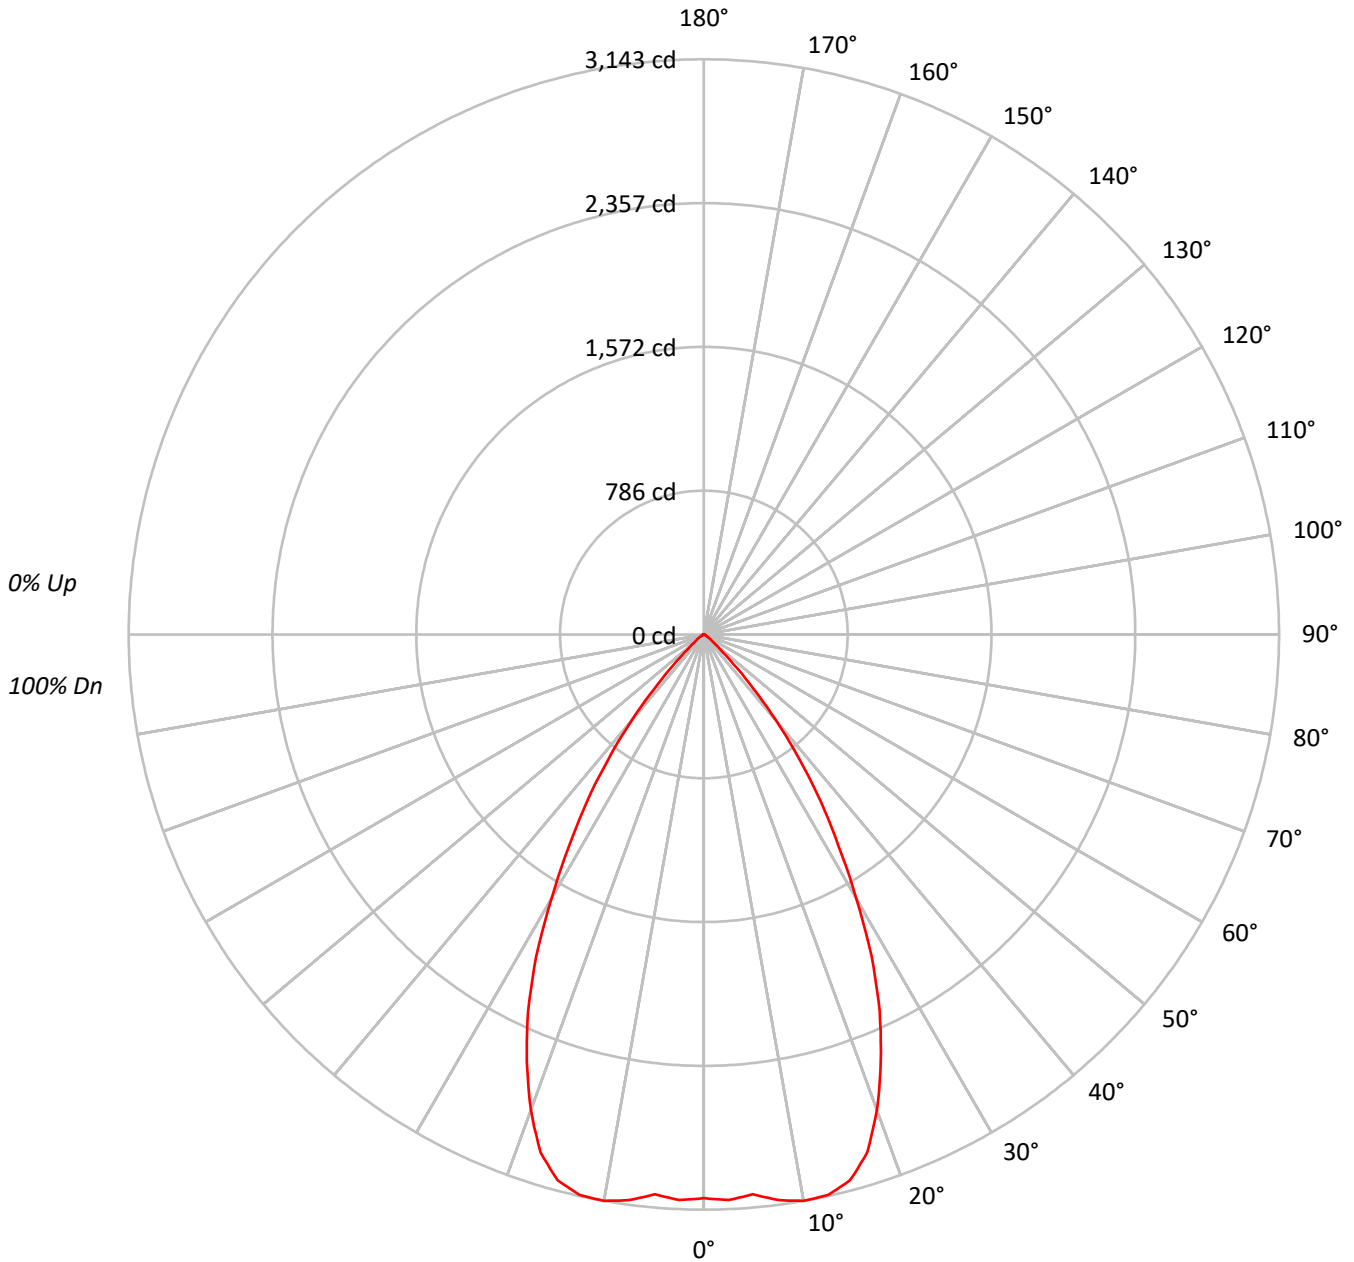



TEST NUMBER: P791095

CATALOG NUMBER: LER6D25D010-EC6DR6520359027-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	336534
5°	336811
10°	348671
15°	349254
20°	321541
25°	273975
30°	209734
35°	148175
40°	87461
45°	35508
50°	12867
55°	7162
60°	4108
65°	2275
70°	2364
75°	1857
80°	1951
85°	1630

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 35508 cd/sqm



TEST NUMBER: P791095

CATALOG NUMBER: LER6D25D010-EC6DR6520359027-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	296.6	9.5
10°-20°	855.5	27.3
20°-30°	1026.5	32.8
30°-40°	689.8	22.0
40°-50°	206.5	6.6
50°-60°	36.4	1.2
60°-70°	10.4	0.3
70°-80°	5.1	0.2
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2178.6	69.6
0°-40°	2868.4	91.7
0°-60°	3111.3	99.5
0°-90°	3128.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3128.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3080	
5°	3071	297
15°	3088	856
25°	2273	1026
35°	1111	690
45°	230	207
55°	38	36
65°	9	10
75°	4	5
85°	1	2
90°	0	



TEST NUMBER: P791095

CATALOG NUMBER: LER6D25D010-EC6DR6520359027-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	3080.1
2.5°	3093.3
5°	3070.9
7.5°	3117.3
10°	3142.7
12.5°	3136.6
15°	3087.6
17.5°	2967.6
20°	2765.4
22.5°	2527.3
25°	2272.6
27.5°	1985.0
30°	1662.4
32.5°	1370.0
35°	1110.9
37.5°	854.8
40°	613.2
42.5°	400.5
45°	229.8
47.5°	121.7
50°	75.7
52.5°	52.5
55°	37.6
57.5°	27.1
60°	18.8
62.5°	12.3
65°	8.8
67.5°	7.9
70°	7.4
72.5°	5.7
75°	4.4
77.5°	3.9
80°	3.1
82.5°	2.2
85°	1.3
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)