

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791106

Luminaire Tested: LER6D25D010-EC6DR6520359030-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P791106
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D25D010-EC6DR6520359030-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3741.5 lumens
Efficiency: N/A
Efficacy: 149.1 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P791106
CATALOG NUMBER: LER6D25D010-EC6DR6520359030-6LBDP1MW

Luminous Intensity Polar Plot

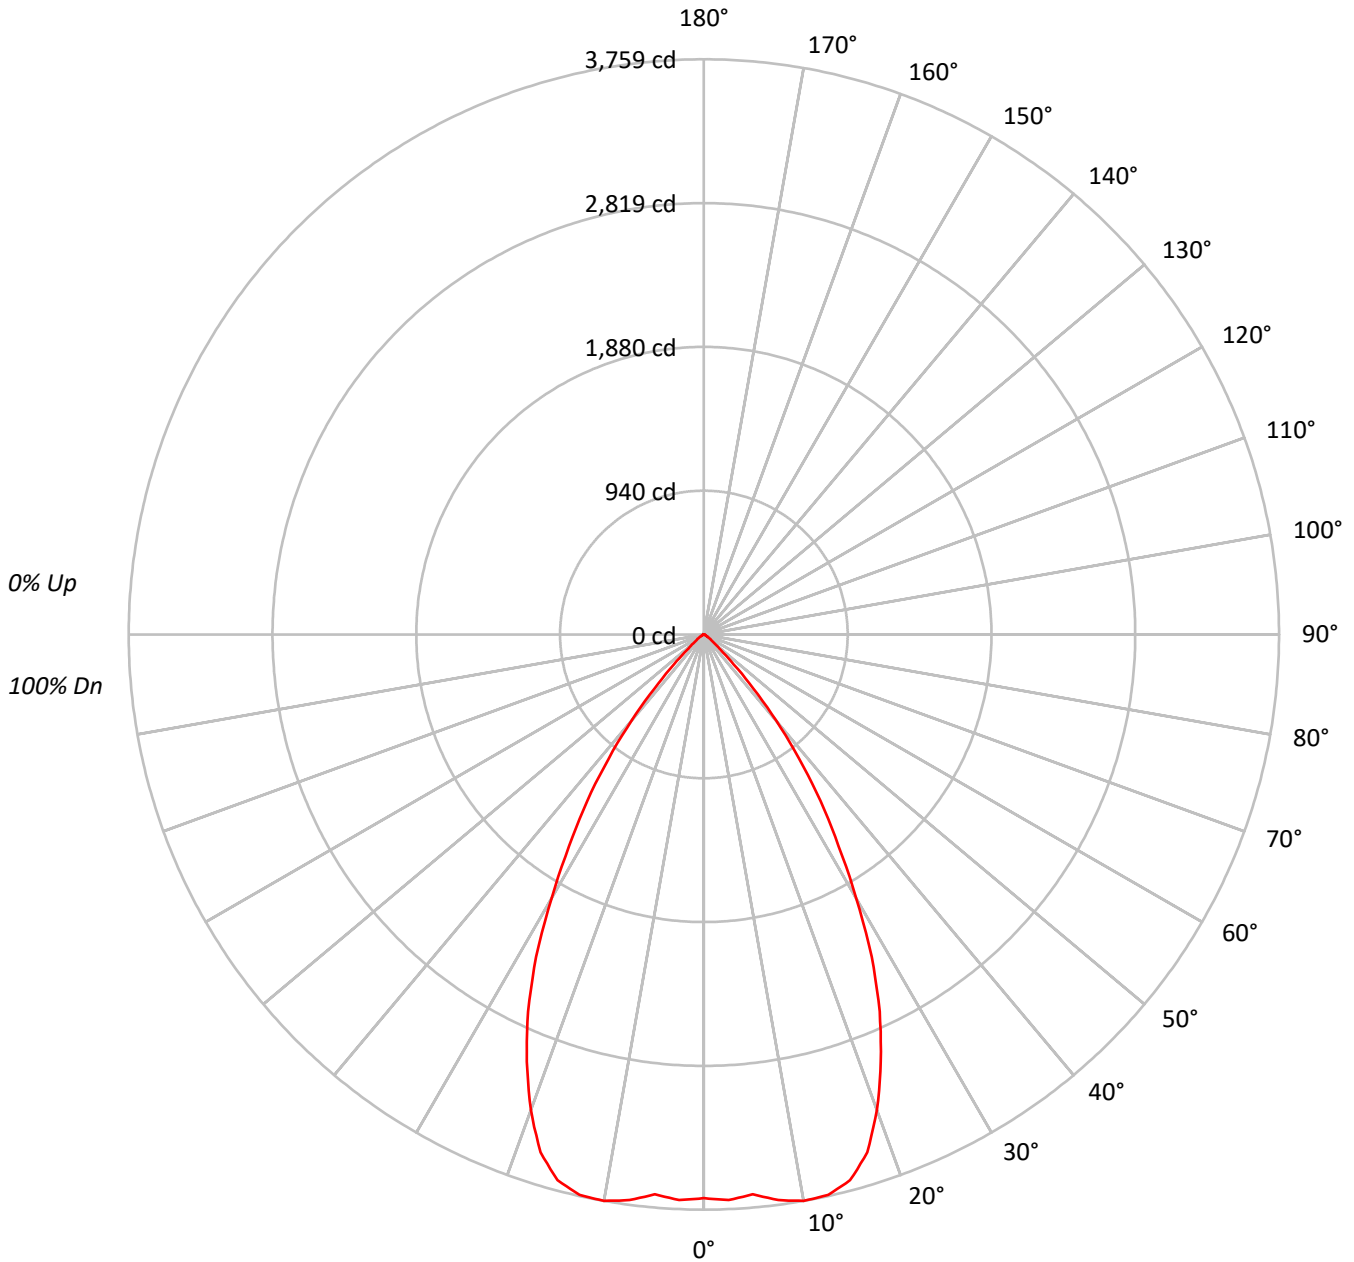



TEST NUMBER: P791106

CATALOG NUMBER: LER6D25D010-EC6DR6520359030-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	402495
5°	402826
10°	417014
15°	417700
20°	384561
25°	327671
30°	250838
35°	177212
40°	104605
45°	42462
50°	15400
55°	8572
60°	4917
65°	2715
70°	2843
75°	2195
80°	2328
85°	2006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 42462 cd/sqm



TEST NUMBER: P791106

CATALOG NUMBER: LER6D25D010-EC6DR6520359030-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	354.7	9.5
10°-20°	1023.2	27.3
20°-30°	1227.6	32.8
30°-40°	825.0	22.1
40°-50°	247.0	6.6
50°-60°	43.6	1.2
60°-70°	12.4	0.3
70°-80°	6.1	0.2
80°-90°	1.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2605.6	69.6
0°-40°	3430.6	91.7
0°-60°	3721.1	99.5
0°-90°	3741.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3741.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3684	
5°	3673	355
15°	3693	1023
25°	2718	1228
35°	1329	825
45°	275	247
55°	45	44
65°	10	12
75°	5	6
85°	2	2
90°	0	



TEST NUMBER: P791106

CATALOG NUMBER: LER6D25D010-EC6DR6520359030-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3683.8
2.5°	3699.5
5°	3672.8
7.5°	3728.3
10°	3758.7
12.5°	3751.3
15°	3692.7
17.5°	3549.3
20°	3307.4
22.5°	3022.6
25°	2718.0
27.5°	2374.0
30°	1988.2
32.5°	1638.5
35°	1328.6
37.5°	1022.4
40°	733.4
42.5°	479.0
45°	274.8
47.5°	145.5
50°	90.6
52.5°	62.8
55°	45.0
57.5°	32.5
60°	22.5
62.5°	14.7
65°	10.5
67.5°	9.4
70°	8.9
72.5°	6.8
75°	5.2
77.5°	4.7
80°	3.7
82.5°	2.6
85°	1.6
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)