

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791131

Luminaire Tested: LER6D25D010-EC6DR6520359050-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P791131
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D25D010-EC6DR6520359050-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4543.7 lumens
Efficiency: N/A
Efficacy: 181.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P791131

CATALOG NUMBER: LER6D25D010-EC6DR6520359050-6LBS1B

Luminous Intensity Polar Plot

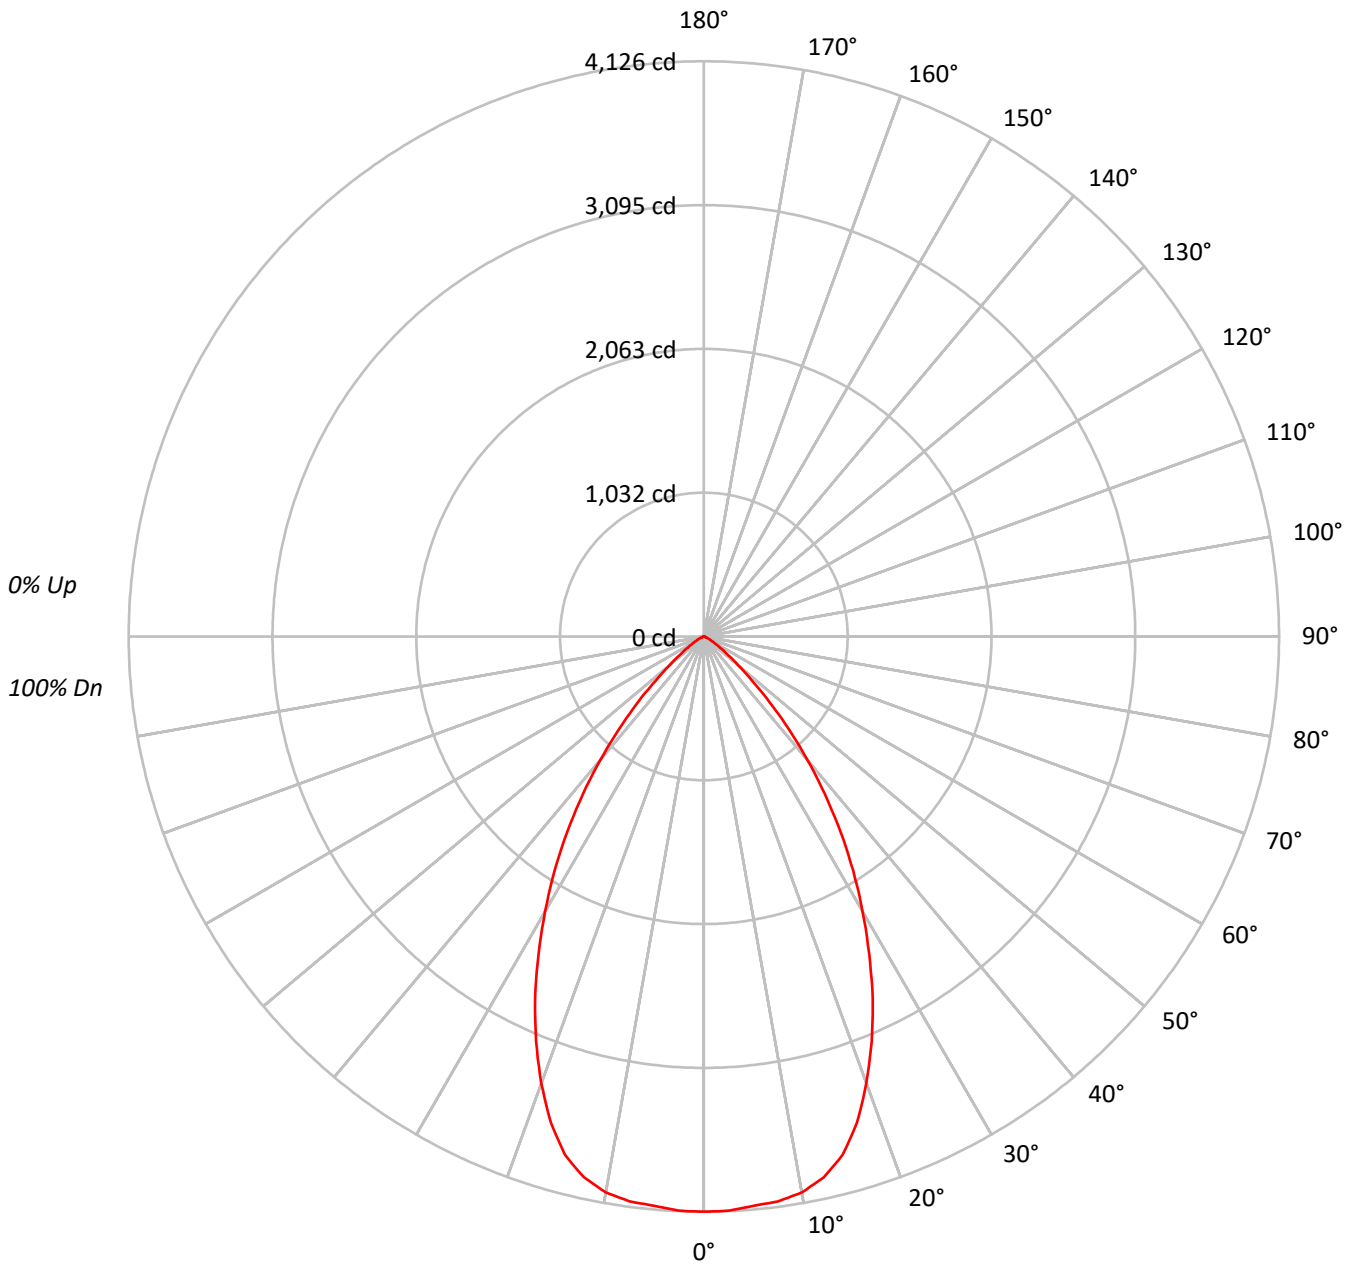



TEST NUMBER: P791131
 CATALOG NUMBER: LER6D25D010-EC6DR6520359050-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	240951
5°	240341
10°	240137
15°	232733
20°	211877
25°	184638
30°	153565
35°	121677
40°	87822
45°	55479
50°	28921
55°	15375
60°	8071
65°	4436
70°	1861
75°	2053
80°	1413
85°	1206

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 55479 cd/sqm



TEST NUMBER: P791131

CATALOG NUMBER: LER6D25D010-EC6DR6520359050-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	390.1	8.6
10°-20°	1068.4	23.5
20°-30°	1305.9	28.7
30°-40°	1059.6	23.3
40°-50°	528.0	11.6
50°-60°	147.3	3.2
60°-70°	33.5	0.7
70°-80°	8.7	0.2
80°-90°	2.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2764.4	60.8
0°-40°	3824.0	84.2
0°-60°	4499.3	99.0
0°-90°	4543.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4543.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4126	
5°	4100	390
15°	3849	1068
25°	2865	1306
35°	1707	1060
45°	672	528
55°	151	147
65°	32	33
75°	9	9
85°	2	2
90°	0	



TEST NUMBER: P791131

CATALOG NUMBER: LER6D25D010-EC6DR6520359050-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	4125.6
2.5°	4122.5
5°	4099.5
7.5°	4086.1
10°	4049.2
12.5°	3974.0
15°	3849.1
17.5°	3653.9
20°	3409.0
22.5°	3144.6
25°	2865.2
27.5°	2566.3
30°	2277.1
32.5°	1991.5
35°	1706.6
37.5°	1422.3
40°	1151.9
42.5°	898.5
45°	671.7
47.5°	468.0
50°	318.3
52.5°	219.5
55°	151.0
57.5°	101.9
60°	69.1
62.5°	47.9
65°	32.1
67.5°	16.4
70°	10.9
72.5°	10.3
75°	9.1
77.5°	6.1
80°	4.2
82.5°	3.0
85°	1.8
87.5°	1.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)