

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791159

Luminaire Tested: LER6D25D010-EC6DR7020359035-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P791159
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D25D010-EC6DR7020359035-6LBDDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3068.4 lumens
Efficiency: N/A
Efficacy: 122.2 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P791159

CATALOG NUMBER: LER6D25D010-EC6DR7020359035-6LBDP1B

Luminous Intensity Polar Plot

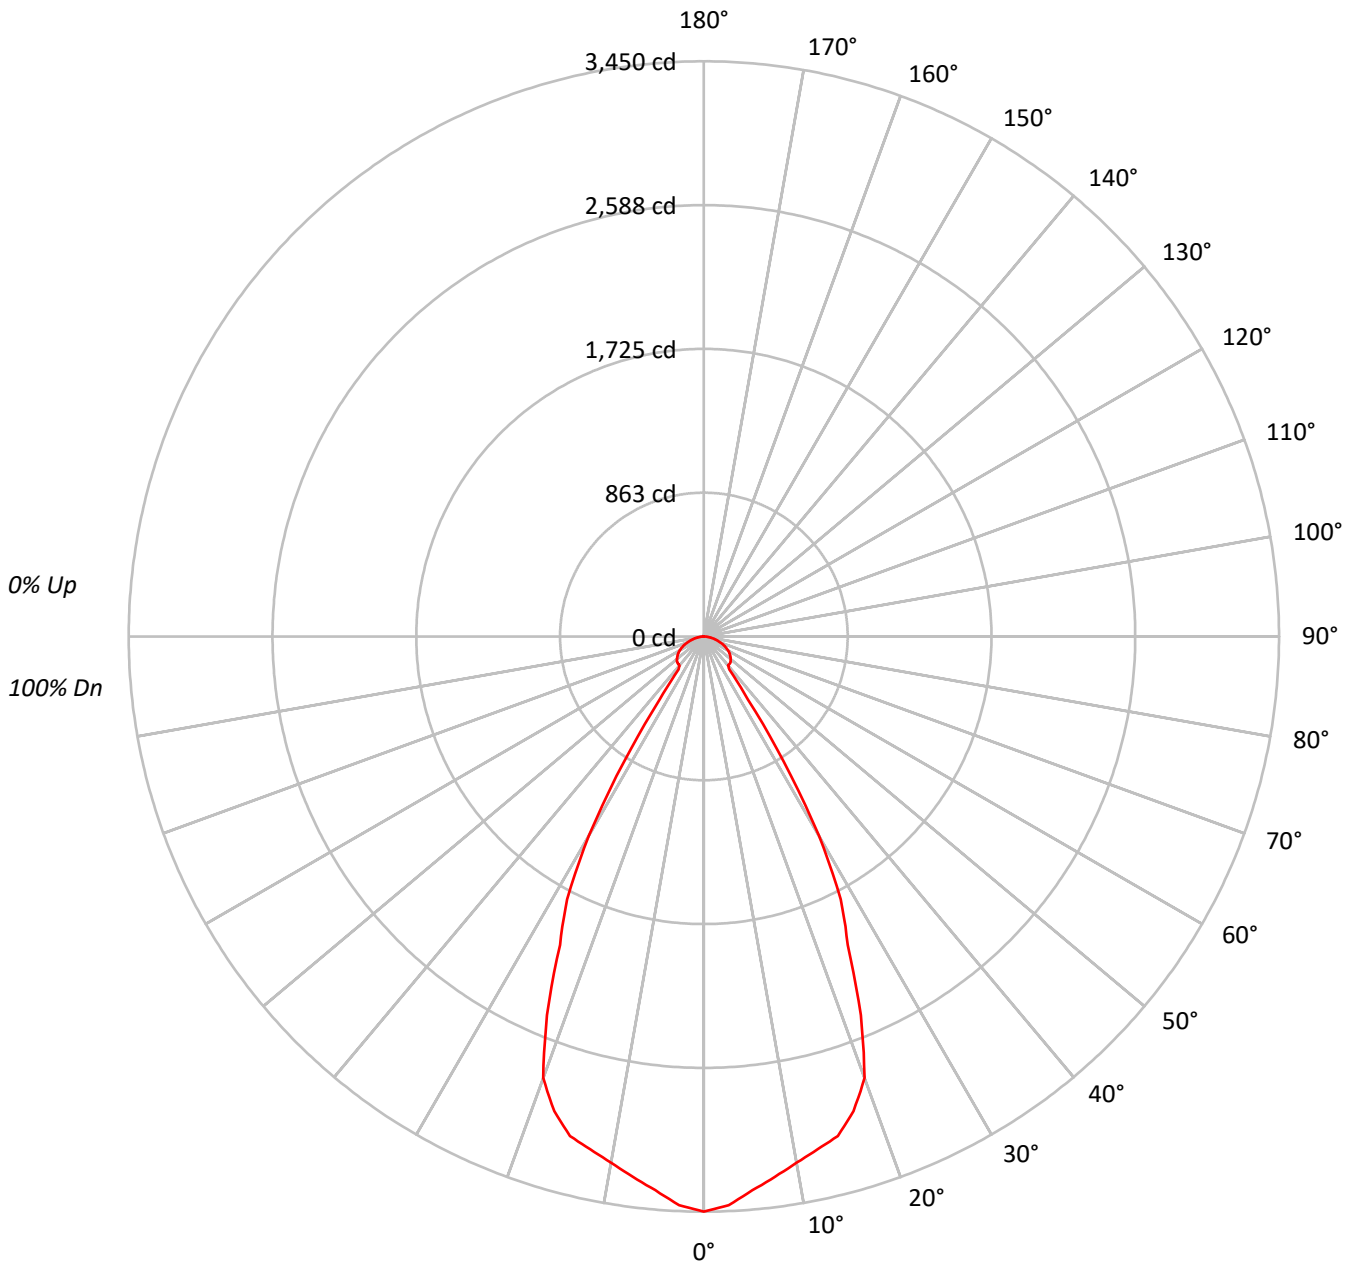



TEST NUMBER: P791159

CATALOG NUMBER: LER6D25D010-EC6DR7020359035-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	376917
5°	365722
10°	355527
15°	350860
20°	327634
25°	246139
30°	173992
35°	61636
40°	32405
45°	34519
50°	35747
55°	36422
60°	36646
65°	35859
70°	33862
75°	31366
80°	27811
85°	22565

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 60°
 Luminance: 36646 cd/sqm



TEST NUMBER: P791159

CATALOG NUMBER: LER6D25D010-EC6DR7020359035-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	314.5	10.3
10°-20°	862.7	28.1
20°-30°	950.1	31.0
30°-40°	363.0	11.8
40°-50°	171.4	5.6
50°-60°	170.4	5.6
60°-70°	136.4	4.4
70°-80°	78.4	2.6
80°-90°	21.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2127.4	69.3
0°-40°	2490.4	81.2
0°-60°	2832.2	92.3
0°-90°	3068.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3068.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3450	
5°	3334	315
15°	3102	863
25°	2042	950
35°	462	363
45°	223	171
55°	191	170
65°	139	136
75°	74	78
85°	18	21
90°	0	



TEST NUMBER: P791159

CATALOG NUMBER: LER6D25D010-EC6DR7020359035-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3449.7
2.5°	3413.7
5°	3334.5
7.5°	3268.4
10°	3204.5
12.5°	3150.4
15°	3101.8
17.5°	2984.4
20°	2817.8
22.5°	2458.4
25°	2041.7
27.5°	1777.3
30°	1379.1
32.5°	890.8
35°	462.1
37.5°	249.6
40°	227.2
42.5°	225.6
45°	223.4
47.5°	218.5
50°	210.3
52.5°	201.0
55°	191.2
57.5°	180.2
60°	167.7
62.5°	153.5
65°	138.7
67.5°	122.3
70°	106.0
72.5°	89.6
75°	74.3
77.5°	58.4
80°	44.2
82.5°	31.1
85°	18.0
87.5°	7.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)