

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791495

Luminaire Tested: LER6D30D010-EC6DR4520359035-6LBDP1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P791495  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D30D010-EC6DR4520359035-6LBDDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5301.6 lumens  
Efficiency: N/A  
Efficacy: 182.8 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P791495  
CATALOG NUMBER: LER6D30D010-EC6DR4520359035-6LBDP1B

### Luminous Intensity Polar Plot

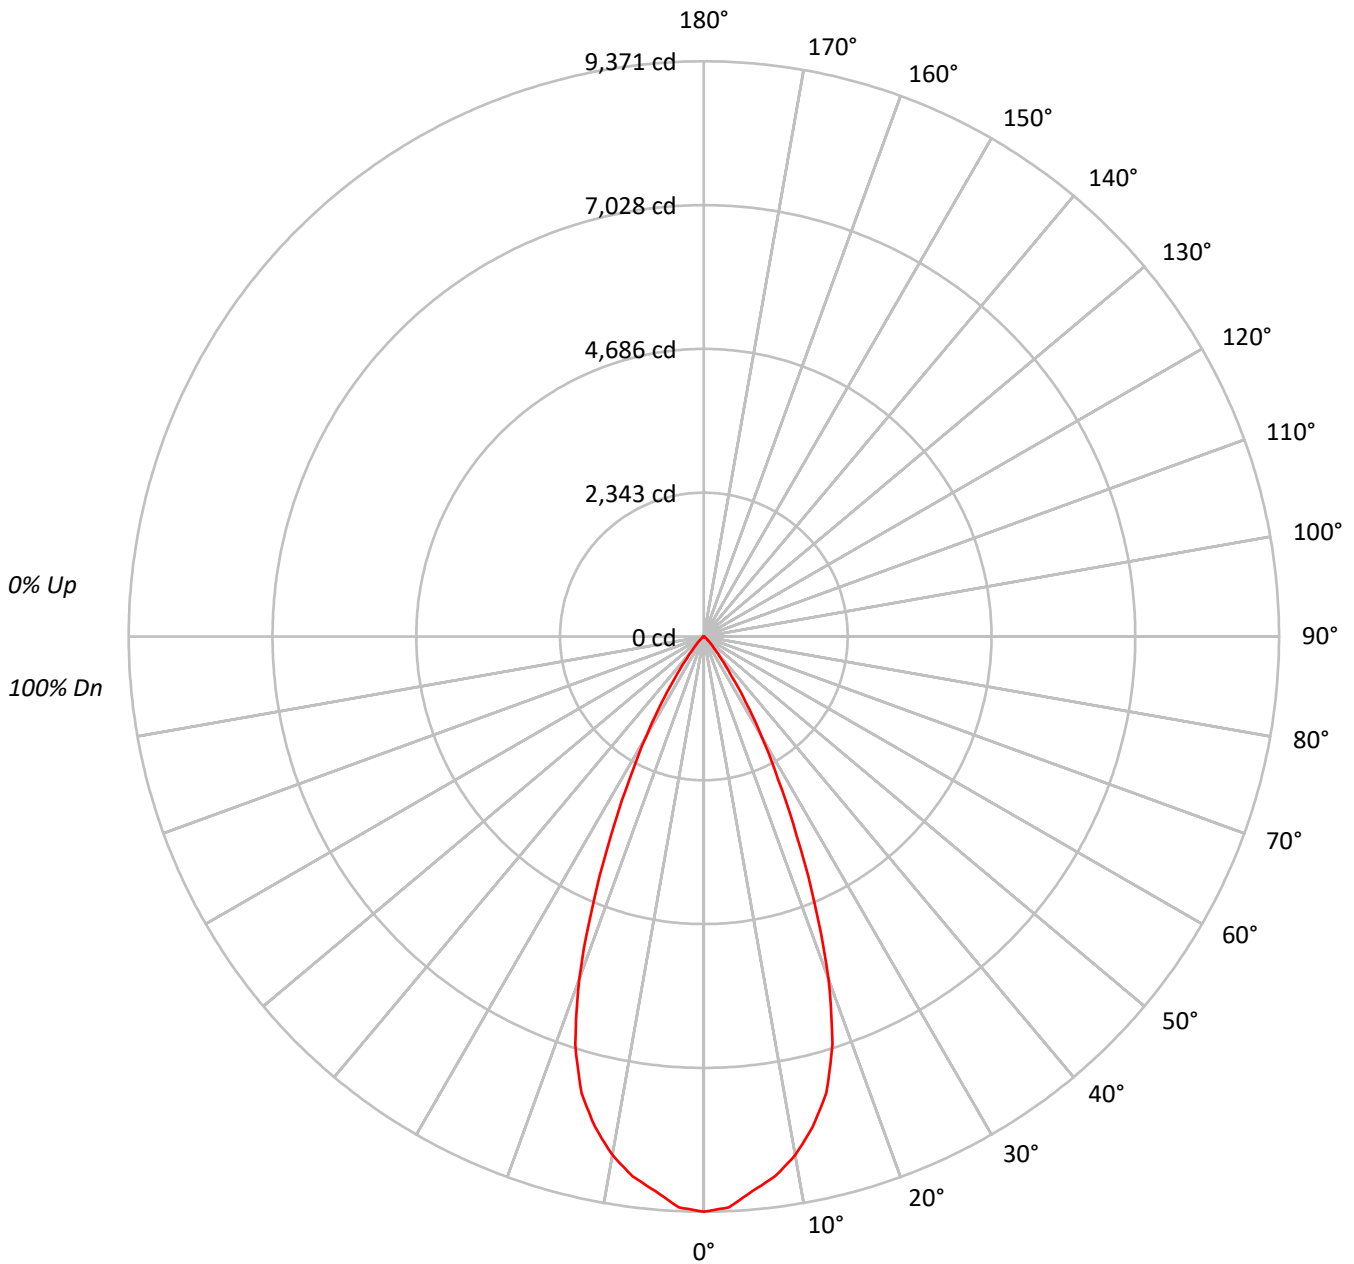



TEST NUMBER: P791495

CATALOG NUMBER: LER6D30D010-EC6DR4520359035-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95			95																
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90			90																
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85			85																
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81			81																
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77			77																
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73			73																
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69			69																
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66			66																
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63			63																
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60			60																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1023861
5°	994704
10°	951664
15°	870975
20°	690986
25°	431397
30°	237768
35°	106760
40°	42047
45°	19809
50°	9400
55°	4915
60°	2426
65°	569
70°	224
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 19809 cd/sqm



TEST NUMBER: P791495

CATALOG NUMBER: LER6D30D010-EC6DR4520359035-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	852.2	16.1
10°-20°	2097.2	39.6
20°-30°	1660.8	31.3
30°-40°	553.1	10.4
40°-50°	109.7	2.1
50°-60°	25.0	0.5
60°-70°	3.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4610.2	87.0
0°-40°	5163.3	97.4
0°-60°	5298.0	99.9
0°-90°	5301.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5301.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9371	
5°	9069	852
15°	7700	2097
25°	3578	1661
35°	800	553
45°	128	110
55°	26	25
65°	2	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P791495

CATALOG NUMBER: LER6D30D010-EC6DR4520359035-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9370.8
2.5°	9309.6
5°	9069.3
7.5°	8871.1
10°	8577.7
12.5°	8187.1
15°	7699.9
17.5°	6967.3
20°	5942.8
22.5°	4722.3
25°	3578.4
27.5°	2620.2
30°	1884.6
32.5°	1281.7
35°	800.4
37.5°	474.7
40°	294.8
42.5°	193.8
45°	128.2
47.5°	82.5
50°	55.3
52.5°	36.9
55°	25.8
57.5°	17.0
60°	11.1
62.5°	5.9
65°	2.2
67.5°	0.7
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)