

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P791740

Luminaire Tested: LER6D30D010-EC6DR7020359035-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P791740
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D30D010-EC6DR7020359035-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6239.4 lumens
Efficiency: N/A
Efficacy: 215.2 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 29
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P791740
CATALOG NUMBER: LER6D30D010-EC6DR7020359035-6LBS1H

Luminous Intensity Polar Plot

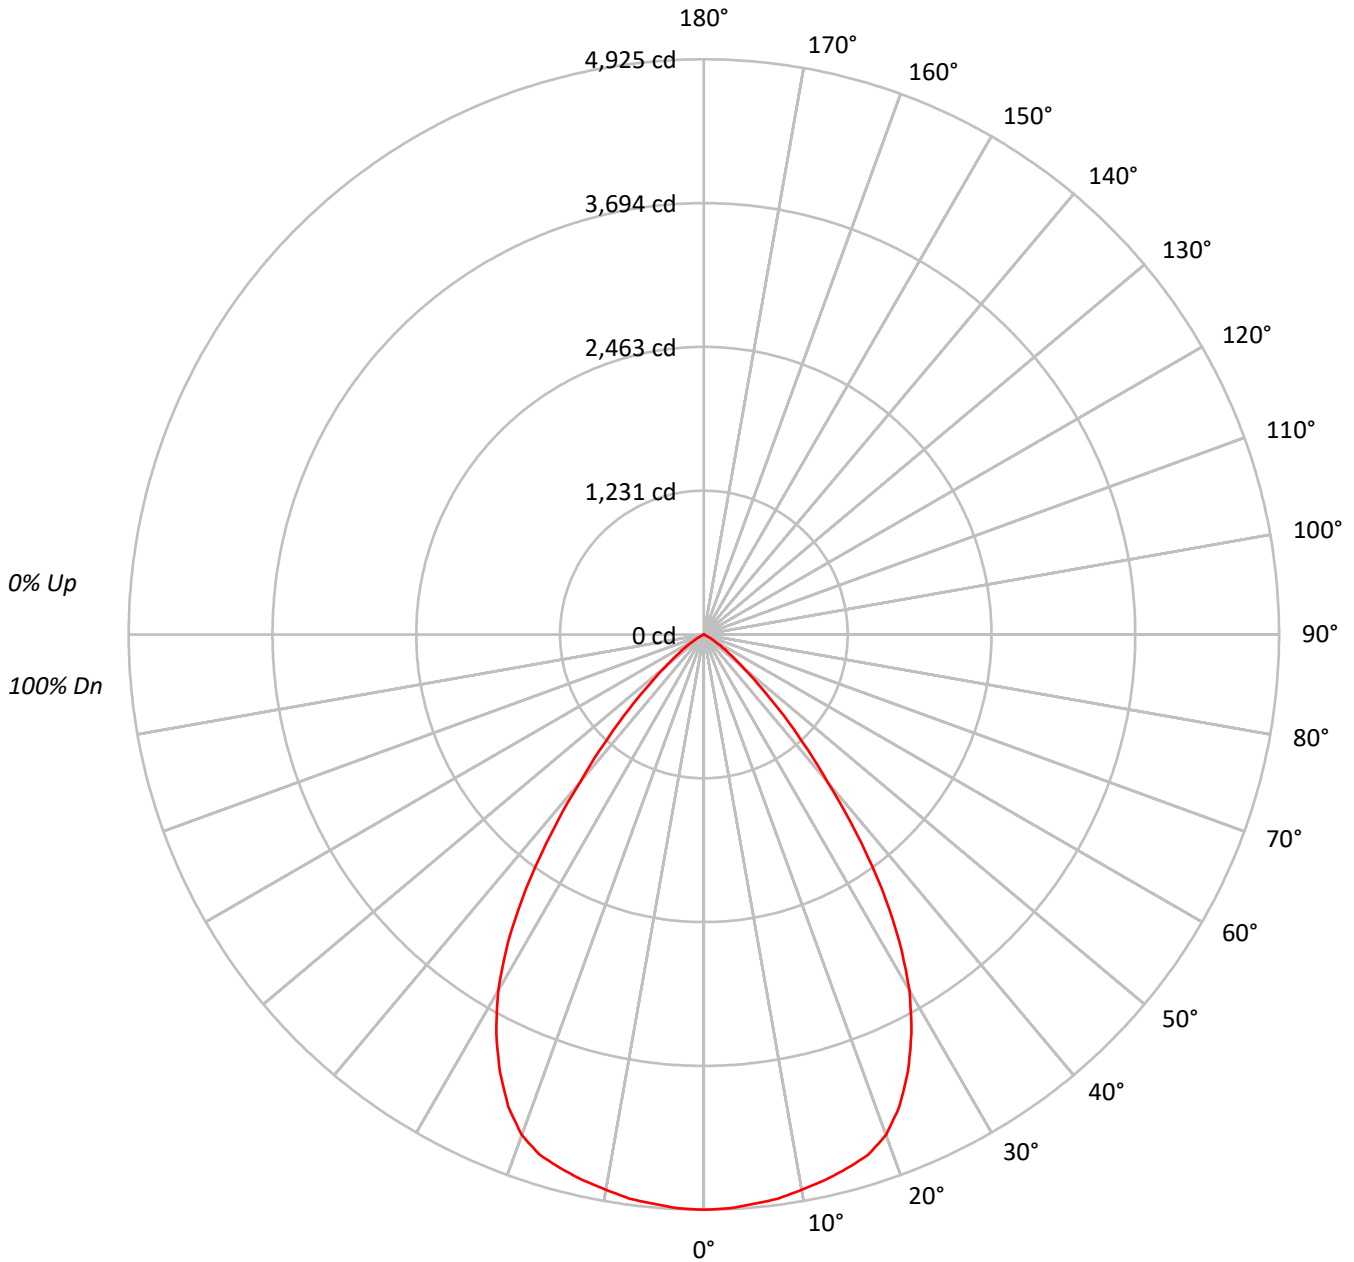



TEST NUMBER: P791740

CATALOG NUMBER: LER6D30D010-EC6DR7020359035-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93						93													
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85						85													
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78						78													
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71						71													
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65						65													
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60						60													
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56						56													
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51						51													
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48						48													
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44						44													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	538076
5°	536732
10°	535571
15°	535419
20°	530181
25°	498041
30°	444007
35°	354011
40°	235068
45°	140534
50°	72853
55°	38289
60°	13548
65°	233
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 140534 cd/sqm



TEST NUMBER: P791740

CATALOG NUMBER: LER6D30D010-EC6DR7020359035-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	465.4	7.5
10°-20°	1334.7	21.4
20°-30°	1882.9	30.2
30°-40°	1625.5	26.1
40°-50°	727.9	11.7
50°-60°	190.6	3.1
60°-70°	12.4	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3683.0	59.0
0°-40°	5308.5	85.1
0°-60°	6227.0	99.8
0°-90°	6239.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6239.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4925	
5°	4894	465
15°	4733	1335
25°	4131	1883
35°	2654	1625
45°	910	728
55°	201	191
65°	1	12
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P791740

CATALOG NUMBER: LER6D30D010-EC6DR7020359035-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	4924.7
2.5°	4919.4
5°	4893.7
7.5°	4872.4
10°	4827.3
12.5°	4786.5
15°	4733.4
17.5°	4672.3
20°	4559.8
22.5°	4374.7
25°	4131.2
27.5°	3848.7
30°	3519.3
32.5°	3116.3
35°	2654.1
37.5°	2144.0
40°	1648.1
42.5°	1252.2
45°	909.5
47.5°	627.0
50°	428.6
52.5°	295.8
55°	201.0
57.5°	121.3
60°	62.0
62.5°	19.5
65°	0.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)