

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792088

Luminaire Tested: LER6D35BD010-EC6DR5520359050-6LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P792088  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D35BD010-EC6DR5520359050-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 55° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4142.7 lumens  
Efficiency: N/A  
Efficacy: 134.5 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P792088

CATALOG NUMBER: LER6D35BD010-EC6DR5520359050-6LBDP1H

### Luminous Intensity Polar Plot

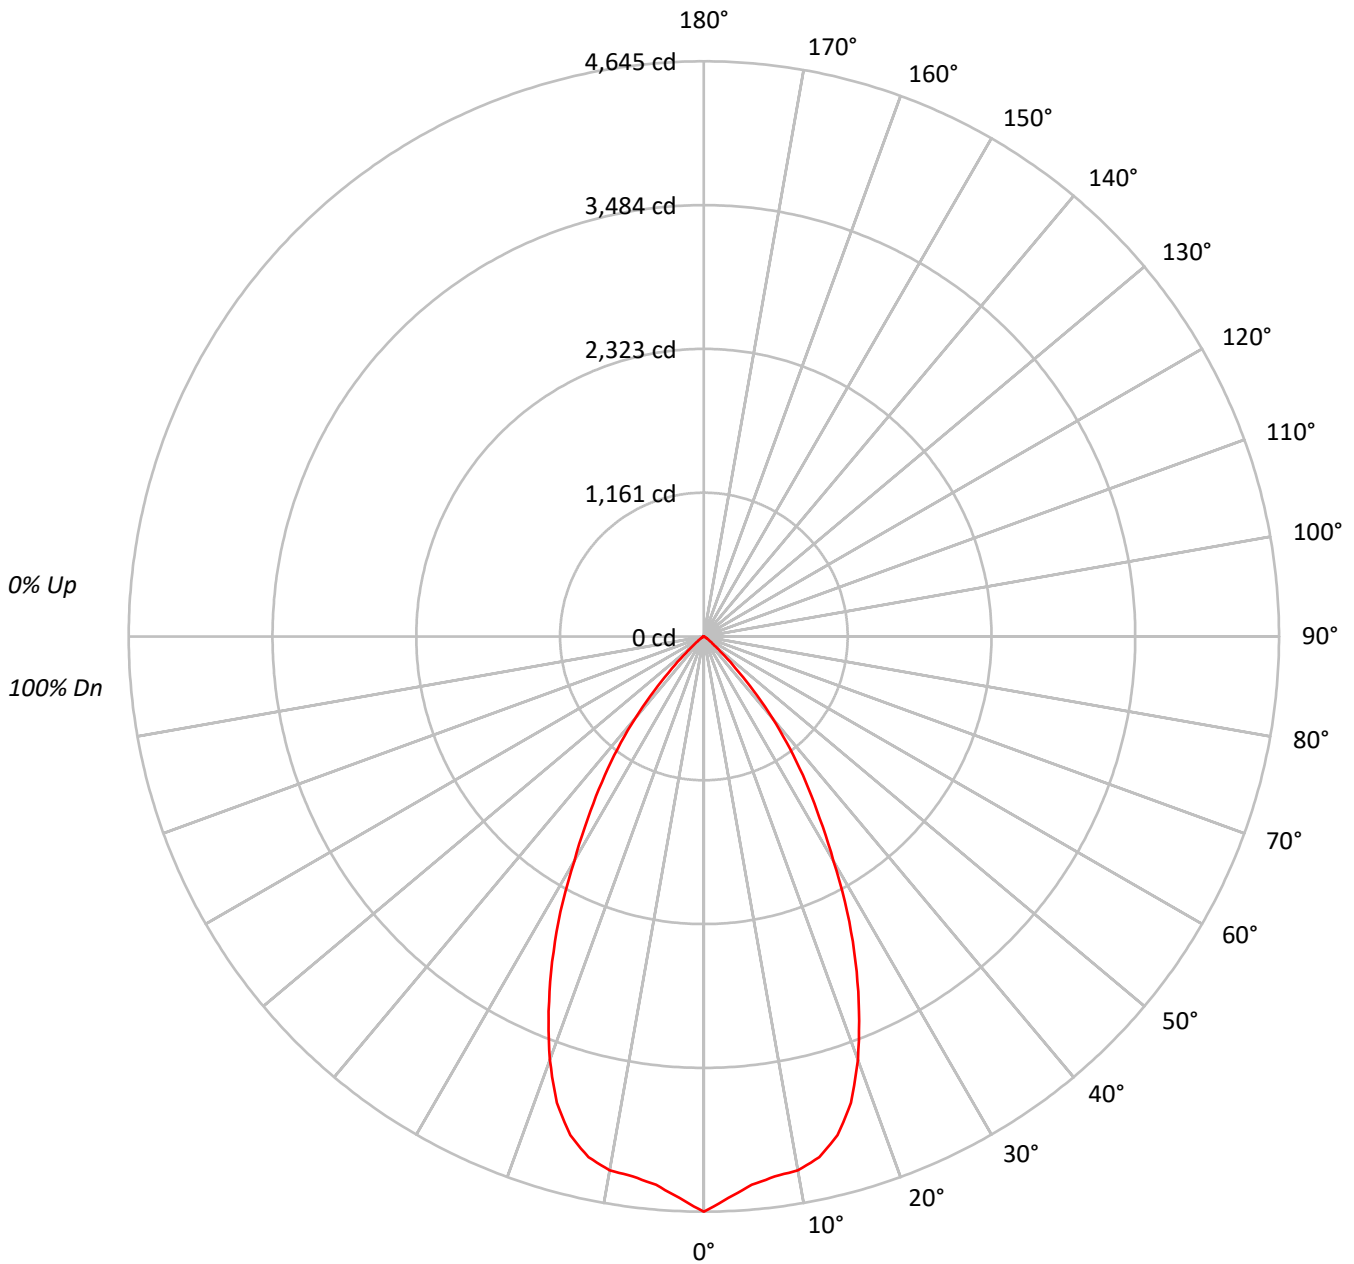



TEST NUMBER: P792088

CATALOG NUMBER: LER6D35BD010-EC6DR5520359050-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 99  | 98  | 97  | 96  | 95  | 94  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 108 | 103 | 99  | 96  | 106 | 101 | 98  | 95  | 98  | 95  | 92  | 95  | 93  | 90  | 92  | 90  | 89  | 87  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 102 | 96  | 91  | 87  | 100 | 95  | 90  | 86  | 92  | 88  | 85  | 90  | 86  | 84  | 87  | 85  | 82  | 81  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 97  | 90  | 84  | 80  | 95  | 88  | 83  | 79  | 86  | 82  | 78  | 84  | 81  | 78  | 82  | 79  | 77  | 75  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 92  | 84  | 78  | 74  | 91  | 83  | 77  | 73  | 81  | 76  | 73  | 79  | 75  | 72  | 78  | 74  | 71  | 70  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 88  | 79  | 73  | 68  | 86  | 78  | 72  | 68  | 76  | 71  | 68  | 75  | 70  | 67  | 74  | 70  | 67  | 65  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 83  | 74  | 68  | 64  | 82  | 73  | 67  | 63  | 72  | 67  | 63  | 71  | 66  | 63  | 70  | 65  | 62  | 61  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 79  | 69  | 63  | 59  | 78  | 69  | 63  | 59  | 68  | 63  | 59  | 67  | 62  | 59  | 66  | 62  | 58  | 57  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 75  | 66  | 60  | 56  | 74  | 65  | 59  | 55  | 64  | 59  | 55  | 63  | 58  | 55  | 62  | 58  | 55  | 54  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 72  | 62  | 56  | 52  | 71  | 61  | 56  | 52  | 61  | 56  | 52  | 60  | 55  | 52  | 59  | 55  | 52  | 50  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 507560 |
| 5°  | 487399 |
| 10° | 485556 |
| 15° | 471611 |
| 20° | 422873 |
| 25° | 349480 |
| 30° | 263984 |
| 35° | 191418 |
| 40° | 122490 |
| 45° | 55951  |
| 50° | 18290  |
| 55° | 7886   |
| 60° | 3387   |
| 65° | 440    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 55951 cd/sqm



TEST NUMBER: P792088

CATALOG NUMBER: LER6D35BD010-EC6DR5520359050-6LBDP1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 422.9  | 10.2      |
| 10°-20°   | 1154.1 | 27.9      |
| 20°-30°   | 1315.2 | 31.7      |
| 30°-40°   | 895.3  | 21.6      |
| 40°-50°   | 308.5  | 7.4       |
| 50°-60°   | 42.6   | 1.0       |
| 60°-70°   | 4.1    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 2892.1 | 69.8      |
| 0°-40°    | 3787.4 | 91.4      |
| 0°-60°    | 4138.5 | 99.9      |
| 0°-90°    | 4142.7 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 4142.7 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 4645 |      |
| 5°  | 4444 | 423  |
| 15° | 4169 | 1154 |
| 25° | 2899 | 1315 |
| 35° | 1435 | 895  |
| 45° | 362  | 309  |
| 55° | 41   | 43   |
| 65° | 2    | 4    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P792088

CATALOG NUMBER: LER6D35BD010-EC6DR5520359050-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 4645.4 |
| 2.5°  | 4538.9 |
| 5°    | 4443.9 |
| 7.5°  | 4397.3 |
| 10°   | 4376.5 |
| 12.5° | 4307.5 |
| 15°   | 4169.3 |
| 17.5° | 3950.0 |
| 20°   | 3636.9 |
| 22.5° | 3275.4 |
| 25°   | 2898.9 |
| 27.5° | 2506.9 |
| 30°   | 2092.4 |
| 32.5° | 1741.3 |
| 35°   | 1435.1 |
| 37.5° | 1143.8 |
| 40°   | 858.8  |
| 42.5° | 595.2  |
| 45°   | 362.1  |
| 47.5° | 195.1  |
| 50°   | 107.6  |
| 52.5° | 63.9   |
| 55°   | 41.4   |
| 57.5° | 26.5   |
| 60°   | 15.5   |
| 62.5° | 6.9    |
| 65°   | 1.7    |
| 67.5° | 0.6    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)