

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792129

Luminaire Tested: LER6D35BD010-EC6DR6020359040-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P792129
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D35BD010-EC6DR6020359040-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4235.6 lumens
Efficiency: N/A
Efficacy: 137.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792129

CATALOG NUMBER: LER6D35BD010-EC6DR6020359040-6LBDP1LI

Luminous Intensity Polar Plot

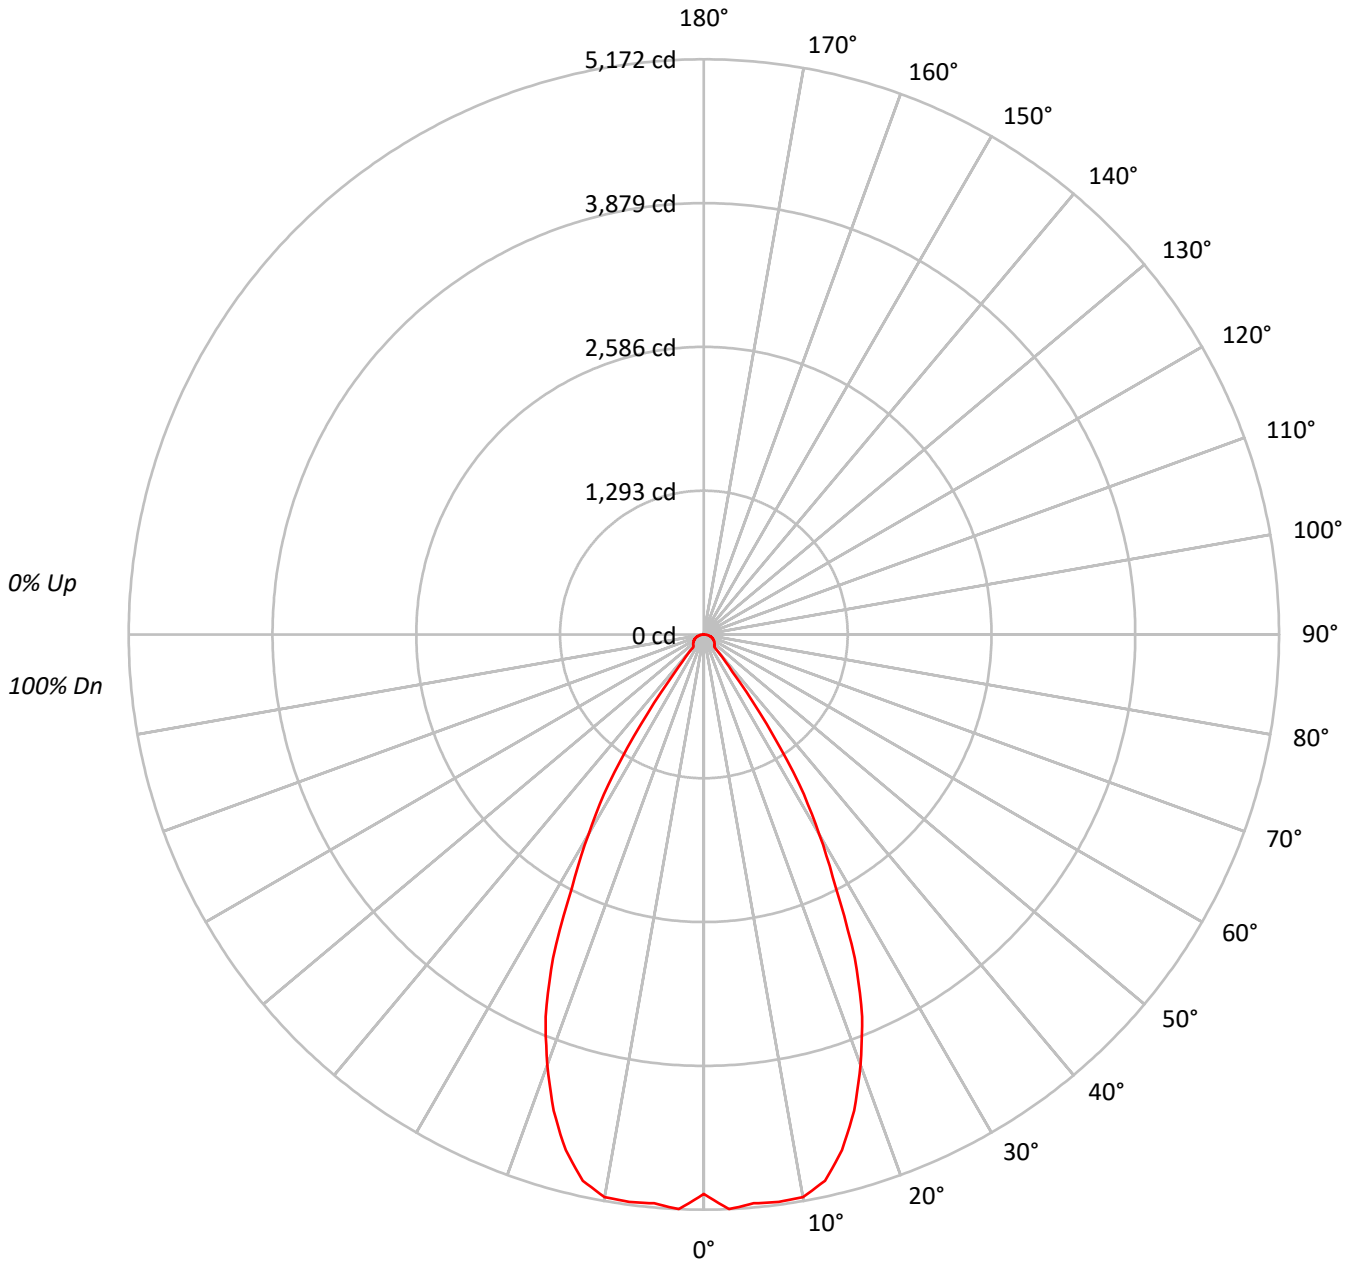



TEST NUMBER: P792129

CATALOG NUMBER: LER6D35BD010-EC6DR6020359040-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	549625
5°	563131
10°	569942
15°	542941
20°	478707
25°	387189
30°	261903
35°	131235
40°	21295
45°	20844
50°	21247
55°	21583
60°	22180
65°	22673
70°	23225
75°	23472
80°	22651
85°	18930

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 23472 cd/sqm



TEST NUMBER: P792129

CATALOG NUMBER: LER6D35BD010-EC6DR6020359040-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	490.7	11.6
10°-20°	1327.7	31.3
20°-30°	1428.5	33.7
30°-40°	620.9	14.7
40°-50°	104.3	2.5
50°-60°	101.4	2.4
60°-70°	86.7	2.0
70°-80°	58.0	1.4
80°-90°	17.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3246.9	76.7
0°-40°	3867.8	91.3
0°-60°	4073.5	96.2
0°-90°	4235.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4235.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5030	
5°	5134	491
15°	4800	1328
25°	3212	1428
35°	984	621
45°	135	104
55°	113	101
65°	88	87
75°	56	58
85°	15	17
90°	0	



TEST NUMBER: P792129

CATALOG NUMBER: LER6D35BD010-EC6DR6020359040-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	5030.4
2.5°	5171.8
5°	5134.4
7.5°	5146.2
10°	5137.1
12.5°	5031.0
15°	4799.9
17.5°	4489.6
20°	4117.1
22.5°	3718.4
25°	3211.7
27.5°	2568.9
30°	2075.9
32.5°	1600.0
35°	983.9
37.5°	420.9
40°	149.3
42.5°	137.5
45°	134.9
47.5°	130.3
50°	125.0
52.5°	119.1
55°	113.3
57.5°	107.4
60°	101.5
62.5°	94.9
65°	87.7
67.5°	80.5
70°	72.7
72.5°	64.2
75°	55.6
77.5°	45.8
80°	36.0
82.5°	25.5
85°	15.1
87.5°	5.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)