

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792136

Luminaire Tested: LER6D35BD010-EC6DR6020359050-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P792136
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D35BD010-EC6DR6020359050-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4062.8 lumens
Efficiency: N/A
Efficacy: 131.9 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792136

CATALOG NUMBER: LER6D35BD010-EC6DR6020359050-6LBDP1H

Luminous Intensity Polar Plot

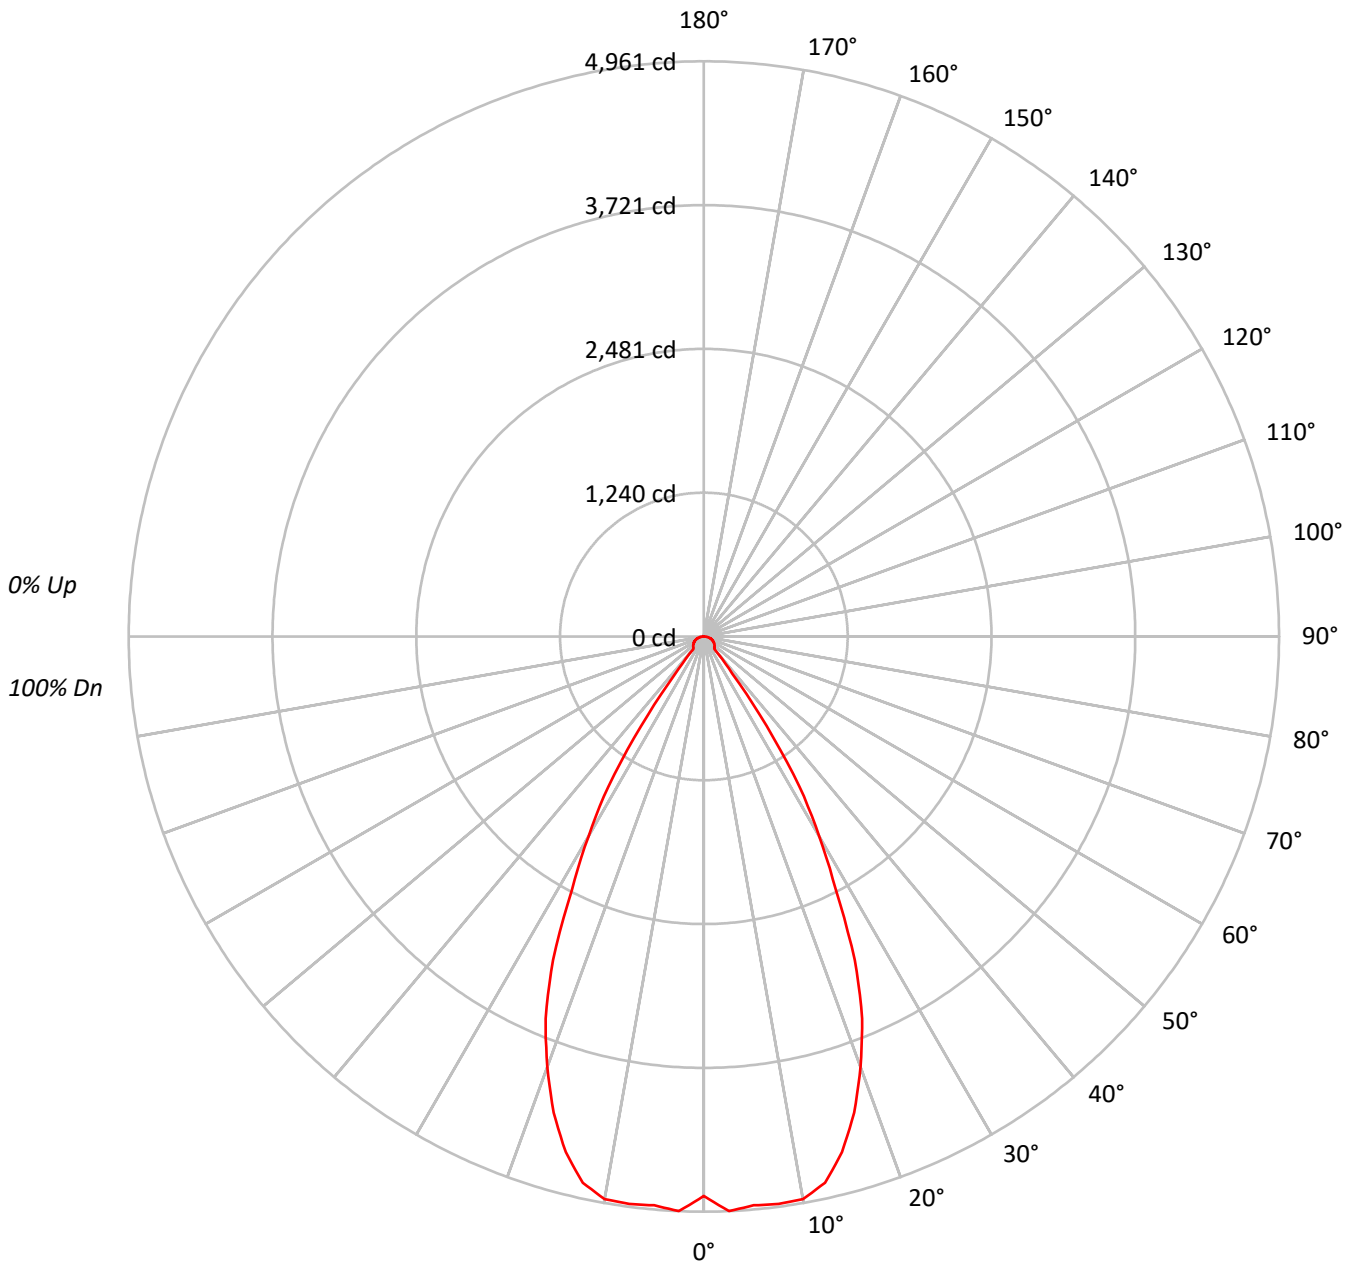



TEST NUMBER: P792136

CATALOG NUMBER: LER6D35BD010-EC6DR6020359050-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	527183
5°	540154
10°	546677
15°	520782
20°	459173
25°	371385
30°	251217
35°	125887
40°	20425
45°	19995
50°	20381
55°	20687
60°	21262
65°	21743
70°	22266
75°	22543
80°	21708
85°	18052

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 22543 cd/sqm



TEST NUMBER: P792136

CATALOG NUMBER: LER6D35BD010-EC6DR6020359050-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	470.7	11.6
10°-20°	1273.5	31.3
20°-30°	1370.2	33.7
30°-40°	595.6	14.7
40°-50°	100.1	2.5
50°-60°	97.3	2.4
60°-70°	83.2	2.0
70°-80°	55.7	1.4
80°-90°	16.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3114.4	76.7
0°-40°	3710.0	91.3
0°-60°	3907.3	96.2
0°-90°	4062.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4062.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4825	
5°	4925	471
15°	4604	1273
25°	3081	1370
35°	944	596
45°	129	100
55°	109	97
65°	84	83
75°	53	56
85°	14	17
90°	0	



TEST NUMBER: P792136

CATALOG NUMBER: LER6D35BD010-EC6DR6020359050-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	4825.0
2.5°	4960.7
5°	4924.9
7.5°	4936.2
10°	4927.4
12.5°	4825.7
15°	4604.0
17.5°	4306.4
20°	3949.1
22.5°	3566.7
25°	3080.6
27.5°	2464.0
30°	1991.2
32.5°	1534.7
35°	943.8
37.5°	403.8
40°	143.2
42.5°	131.9
45°	129.4
47.5°	125.0
50°	119.9
52.5°	114.3
55°	108.6
57.5°	103.0
60°	97.3
62.5°	91.1
65°	84.1
67.5°	77.2
70°	69.7
72.5°	61.5
75°	53.4
77.5°	44.0
80°	34.5
82.5°	24.5
85°	14.4
87.5°	5.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)