

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792151

Luminaire Tested: LER6D35BD010-EC6DR6520359027-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P792151
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D35BD010-EC6DR6520359027-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2409.3 lumens
Efficiency: N/A
Efficacy: 78.2 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792151

CATALOG NUMBER: LER6D35BD010-EC6DR6520359027-6LBDP1B

Luminous Intensity Polar Plot

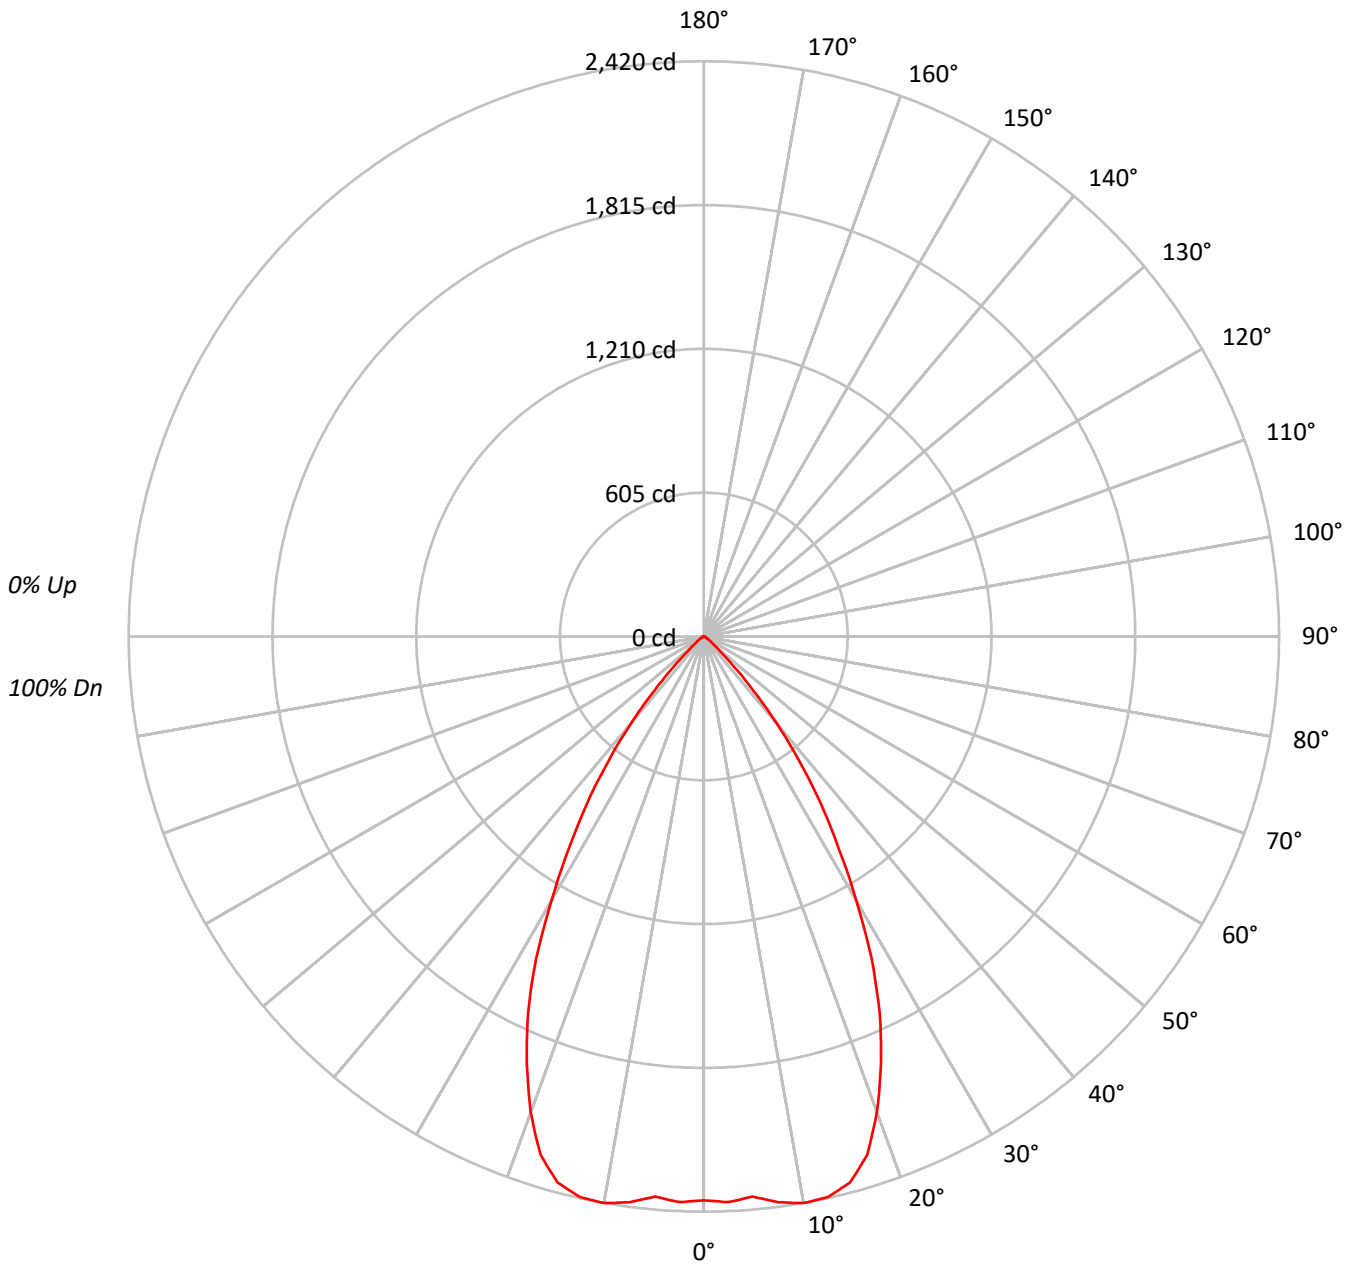



TEST NUMBER: P792151

CATALOG NUMBER: LER6D35BD010-EC6DR6520359027-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	259177
5°	259400
10°	268534
15°	268976
20°	247638
25°	210997
30°	161527
35°	114122
40°	67364
45°	27350
50°	9910
55°	5524
60°	3169
65°	1732
70°	1821
75°	1435
80°	1510
85°	1254

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 27350 cd/sqm



TEST NUMBER: P792151

CATALOG NUMBER: LER6D35BD010-EC6DR6520359027-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	228.4	9.5
10°-20°	658.9	27.3
20°-30°	790.5	32.8
30°-40°	531.3	22.1
40°-50°	159.0	6.6
50°-60°	28.1	1.2
60°-70°	8.0	0.3
70°-80°	3.9	0.2
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1677.8	69.6
0°-40°	2209.1	91.7
0°-60°	2396.2	99.5
0°-90°	2409.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2409.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2372	
5°	2365	228
15°	2378	659
25°	1750	791
35°	856	531
45°	177	159
55°	29	28
65°	7	8
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P792151

CATALOG NUMBER: LER6D35BD010-EC6DR6520359027-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	2372.1
2.5°	2382.3
5°	2365.1
7.5°	2400.8
10°	2420.4
12.5°	2415.6
15°	2377.9
17.5°	2285.5
20°	2129.8
22.5°	1946.4
25°	1750.2
27.5°	1528.7
30°	1280.3
32.5°	1055.1
35°	855.6
37.5°	658.3
40°	472.3
42.5°	308.4
45°	177.0
47.5°	93.7
50°	58.3
52.5°	40.5
55°	29.0
57.5°	20.9
60°	14.5
62.5°	9.4
65°	6.7
67.5°	6.1
70°	5.7
72.5°	4.4
75°	3.4
77.5°	3.0
80°	2.4
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)