

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792170

Luminaire Tested: LER6D35BD010-EC6DR6520359035-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P792170  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D35BD010-EC6DR6520359035-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2905.3 lumens  
Efficiency: N/A  
Efficacy: 94.3 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P792170

CATALOG NUMBER: LER6D35BD010-EC6DR6520359035-6LBDP1MW

### Luminous Intensity Polar Plot

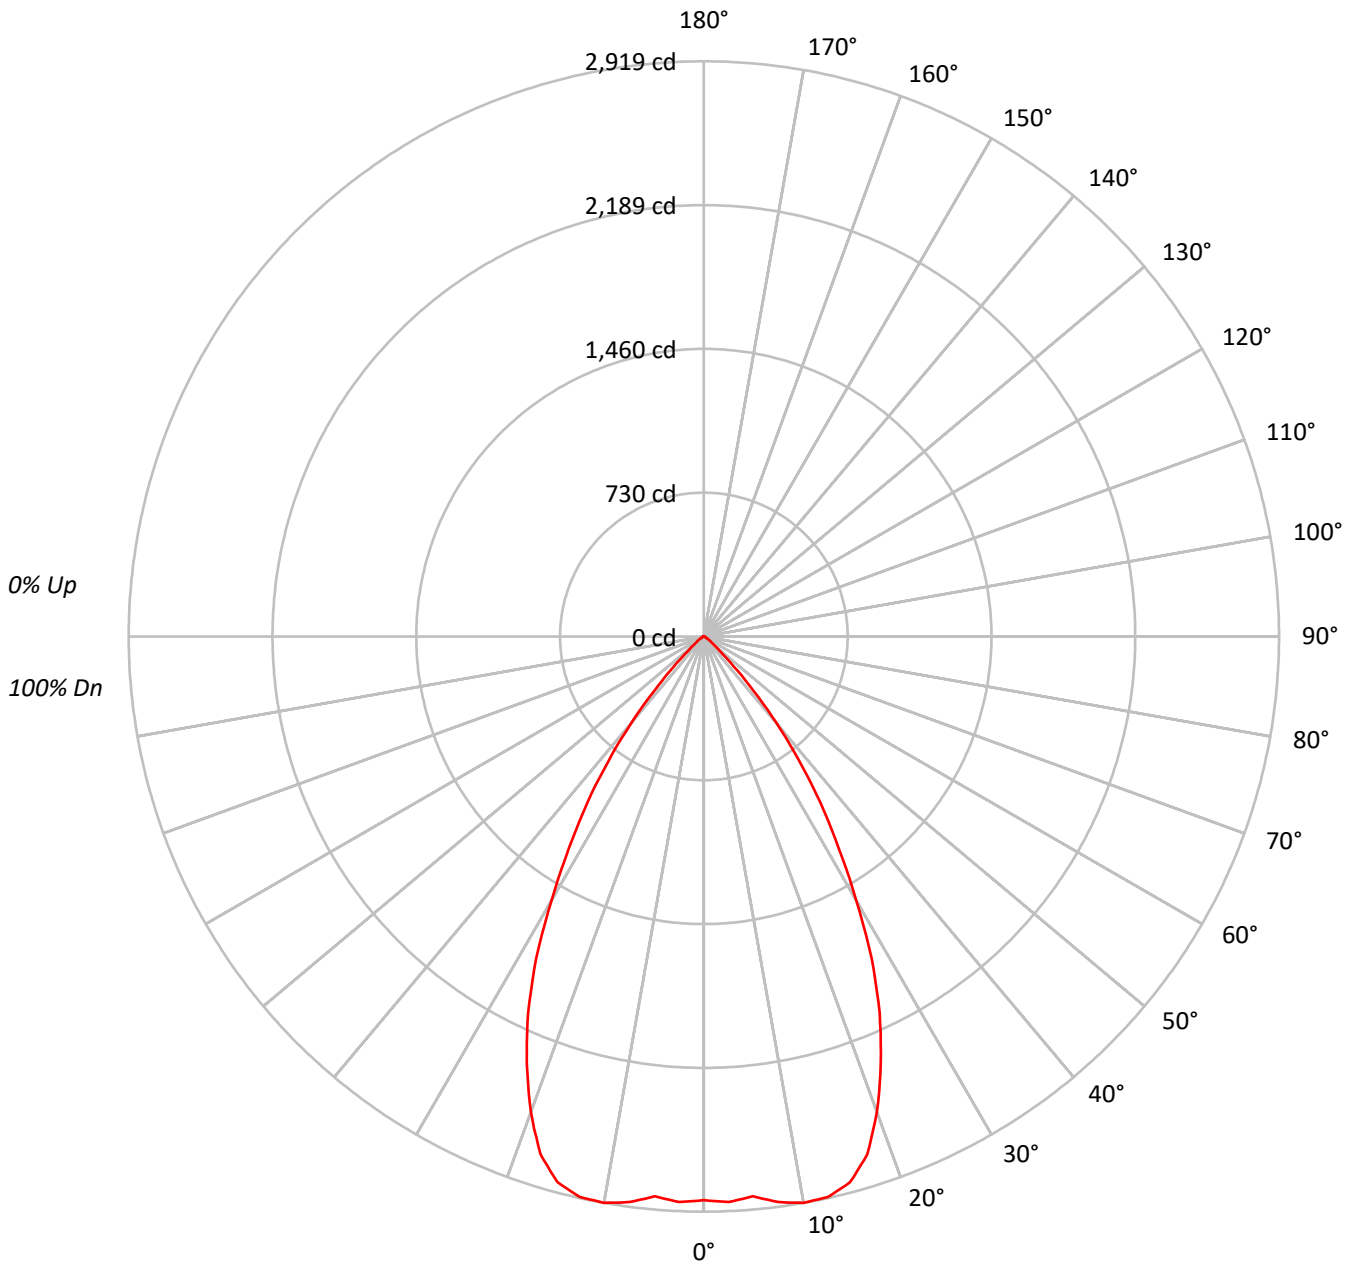



TEST NUMBER: P792170

CATALOG NUMBER: LER6D35BD010-EC6DR6520359035-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	312540
5°	312791
10°	323808
15°	324346
20°	298612
25°	254433
30°	194771
35°	137611
40°	81228
45°	32974
50°	11950
55°	6667
60°	3824
65°	2094
70°	2204
75°	1731
80°	1762
85°	1504

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 32974 cd/sqm



TEST NUMBER: P792170

CATALOG NUMBER: LER6D35BD010-EC6DR6520359035-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	275.4	9.5
10°-20°	794.5	27.3
20°-30°	953.3	32.8
30°-40°	640.6	22.1
40°-50°	191.8	6.6
50°-60°	33.9	1.2
60°-70°	9.6	0.3
70°-80°	4.7	0.2
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2023.2	69.6
0°-40°	2663.8	91.7
0°-60°	2889.5	99.5
0°-90°	2905.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2905.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2860	
5°	2852	275
15°	2867	795
25°	2110	953
35°	1032	641
45°	213	192
55°	35	34
65°	8	10
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P792170

CATALOG NUMBER: LER6D35BD010-EC6DR6520359035-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2860.5
2.5°	2872.7
5°	2851.9
7.5°	2895.0
10°	2918.6
12.5°	2912.9
15°	2867.4
17.5°	2756.0
20°	2568.2
22.5°	2347.1
25°	2110.5
27.5°	1843.4
30°	1543.8
32.5°	1272.3
35°	1031.7
37.5°	793.9
40°	569.5
42.5°	371.9
45°	213.4
47.5°	113.0
50°	70.3
52.5°	48.8
55°	35.0
57.5°	25.2
60°	17.5
62.5°	11.4
65°	8.1
67.5°	7.3
70°	6.9
72.5°	5.3
75°	4.1
77.5°	3.7
80°	2.8
82.5°	2.0
85°	1.2
87.5°	0.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)