

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792194

Luminaire Tested: LER6D35BD010-EC6DR7020359024-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P792194
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D35BD010-EC6DR7020359024-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2569.2 lumens
Efficiency: N/A
Efficacy: 83.4 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792194

CATALOG NUMBER: LER6D35BD010-EC6DR7020359024-6LBDP1MW

Luminous Intensity Polar Plot

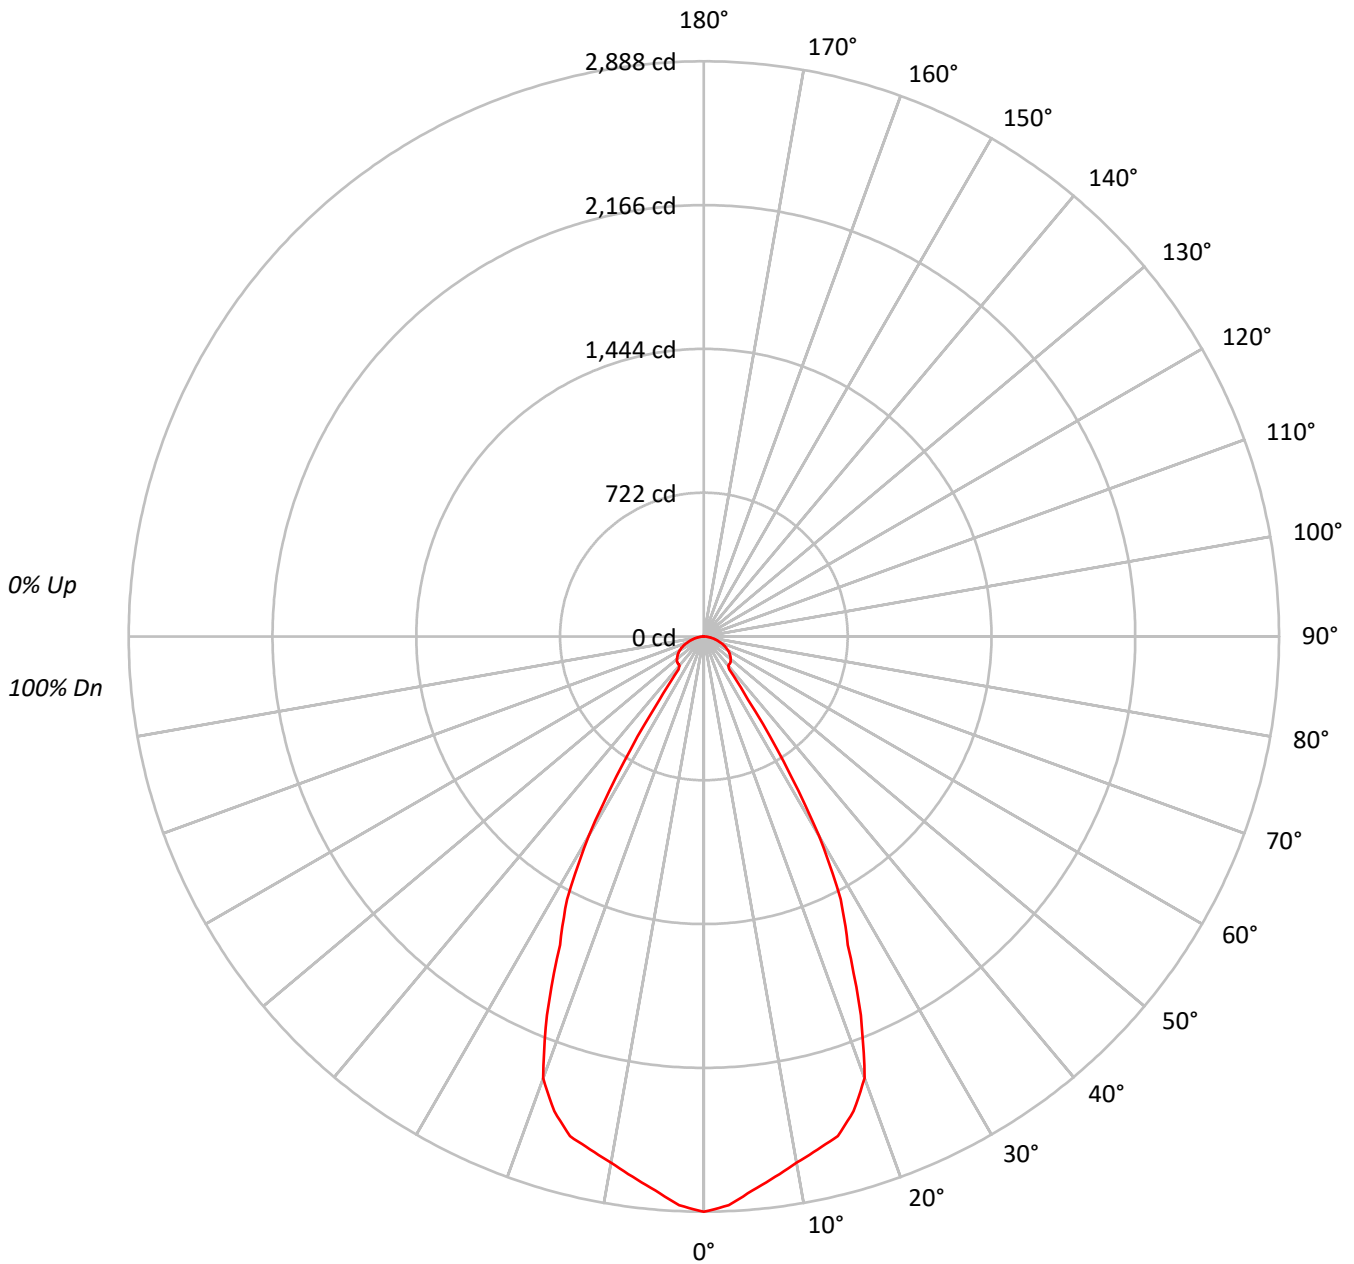



TEST NUMBER: P792194

CATALOG NUMBER: LER6D35BD010-EC6DR7020359024-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			83
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			76
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			70
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65			65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			53
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			50
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	315600
5°	306221
10°	297691
15°	293782
20°	274334
25°	206090
30°	145694
35°	51606
40°	27142
45°	28910
50°	29933
55°	30497
60°	30680
65°	30042
70°	28336
75°	26258
80°	23281
85°	18930

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 30686 cd/sqm



TEST NUMBER: P792194

CATALOG NUMBER: LER6D35BD010-EC6DR7020359024-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	263.3	10.3
10°-20°	722.4	28.1
20°-30°	795.6	31.0
30°-40°	304.0	11.8
40°-50°	143.5	5.6
50°-60°	142.7	5.6
60°-70°	114.2	4.4
70°-80°	65.6	2.6
80°-90°	17.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1781.3	69.3
0°-40°	2085.3	81.2
0°-60°	2371.5	92.3
0°-90°	2569.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2569.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2888	
5°	2792	263
15°	2597	722
25°	1710	796
35°	387	304
45°	187	144
55°	160	143
65°	116	114
75°	62	66
85°	15	18
90°	0	



TEST NUMBER: P792194

CATALOG NUMBER: LER6D35BD010-EC6DR7020359024-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2888.5
2.5°	2858.4
5°	2792.0
7.5°	2736.7
10°	2683.2
12.5°	2637.9
15°	2597.2
17.5°	2498.9
20°	2359.4
22.5°	2058.5
25°	1709.5
27.5°	1488.2
30°	1154.8
32.5°	745.9
35°	386.9
37.5°	209.0
40°	190.3
42.5°	188.9
45°	187.1
47.5°	182.9
50°	176.1
52.5°	168.3
55°	160.1
57.5°	150.9
60°	140.4
62.5°	128.5
65°	116.2
67.5°	102.4
70°	88.7
72.5°	75.0
75°	62.2
77.5°	48.9
80°	37.0
82.5°	26.1
85°	15.1
87.5°	5.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)