

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792204

Luminaire Tested: LER6D35BD010-EC6DR7020359027-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P792204  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D35BD010-EC6DR7020359027-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3922.1 lumens  
Efficiency: N/A  
Efficacy: 127.3 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P792204  
CATALOG NUMBER: LER6D35BD010-EC6DR7020359027-6LBS1H

### Luminous Intensity Polar Plot

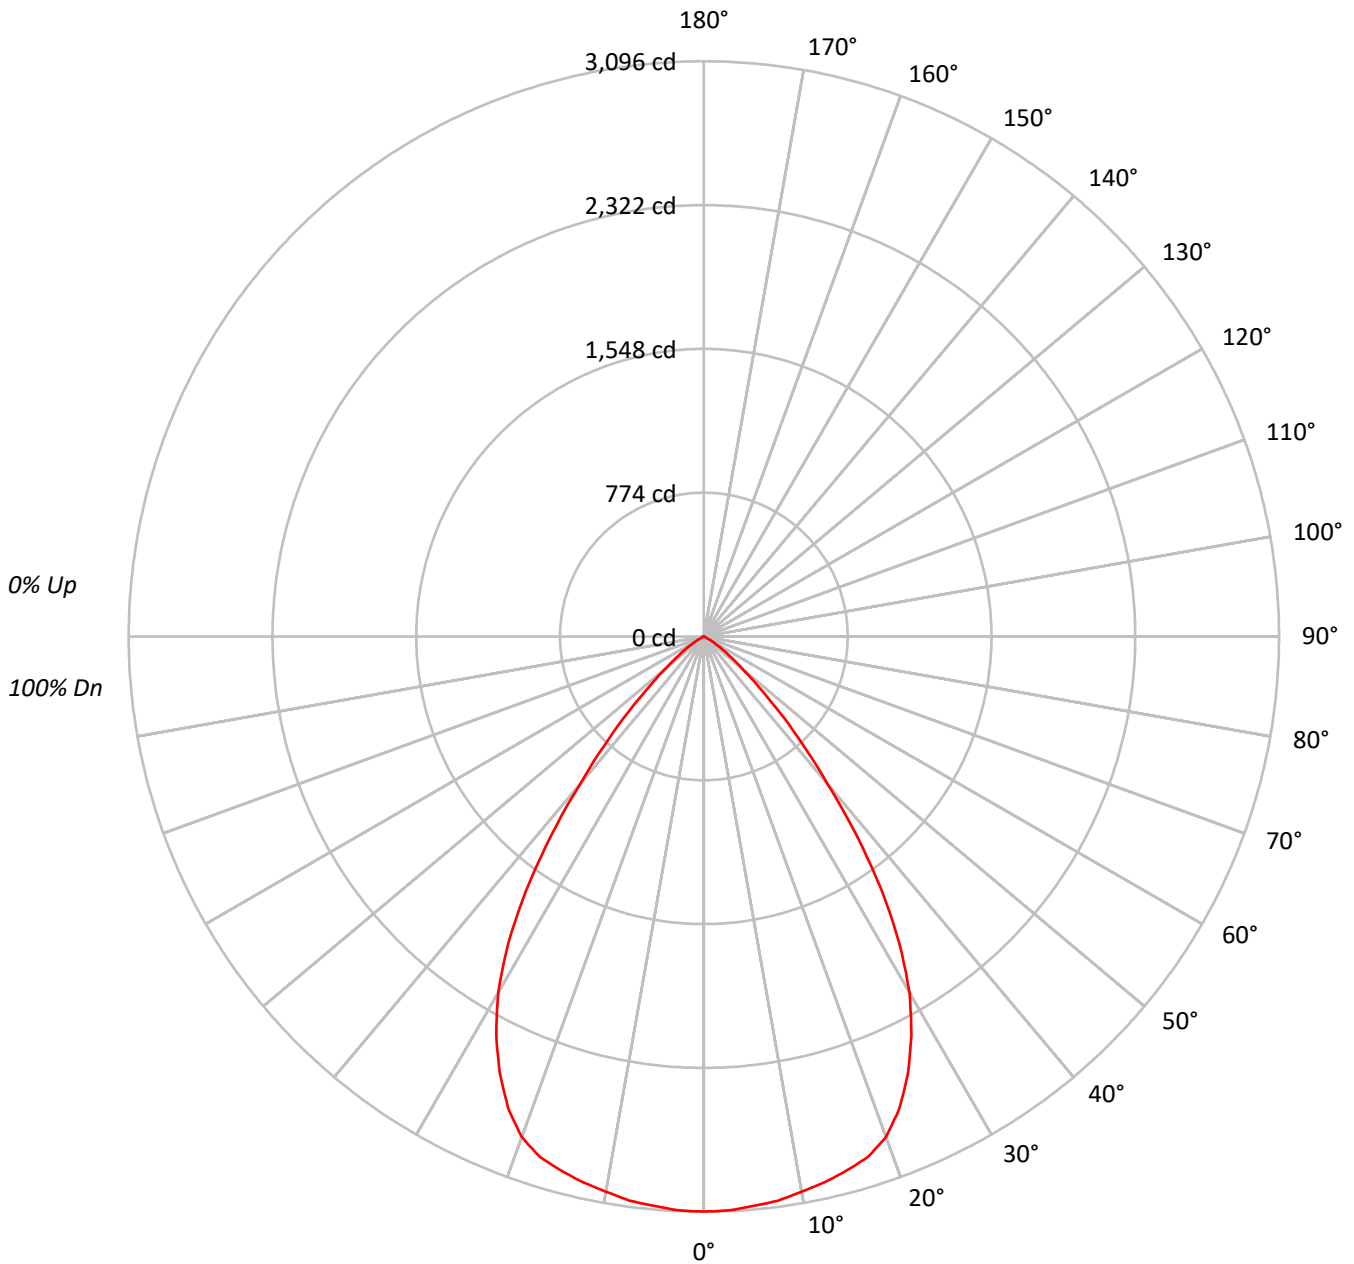



TEST NUMBER: P792204

CATALOG NUMBER: LER6D35BD010-EC6DR7020359027-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78			78																
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71			71																
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65			65																
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60			60																
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56			56																
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51			51																
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48			48																
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44			44																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	338239
5°	337392
10°	336655
15°	336563
20°	333273
25°	313072
30°	279099
35°	222536
40°	147764
45°	88338
50°	45792
55°	24078
60°	8522
65°	155
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 88338 cd/sqm



TEST NUMBER: P792204

CATALOG NUMBER: LER6D35BD010-EC6DR7020359027-6LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	292.5	7.5
10°-20°	839.0	21.4
20°-30°	1183.6	30.2
30°-40°	1021.8	26.1
40°-50°	457.6	11.7
50°-60°	119.8	3.1
60°-70°	7.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2315.2	59.0
0°-40°	3336.9	85.1
0°-60°	3914.3	99.8
0°-90°	3922.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3922.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3096	
5°	3076	293
15°	2975	839
25°	2597	1184
35°	1668	1022
45°	572	458
55°	126	120
65°	1	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P792204

CATALOG NUMBER: LER6D35BD010-EC6DR7020359027-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3095.7
2.5°	3092.3
5°	3076.2
7.5°	3062.8
10°	3034.4
12.5°	3008.8
15°	2975.4
17.5°	2937.0
20°	2866.3
22.5°	2750.0
25°	2596.9
27.5°	2419.3
30°	2212.2
32.5°	1958.9
35°	1668.4
37.5°	1347.7
40°	1036.0
42.5°	787.1
45°	571.7
47.5°	394.1
50°	269.4
52.5°	185.9
55°	126.4
57.5°	76.3
60°	39.0
62.5°	12.2
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)