

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792217

Luminaire Tested: LER6D35BD010-EC6DR7020359035-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P792217
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D35BD010-EC6DR7020359035-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4073.0 lumens
Efficiency: N/A
Efficacy: 132.2 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792217

CATALOG NUMBER: LER6D35BD010-EC6DR7020359035-6LBDP1LI

Luminous Intensity Polar Plot

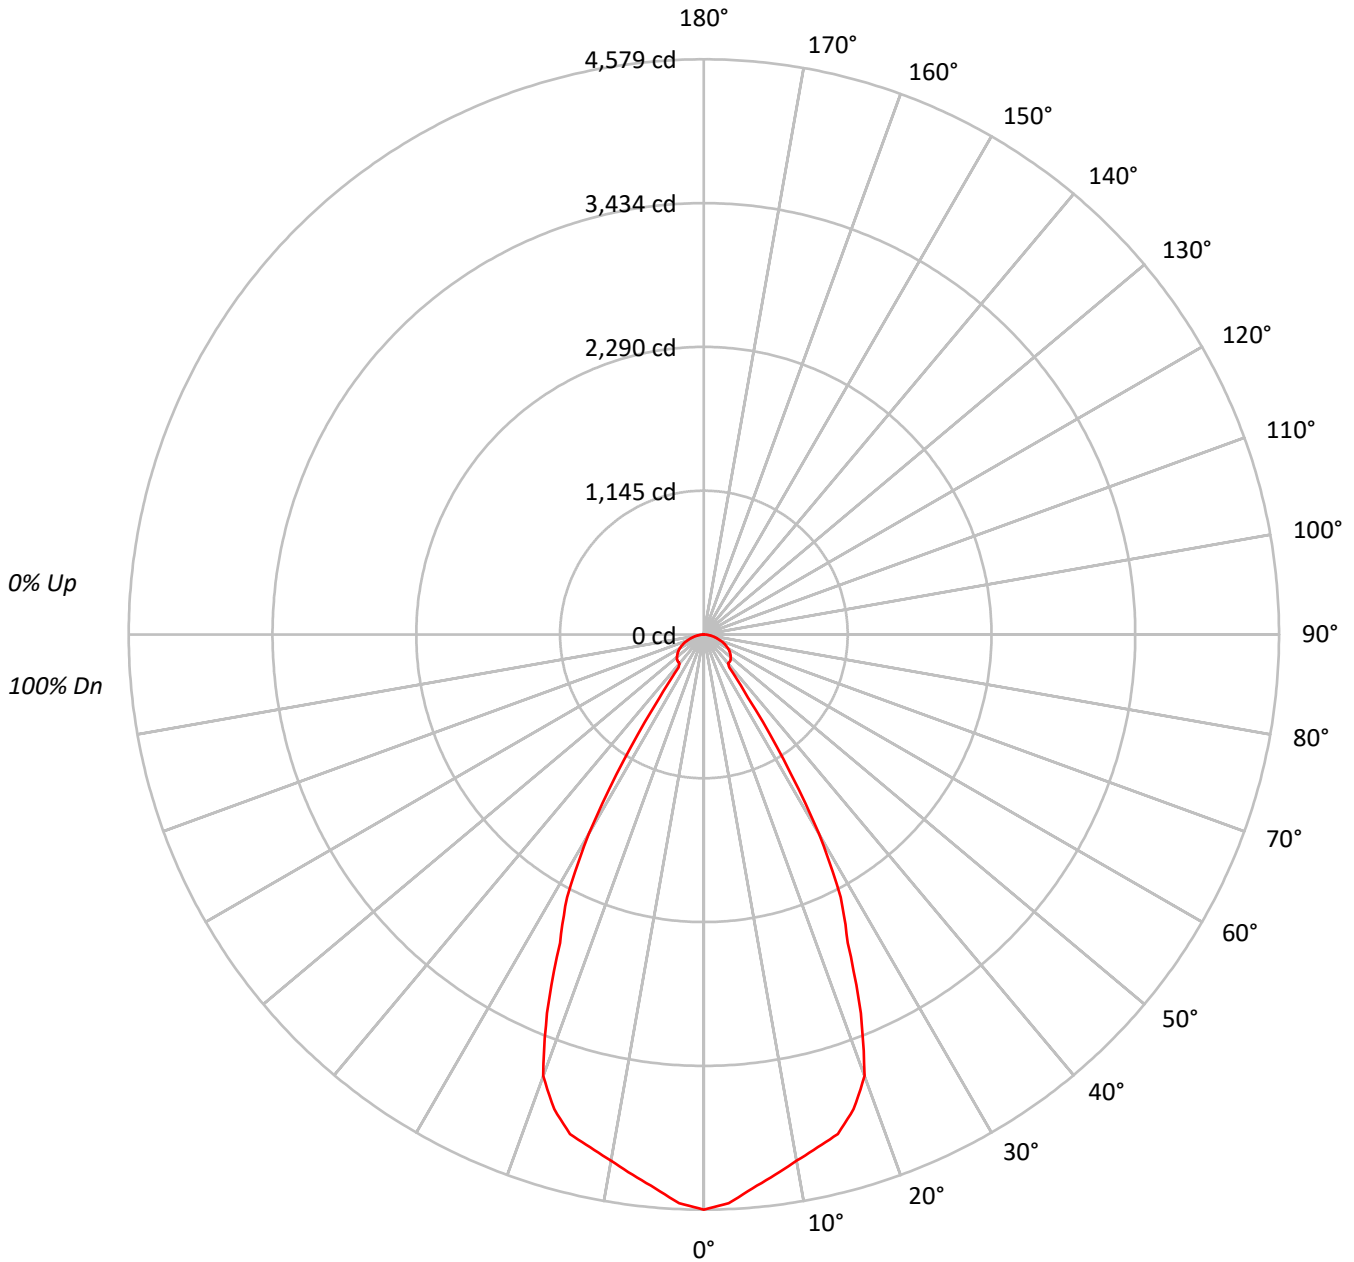



TEST NUMBER: P792217

CATALOG NUMBER: LER6D35BD010-EC6DR7020359035-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	500327
5°	485457
10°	471932
15°	465740
20°	434907
25°	326719
30°	230967
35°	81817
40°	43017
45°	45815
50°	47441
55°	48346
60°	48643
65°	47622
70°	44948
75°	41624
80°	36934
85°	29962

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 48662 cd/sqm



TEST NUMBER: P792217

CATALOG NUMBER: LER6D35BD010-EC6DR7020359035-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	417.5	10.3
10°-20°	1145.2	28.1
20°-30°	1261.2	31.0
30°-40°	481.9	11.8
40°-50°	227.5	5.6
50°-60°	226.2	5.6
60°-70°	181.1	4.4
70°-80°	104.1	2.6
80°-90°	28.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2823.9	69.3
0°-40°	3305.8	81.2
0°-60°	3759.5	92.3
0°-90°	4073.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4073.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4579	
5°	4426	417
15°	4117	1145
25°	2710	1261
35°	613	482
45°	296	228
55°	254	226
65°	184	181
75°	99	104
85°	24	28
90°	0	



TEST NUMBER: P792217

CATALOG NUMBER: LER6D35BD010-EC6DR7020359035-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4579.2
2.5°	4531.4
5°	4426.2
7.5°	4338.5
10°	4253.7
12.5°	4181.9
15°	4117.4
17.5°	3961.5
20°	3740.4
22.5°	3263.3
25°	2710.1
27.5°	2359.2
30°	1830.7
32.5°	1182.5
35°	613.4
37.5°	331.3
40°	301.6
42.5°	299.4
45°	296.5
47.5°	290.0
50°	279.1
52.5°	266.8
55°	253.8
57.5°	239.3
60°	222.6
62.5°	203.7
65°	184.2
67.5°	162.4
70°	140.7
72.5°	118.9
75°	98.6
77.5°	77.6
80°	58.7
82.5°	41.3
85°	23.9
87.5°	9.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)