

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792257

Luminaire Tested: LER6D40BD010-EC6DR2540509030-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P792257  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D40BD010-EC6DR2540509030-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4200.1 lumens  
Efficiency: N/A  
Efficacy: 119.3 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 35.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P792257

CATALOG NUMBER: LER6D40BD010-EC6DR2540509030-6LBDP1LI

### Luminous Intensity Polar Plot

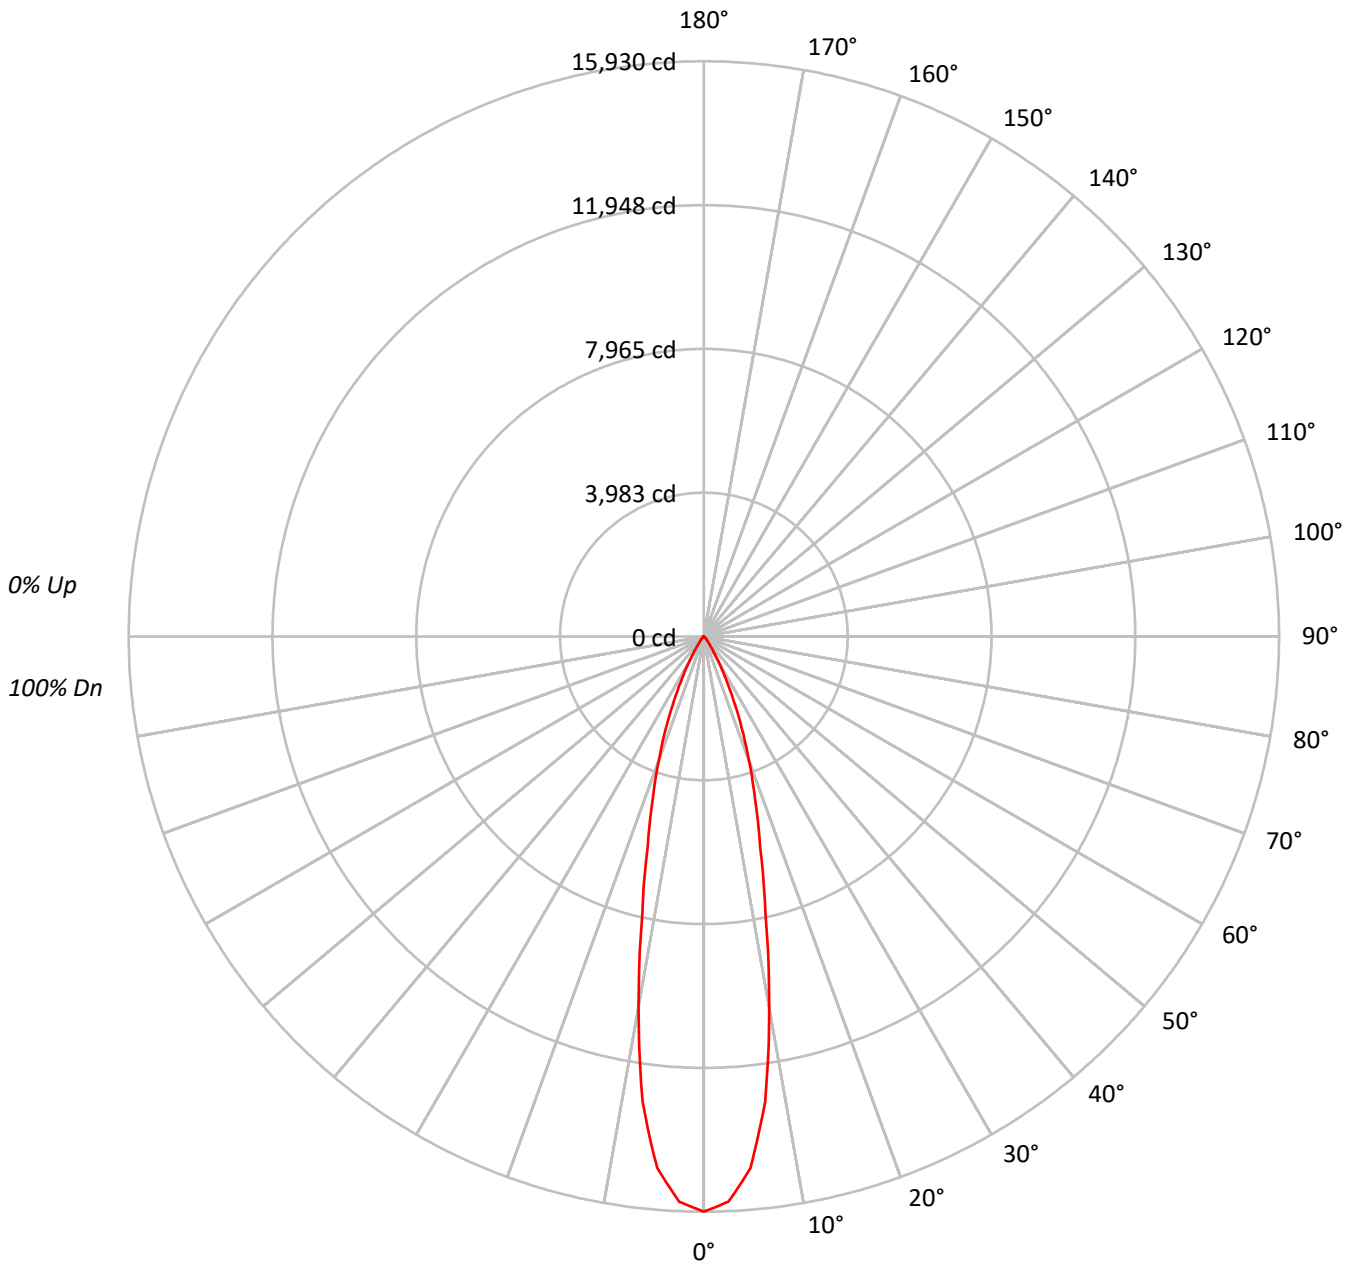



TEST NUMBER: P792257

CATALOG NUMBER: LER6D40BD010-EC6DR2540509030-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89			
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85			
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79			
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1740480
5°	1621032
10°	1156326
15°	681032
20°	423745
25°	232552
30°	106356
35°	40282
40°	18242
45°	10971
50°	4555
55°	2934
60°	2054
65°	1396
70°	224
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 10971 cd/sqm



TEST NUMBER: P792257

CATALOG NUMBER: LER6D40BD010-EC6DR2540509030-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1270.2	30.2
10°-20°	1720.4	41.0
20°-30°	910.4	21.7
30°-40°	224.8	5.4
40°-50°	54.9	1.3
50°-60°	14.4	0.3
60°-70°	4.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3901.1	92.9
0°-40°	4125.8	98.2
0°-60°	4195.1	99.9
0°-90°	4200.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4200.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15930	
5°	14780	###
15°	6021	1720
25°	1929	910
35°	302	225
45°	71	55
55°	15	14
65°	5	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P792257

CATALOG NUMBER: LER6D40BD010-EC6DR2540509030-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	15929.6
2.5°	15667.8
5°	14779.9
7.5°	12996.2
10°	10422.4
12.5°	7878.8
15°	6020.7
17.5°	4692.3
20°	3644.4
22.5°	2733.2
25°	1929.0
27.5°	1293.6
30°	843.0
32.5°	512.9
35°	302.0
37.5°	184.8
40°	127.9
42.5°	97.8
45°	71.0
47.5°	42.9
50°	26.8
52.5°	19.4
55°	15.4
57.5°	12.1
60°	9.4
62.5°	7.4
65°	5.4
67.5°	2.0
70°	0.7
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)