

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792674

Luminaire Tested: LER6D40BD010-EC6DR7040509024-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P792674  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D40BD010-EC6DR7040509024-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3024.5 lumens  
Efficiency: N/A  
Efficacy: 85.9 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 35.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P792674

CATALOG NUMBER: LER6D40BD010-EC6DR7040509024-6LBDP1MW

### Luminous Intensity Polar Plot

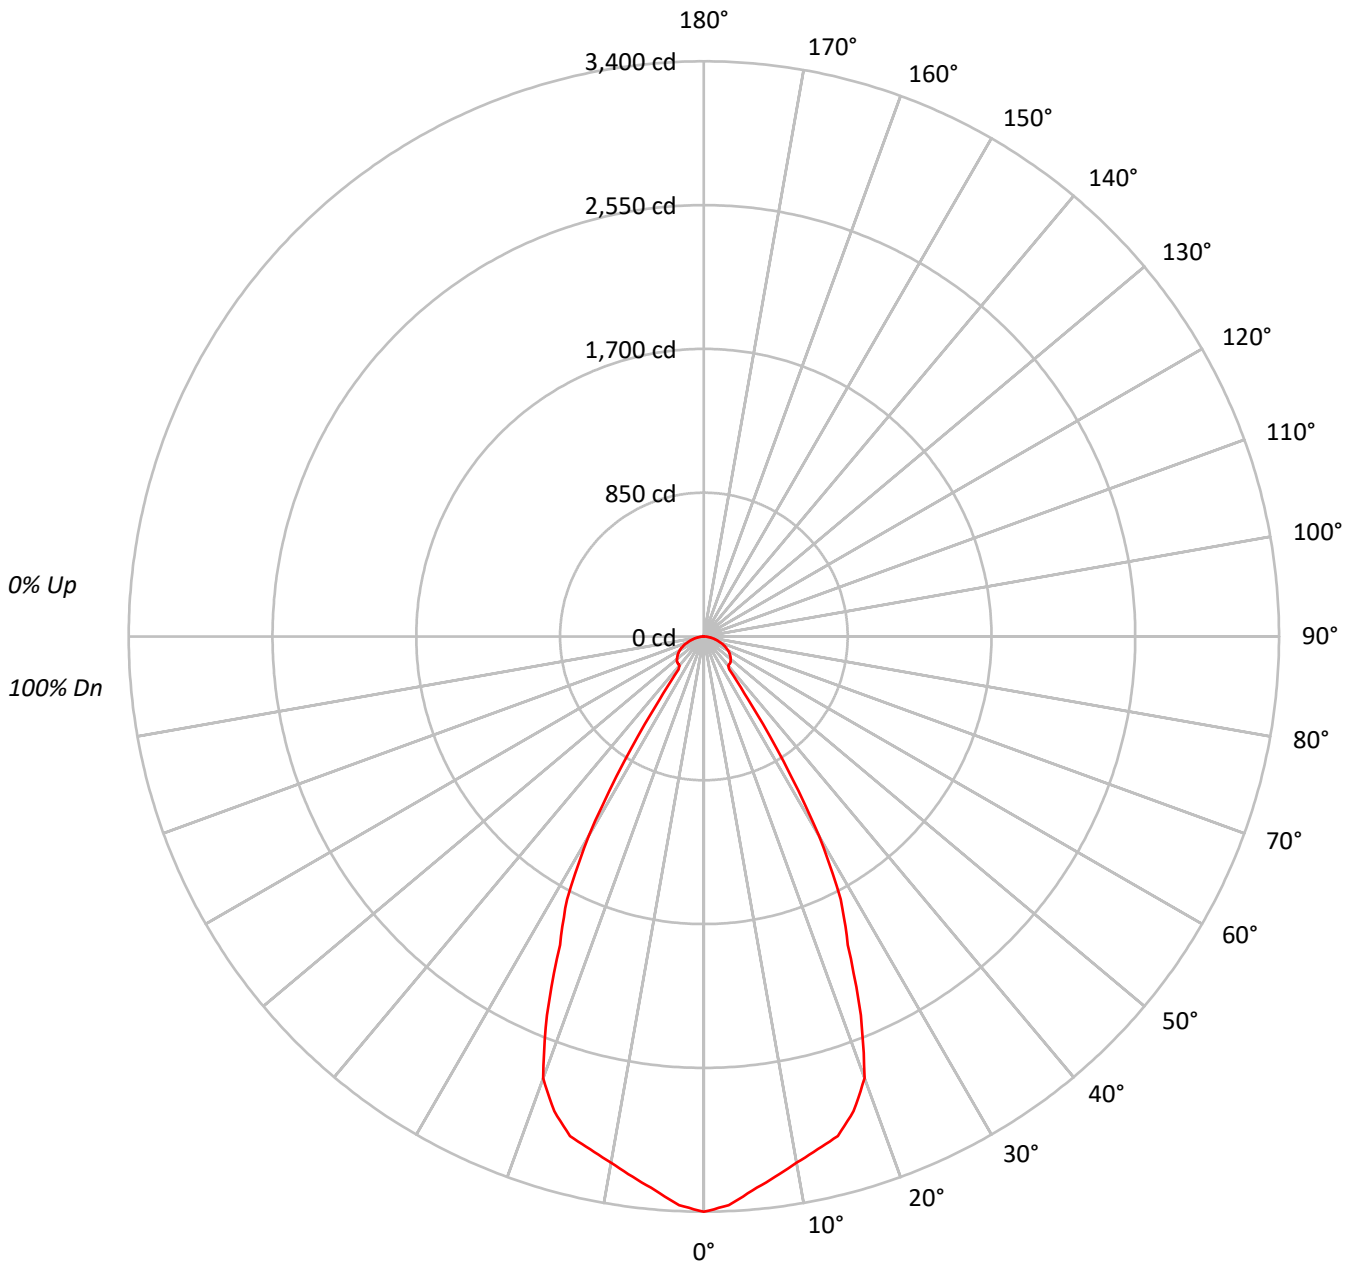



TEST NUMBER: P792674

CATALOG NUMBER: LER6D40BD010-EC6DR7040509024-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	371530
5°	360490
10°	350446
15°	345849
20°	322948
25°	242619
30°	171507
35°	60756
40°	31949
45°	34025
50°	35237
55°	35888
60°	36122
65°	35341
70°	33351
75°	30901
80°	27433
85°	22315

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 36136 cd/sqm



TEST NUMBER: P792674

CATALOG NUMBER: LER6D40BD010-EC6DR7040509024-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	310.0	10.3
10°-20°	850.4	28.1
20°-30°	936.6	31.0
30°-40°	357.8	11.8
40°-50°	169.0	5.6
50°-60°	168.0	5.6
60°-70°	134.5	4.4
70°-80°	77.3	2.6
80°-90°	21.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2097.0	69.3
0°-40°	2454.8	81.2
0°-60°	2791.7	92.3
0°-90°	3024.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3024.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3400	
5°	3287	310
15°	3058	850
25°	2012	937
35°	456	358
45°	220	169
55°	188	168
65°	137	134
75°	73	77
85°	18	21
90°	0	



TEST NUMBER: P792674

CATALOG NUMBER: LER6D40BD010-EC6DR7040509024-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3400.4
2.5°	3364.9
5°	3286.8
7.5°	3221.7
10°	3158.7
12.5°	3105.4
15°	3057.5
17.5°	2941.7
20°	2777.5
22.5°	2423.3
25°	2012.5
27.5°	1751.9
30°	1359.4
32.5°	878.1
35°	455.5
37.5°	246.0
40°	224.0
42.5°	222.4
45°	220.2
47.5°	215.4
50°	207.3
52.5°	198.1
55°	188.4
57.5°	177.7
60°	165.3
62.5°	151.3
65°	136.7
67.5°	120.6
70°	104.4
72.5°	88.3
75°	73.2
77.5°	57.6
80°	43.6
82.5°	30.7
85°	17.8
87.5°	7.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)