

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792681

Luminaire Tested: LER6D40BD010-EC6DR7040509027-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P792681
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D40BD010-EC6DR7040509027-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4605.6 lumens
Efficiency: N/A
Efficacy: 130.8 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792681

CATALOG NUMBER: LER6D40BD010-EC6DR7040509027-6LBDP1LI

Luminous Intensity Polar Plot

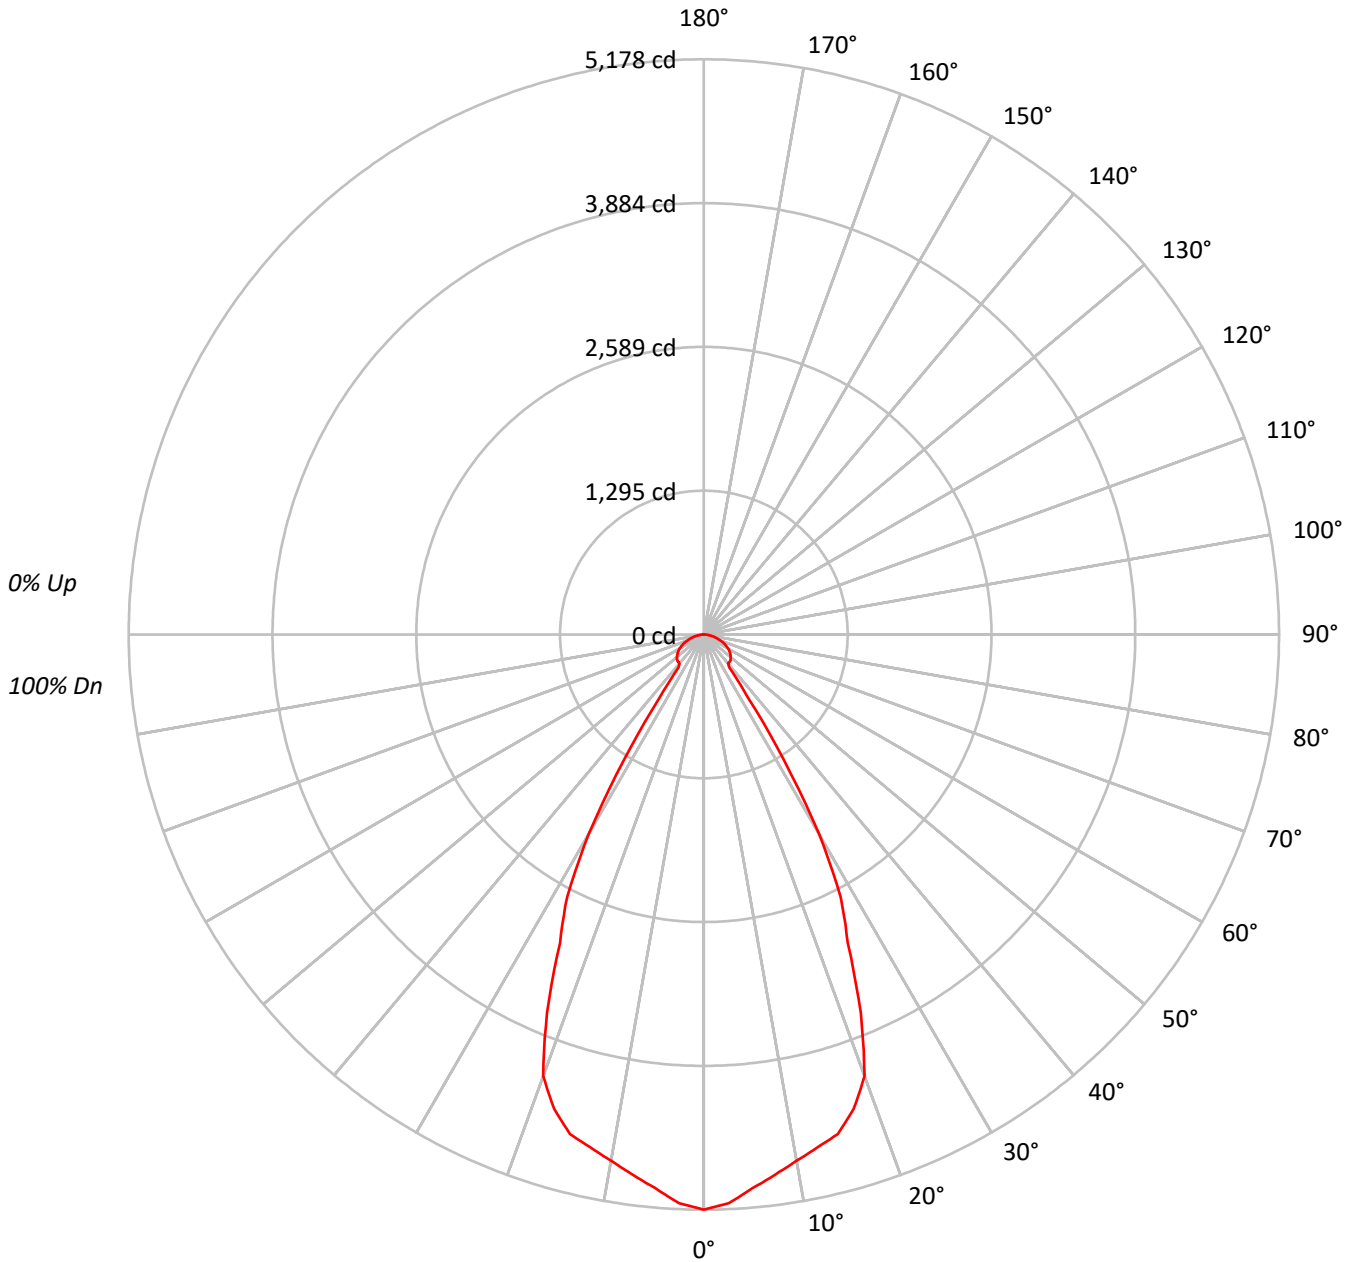



TEST NUMBER: P792681

CATALOG NUMBER: LER6D40BD010-EC6DR7040509027-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	565752
5°	548939
10°	533641
15°	526641
20°	491776
25°	369444
30°	261171
35°	92514
40°	48637
45°	51810
50°	53646
55°	54652
60°	55002
65°	53827
70°	50794
75°	47070
80°	41779
85°	33973

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 55007 cd/sqm



TEST NUMBER: P792681

CATALOG NUMBER: LER6D40BD010-EC6DR7040509027-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	472.1	10.3
10°-20°	1294.9	28.1
20°-30°	1426.2	31.0
30°-40°	544.9	11.8
40°-50°	257.3	5.6
50°-60°	255.8	5.6
60°-70°	204.8	4.4
70°-80°	117.7	2.6
80°-90°	32.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3193.1	69.3
0°-40°	3738.0	81.2
0°-60°	4251.1	92.3
0°-90°	4605.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4605.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5178	
5°	5005	472
15°	4656	1295
25°	3064	1426
35°	694	545
45°	335	257
55°	287	256
65°	208	205
75°	112	118
85°	27	32
90°	0	



TEST NUMBER: P792681

CATALOG NUMBER: LER6D40BD010-EC6DR7040509027-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	5178.0
2.5°	5123.9
5°	5005.0
7.5°	4905.8
10°	4809.9
12.5°	4728.8
15°	4655.8
17.5°	4479.5
20°	4229.5
22.5°	3690.0
25°	3064.5
27.5°	2667.7
30°	2070.1
32.5°	1337.1
35°	693.6
37.5°	374.7
40°	341.0
42.5°	338.6
45°	335.3
47.5°	327.9
50°	315.6
52.5°	301.7
55°	286.9
57.5°	270.5
60°	251.7
62.5°	230.4
65°	208.2
67.5°	183.6
70°	159.0
72.5°	134.5
75°	111.5
77.5°	87.7
80°	66.4
82.5°	46.7
85°	27.1
87.5°	10.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)