

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792692

Luminaire Tested: LER6D40BD010-EC6DR7040509030-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P792692
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D40BD010-EC6DR7040509030-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4756.7 lumens
Efficiency: N/A
Efficacy: 135.1 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792692

CATALOG NUMBER: LER6D40BD010-EC6DR7040509030-6LBS1H

Luminous Intensity Polar Plot

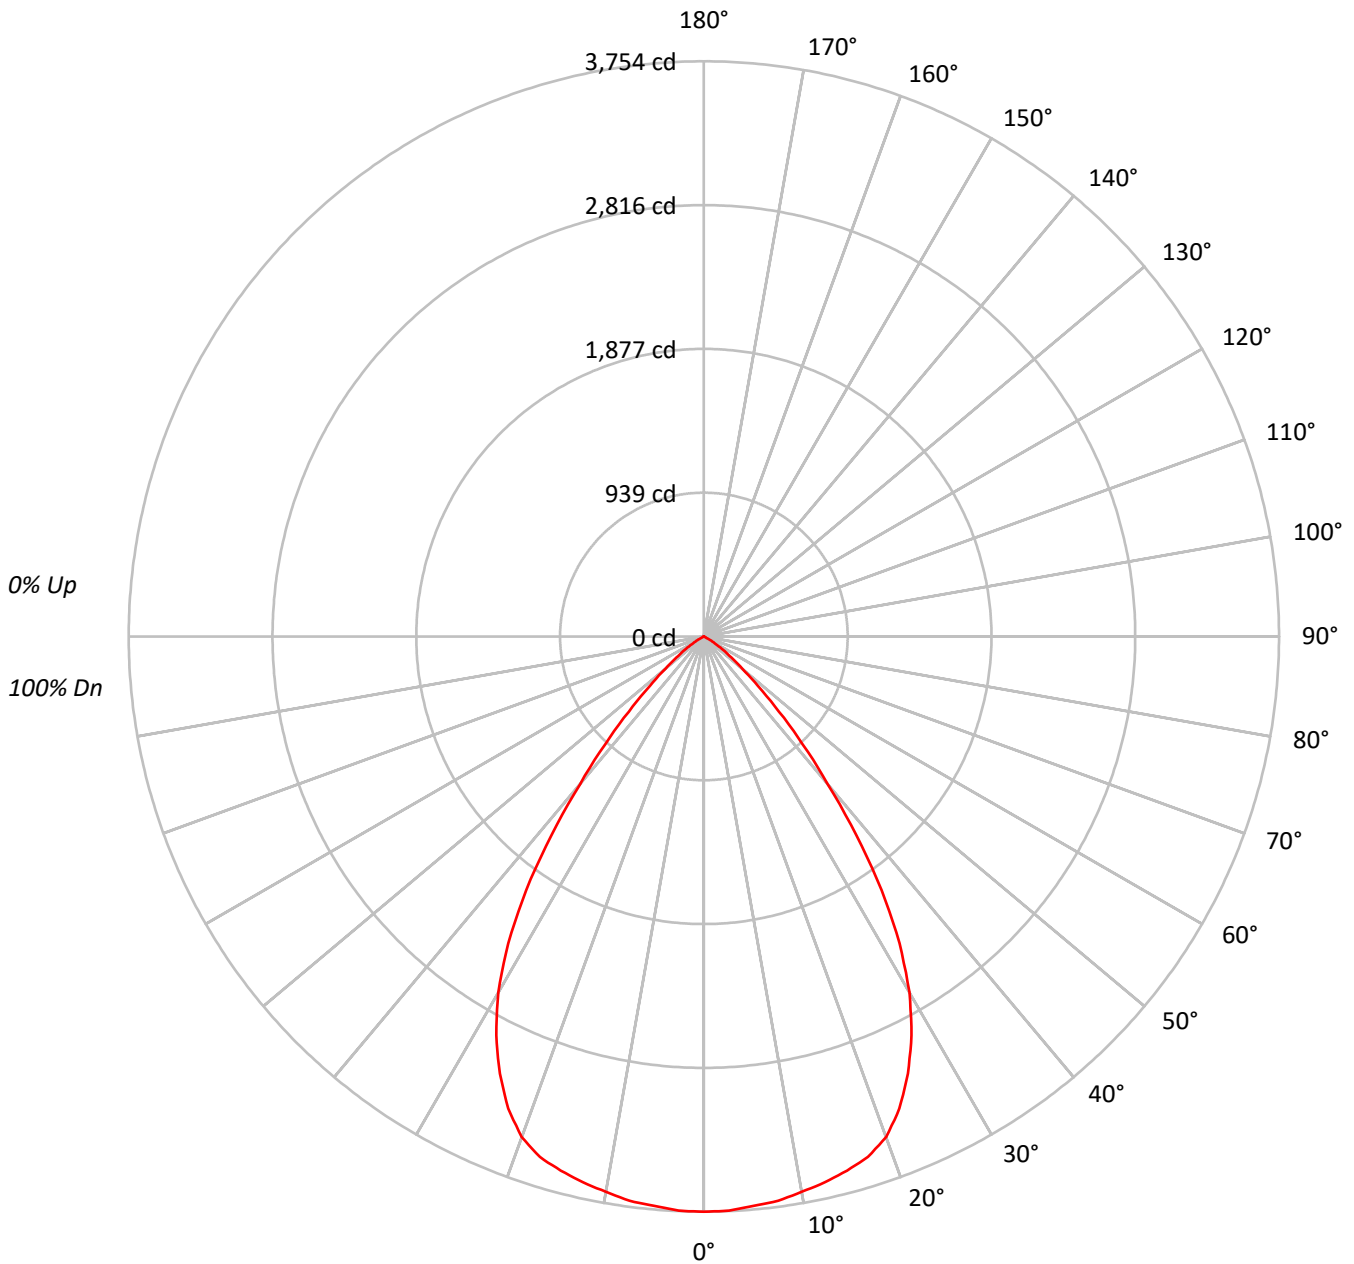



TEST NUMBER: P792692

CATALOG NUMBER: LER6D40BD010-EC6DR7040509030-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78			78
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71			71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65			65
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56			56
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51			51
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48			48
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44			44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	410209
5°	409176
10°	408293
15°	408176
20°	404188
25°	379691
30°	338497
35°	269887
40°	179200
45°	107143
50°	55549
55°	29202
60°	10336
65°	181
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 107143 cd/sqm



TEST NUMBER: P792692

CATALOG NUMBER: LER6D40BD010-EC6DR7040509030-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	354.8	7.5
10°-20°	1017.6	21.4
20°-30°	1435.5	30.2
30°-40°	1239.2	26.1
40°-50°	554.9	11.7
50°-60°	145.3	3.1
60°-70°	9.5	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2807.8	59.0
0°-40°	4047.0	85.1
0°-60°	4747.3	99.8
0°-90°	4756.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4756.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3754	
5°	3731	355
15°	3608	1018
25°	3150	1435
35°	2023	1239
45°	693	555
55°	153	145
65°	1	9
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P792692

CATALOG NUMBER: LER6D40BD010-EC6DR7040509030-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	3754.4
2.5°	3750.3
5°	3730.7
7.5°	3714.5
10°	3680.1
12.5°	3649.1
15°	3608.5
17.5°	3562.0
20°	3476.2
22.5°	3335.1
25°	3149.5
27.5°	2934.1
30°	2683.0
32.5°	2375.8
35°	2023.4
37.5°	1634.5
40°	1256.4
42.5°	954.6
45°	693.4
47.5°	478.0
50°	326.8
52.5°	225.5
55°	153.3
57.5°	92.5
60°	47.3
62.5°	14.9
65°	0.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)