

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P792809

Luminaire Tested: LER6D45BD010-EC6DR3040509050-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P792809
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D45BD010-EC6DR3040509050-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5356.6 lumens
Efficiency: N/A
Efficacy: 138.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P792809

CATALOG NUMBER: LER6D45BD010-EC6DR3040509050-6LBDP1LI

Luminous Intensity Polar Plot

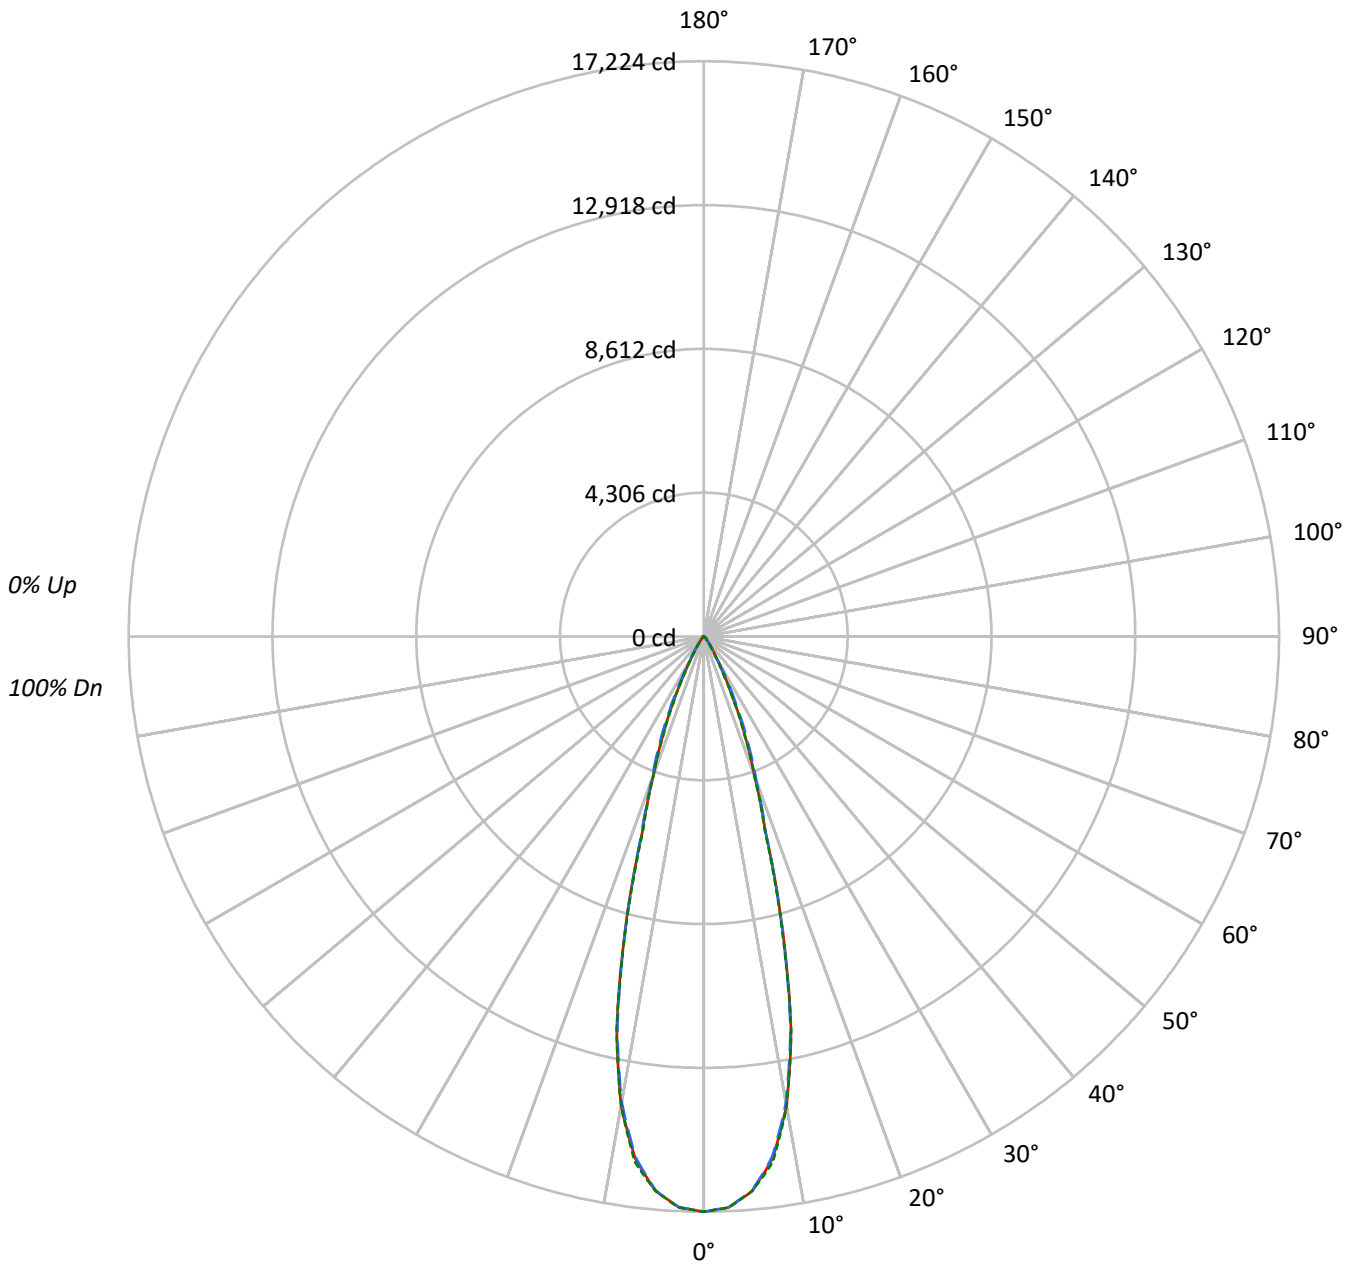



TEST NUMBER: P792809

CATALOG NUMBER: LER6D45BD010-EC6DR3040509050-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1318383	1318383	1318383
5°	1280537	1279039	1280599
10°	1109140	1101321	1108876
15°	723660	719769	716156
20°	359839	373344	359358
25°	181260	204401	177552
30°	72573	79078	63230
35°	33658	32238	27023
40°	14538	16137	13689
45°	10251	12719	10349
50°	3525	9264	3727
55°	2028	3843	2149
60°	1424	1684	1424
65°	924	924	924
70°	559	380	559
75°	0	237	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 12719 cd/sqm



TEST NUMBER: P792809

CATALOG NUMBER: LER6D45BD010-EC6DR3040509050-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1514.6	28.3
10°-20°	2439.3	45.5
20°-30°	1054.1	19.7
30°-40°	240.2	4.5
40°-50°	82.5	1.5
50°-60°	20.1	0.4
60°-70°	5.2	0.1
70°-80°	0.5	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5007.9	93.5
0°-40°	5248.2	98.0
0°-60°	5350.8	99.9
0°-90°	5356.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5356.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	17224	17224	17224	17224	17224	
5°	16666	16650	16646	16681	16667	1516
15°	9132	9022	9083	9053	9037	2445
25°	2146	2227	2420	2171	2102	1027
35°	360	368	345	342	289	244
45°	95	118	118	118	96	67
55°	15	16	29	17	16	15
65°	5	5	5	5	5	5
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P792809

CATALOG NUMBER: LER6D45BD010-EC6DR3040509050-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	17224.0	17224.0	17224.0	17224.0	17224.0
2.5°	17109.9	17098.0	17104.8	17113.2	17116.6
5°	16665.9	16649.8	16646.4	16681.1	16666.7
7.5°	15770.4	15747.5	15712.9	15791.5	15865.1
10°	14270.2	14244.8	14169.6	14206.8	14266.8
12.5°	12055.5	11973.4	11971.7	12090.1	12074.1
15°	9132.1	9022.1	9083.0	9053.4	9037.4
17.5°	6141.0	6098.8	6179.9	6155.4	6049.7
20°	4417.6	4428.6	4583.4	4505.6	4411.7
22.5°	3223.6	3263.3	3446.8	3246.4	3172.8
25°	2146.2	2227.4	2420.2	2170.8	2102.3
27.5°	1320.0	1357.3	1552.6	1303.1	1265.9
30°	821.1	802.5	894.7	767.8	715.4
32.5°	538.7	515.0	544.6	488.8	446.5
35°	360.2	367.9	345.0	342.5	289.2
37.5°	224.9	258.8	228.3	243.5	186.0
40°	145.5	187.7	161.5	178.4	137.0
42.5°	119.2	144.6	132.8	141.2	121.8
45°	94.7	117.5	117.5	117.5	95.6
47.5°	52.4	78.6	100.6	80.3	55.8
50°	29.6	39.7	77.8	41.4	31.3
52.5°	20.3	22.8	53.3	23.7	21.1
55°	15.2	16.1	28.8	16.9	16.1
57.5°	11.8	12.7	15.2	12.7	11.8
60°	9.3	9.3	11.0	10.1	9.3
62.5°	6.8	6.8	7.6	6.8	6.8
65°	5.1	5.1	5.1	5.1	5.1
67.5°	2.5	3.4	3.4	3.4	3.4
70°	2.5	1.7	1.7	1.7	2.5
72.5°	1.7	0.8	0.8	0.8	0.8
75°	0.0	0.0	0.8	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)