

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793040

Luminaire Tested: LER6D45BD010-EC6DR5540509040-6LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793040  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D45BD010-EC6DR5540509040-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 55° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5304.1 lumens  
Efficiency: N/A  
Efficacy: 137.1 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P793040

CATALOG NUMBER: LER6D45BD010-EC6DR5540509040-6LBDP1H

### Luminous Intensity Polar Plot

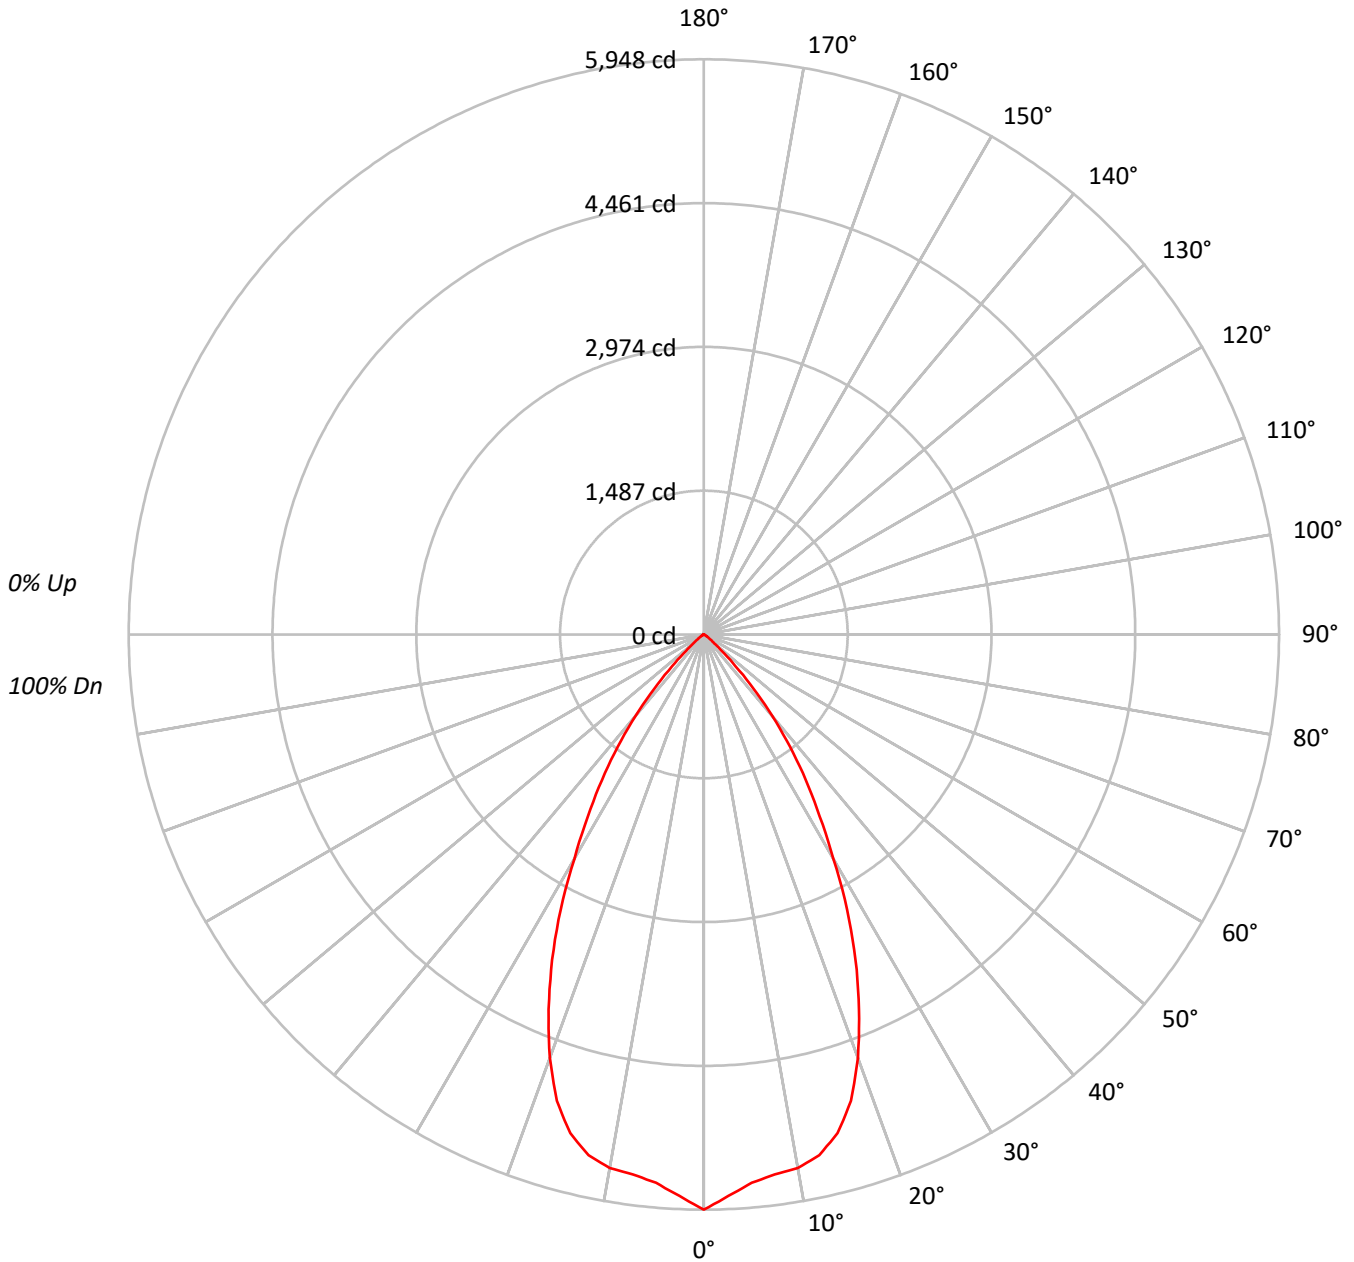



TEST NUMBER: P793040

CATALOG NUMBER: LER6D45BD010-EC6DR5540509040-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87																			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81																			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75																			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70																			
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65																			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61																			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57																			
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54																			
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	649850
5°	624047
10°	621687
15°	603831
20°	541425
25°	447455
30°	338005
35°	245077
40°	156836
45°	71635
50°	23423
55°	10115
60°	4349
65°	569
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 71635 cd/sqm



TEST NUMBER: P793040

CATALOG NUMBER: LER6D45BD010-EC6DR5540509040-6LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	541.4	10.2
10°-20°	1477.6	27.9
20°-30°	1683.9	31.7
30°-40°	1146.3	21.6
40°-50°	395.0	7.4
50°-60°	54.6	1.0
60°-70°	5.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3702.9	69.8
0°-40°	4849.2	91.4
0°-60°	5298.8	99.9
0°-90°	5304.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5304.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5948	
5°	5690	541
15°	5338	1478
25°	3712	1684
35°	1837	1146
45°	464	395
55°	53	55
65°	2	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P793040

CATALOG NUMBER: LER6D45BD010-EC6DR5540509040-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5947.7
2.5°	5811.4
5°	5689.8
7.5°	5630.1
10°	5603.5
12.5°	5515.1
15°	5338.2
17.5°	5057.4
20°	4656.5
22.5°	4193.6
25°	3711.6
27.5°	3209.7
30°	2679.1
32.5°	2229.5
35°	1837.4
37.5°	1464.4
40°	1099.6
42.5°	762.1
45°	463.6
47.5°	249.8
50°	137.8
52.5°	81.8
55°	53.1
57.5°	33.9
60°	19.9
62.5°	8.8
65°	2.2
67.5°	0.7
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)