

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793089

Luminaire Tested: LER6D45BD010-EC6DR6040509040-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793089  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D45BD010-EC6DR6040509040-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5461.8 lumens  
Efficiency: N/A  
Efficacy: 141.1 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P793089

CATALOG NUMBER: LER6D45BD010-EC6DR6040509040-6LBDP1LI

### Luminous Intensity Polar Plot

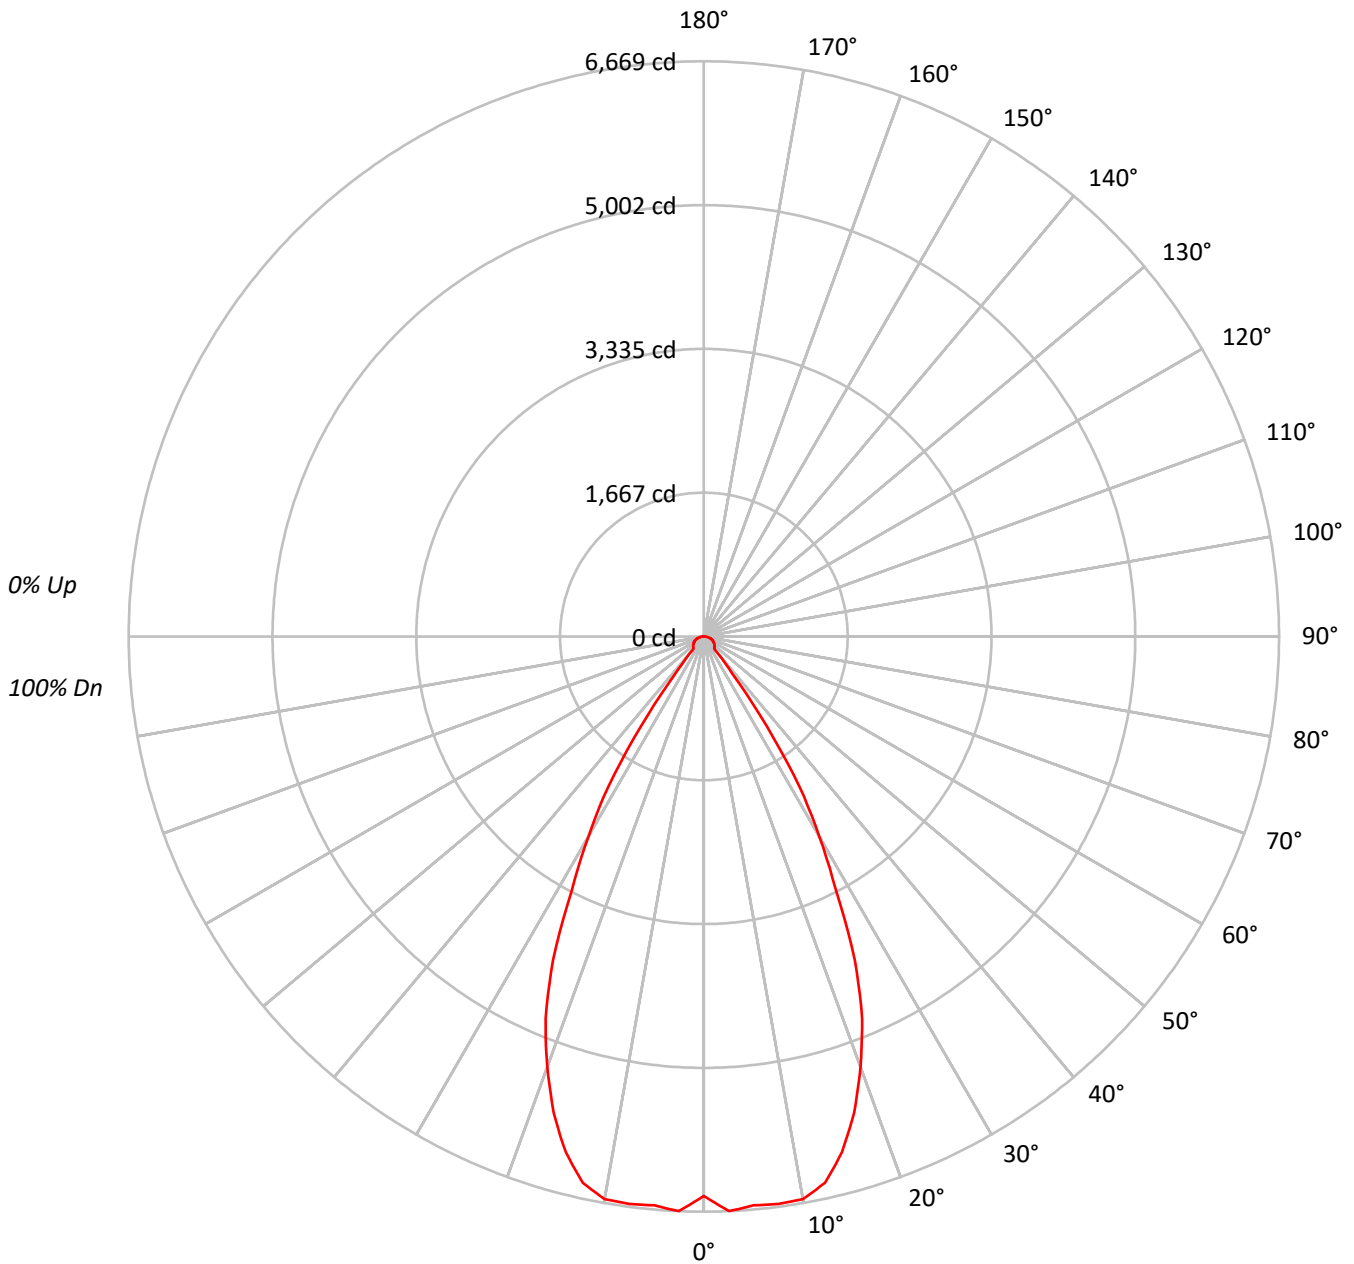



TEST NUMBER: P793089

CATALOG NUMBER: LER6D45BD010-EC6DR6040509040-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86		
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66		
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62		
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	708731
5°	726168
10°	734930
15°	700126
20°	617293
25°	499282
30°	337727
35°	169236
40°	27456
45°	26871
50°	27401
55°	27812
60°	28583
65°	29240
70°	29933
75°	30310
80°	29195
85°	24320

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 30310 cd/sqm



TEST NUMBER: P793089

CATALOG NUMBER: LER6D45BD010-EC6DR6040509040-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	632.8	11.6
10°-20°	1712.1	31.3
20°-30°	1842.0	33.7
30°-40°	800.7	14.7
40°-50°	134.5	2.5
50°-60°	130.7	2.4
60°-70°	111.8	2.0
70°-80°	74.8	1.4
80°-90°	22.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4186.9	76.7
0°-40°	4987.6	91.3
0°-60°	5252.8	96.2
0°-90°	5461.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5461.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6487	
5°	6621	633
15°	6190	1712
25°	4142	1842
35°	1269	801
45°	174	134
55°	146	131
65°	113	112
75°	72	75
85°	19	22
90°	0	



TEST NUMBER: P793089

CATALOG NUMBER: LER6D45BD010-EC6DR6040509040-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6486.6
2.5°	6669.0
5°	6620.9
7.5°	6636.1
10°	6624.2
12.5°	6487.5
15°	6189.5
17.5°	5789.4
20°	5309.0
22.5°	4794.9
25°	4141.5
27.5°	3312.5
30°	2676.9
32.5°	2063.2
35°	1268.8
37.5°	542.8
40°	192.5
42.5°	177.3
45°	173.9
47.5°	168.0
50°	161.2
52.5°	153.6
55°	146.0
57.5°	138.4
60°	130.8
62.5°	122.4
65°	113.1
67.5°	103.8
70°	93.7
72.5°	82.7
75°	71.8
77.5°	59.1
80°	46.4
82.5°	32.9
85°	19.4
87.5°	6.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)