

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793370

Luminaire Tested: LER6D50D010-EC6DR4040509035-6LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793370  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D50D010-EC6DR4040509035-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5764.0 lumens  
Efficiency: N/A  
Efficacy: 122.6 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 47  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P793370  
CATALOG NUMBER: LER6D50D010-EC6DR4040509035-6LBDP1MW

### Luminous Intensity Polar Plot

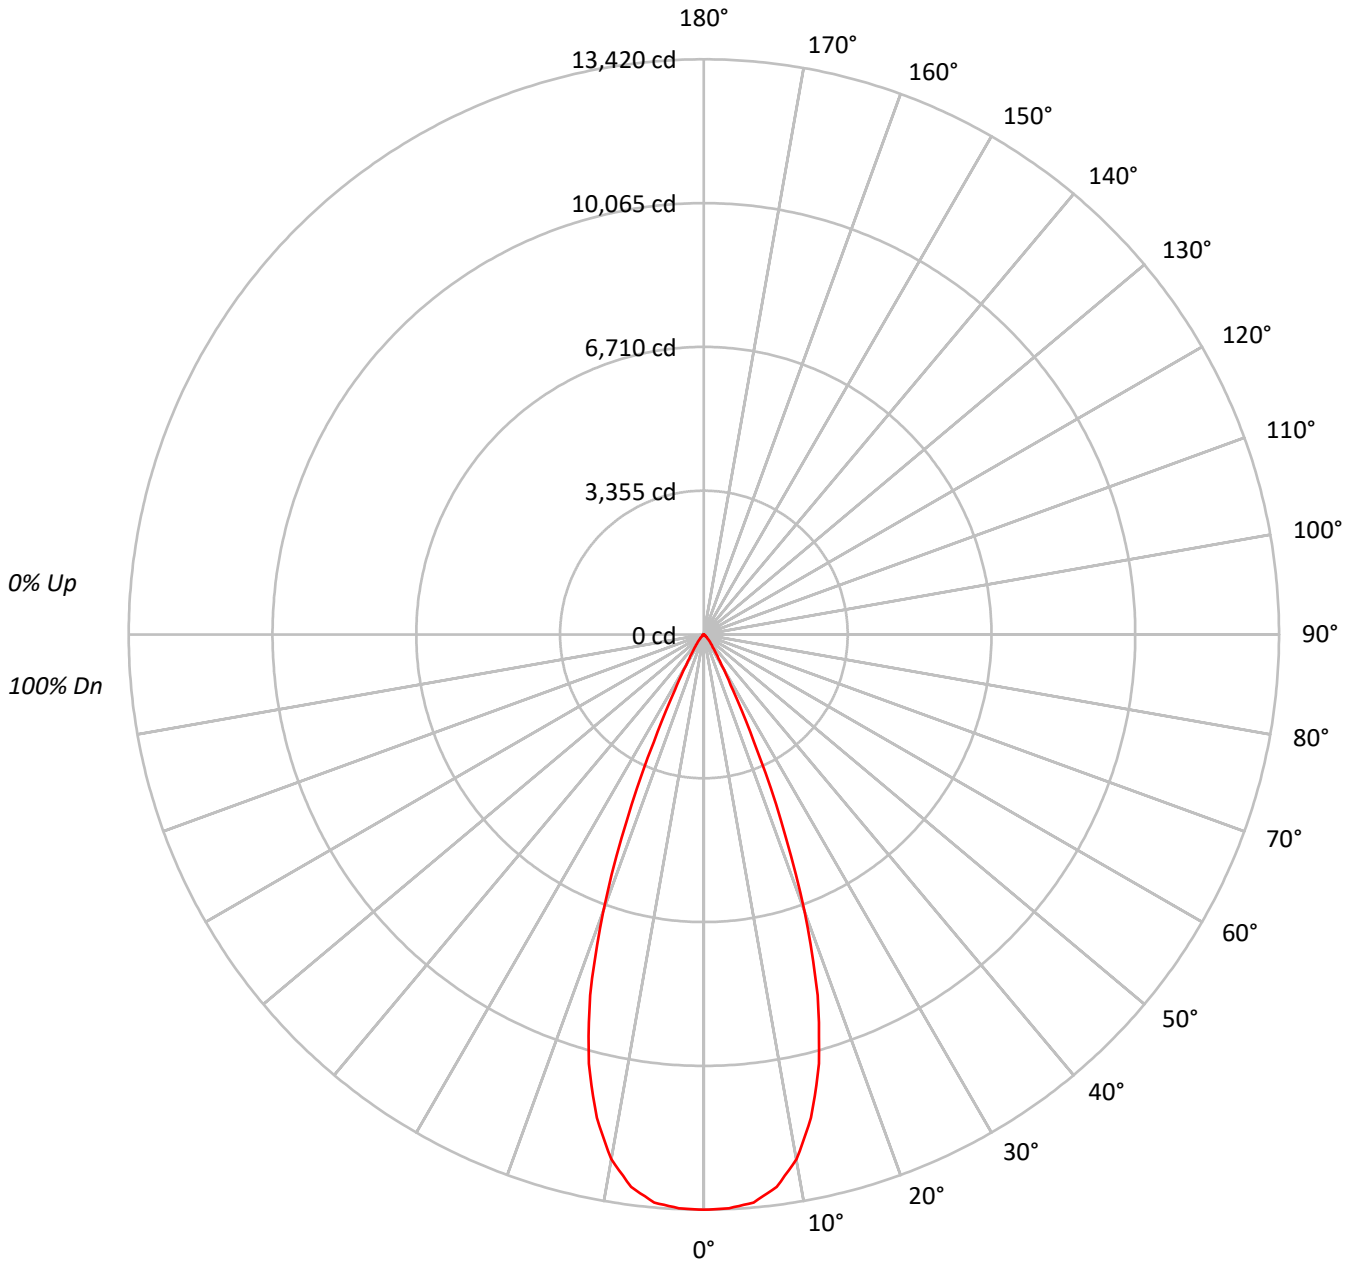



TEST NUMBER: P793370

CATALOG NUMBER: LER6D50D010-EC6DR4040509035-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96				96															
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92				92															
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88				88															
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84				84															
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81				81															
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77				77															
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74				74															
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72				72															
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69				69															
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67				67															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1466279
5°	1459158
10°	1379218
15°	1172517
20°	799155
25°	333446
30°	104842
35°	48725
40°	26943
45°	12361
50°	6000
55°	3276
60°	1704
65°	620
70°	256
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12361 cd/sqm



TEST NUMBER: P793370

CATALOG NUMBER: LER6D50D010-EC6DR4040509035-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1242.3	21.6
10°-20°	2783.0	48.3
20°-30°	1393.1	24.2
30°-40°	255.4	4.4
40°-50°	70.5	1.2
50°-60°	16.5	0.3
60°-70°	3.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5418.3	94.0
0°-40°	5673.7	98.4
0°-60°	5760.7	99.9
0°-90°	5764.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5764.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	13420	
5°	13304	###
15°	10366	2783
25°	2766	1393
35°	365	255
45°	80	70
55°	17	17
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P793370

CATALOG NUMBER: LER6D50D010-EC6DR4040509035-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	13420.0
2.5°	13400.4
5°	13304.0
7.5°	12996.7
10°	12431.4
12.5°	11550.3
15°	10365.7
17.5°	8825.2
20°	6873.1
22.5°	4685.8
25°	2765.9
27.5°	1462.1
30°	831.0
32.5°	537.0
35°	365.3
37.5°	261.1
40°	188.9
42.5°	129.4
45°	80.0
47.5°	51.0
50°	35.3
52.5°	25.1
55°	17.2
57.5°	11.0
60°	7.8
62.5°	4.7
65°	2.4
67.5°	1.6
70°	0.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)