

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793485

Luminaire Tested: LER6D50D010-EC6DR5040509050-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793485  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D50D010-EC6DR5040509050-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7034.4 lumens  
Efficiency: N/A  
Efficacy: 149.7 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 47  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P793485  
CATALOG NUMBER: LER6D50D010-EC6DR5040509050-6LBS1LI

### Luminous Intensity Polar Plot

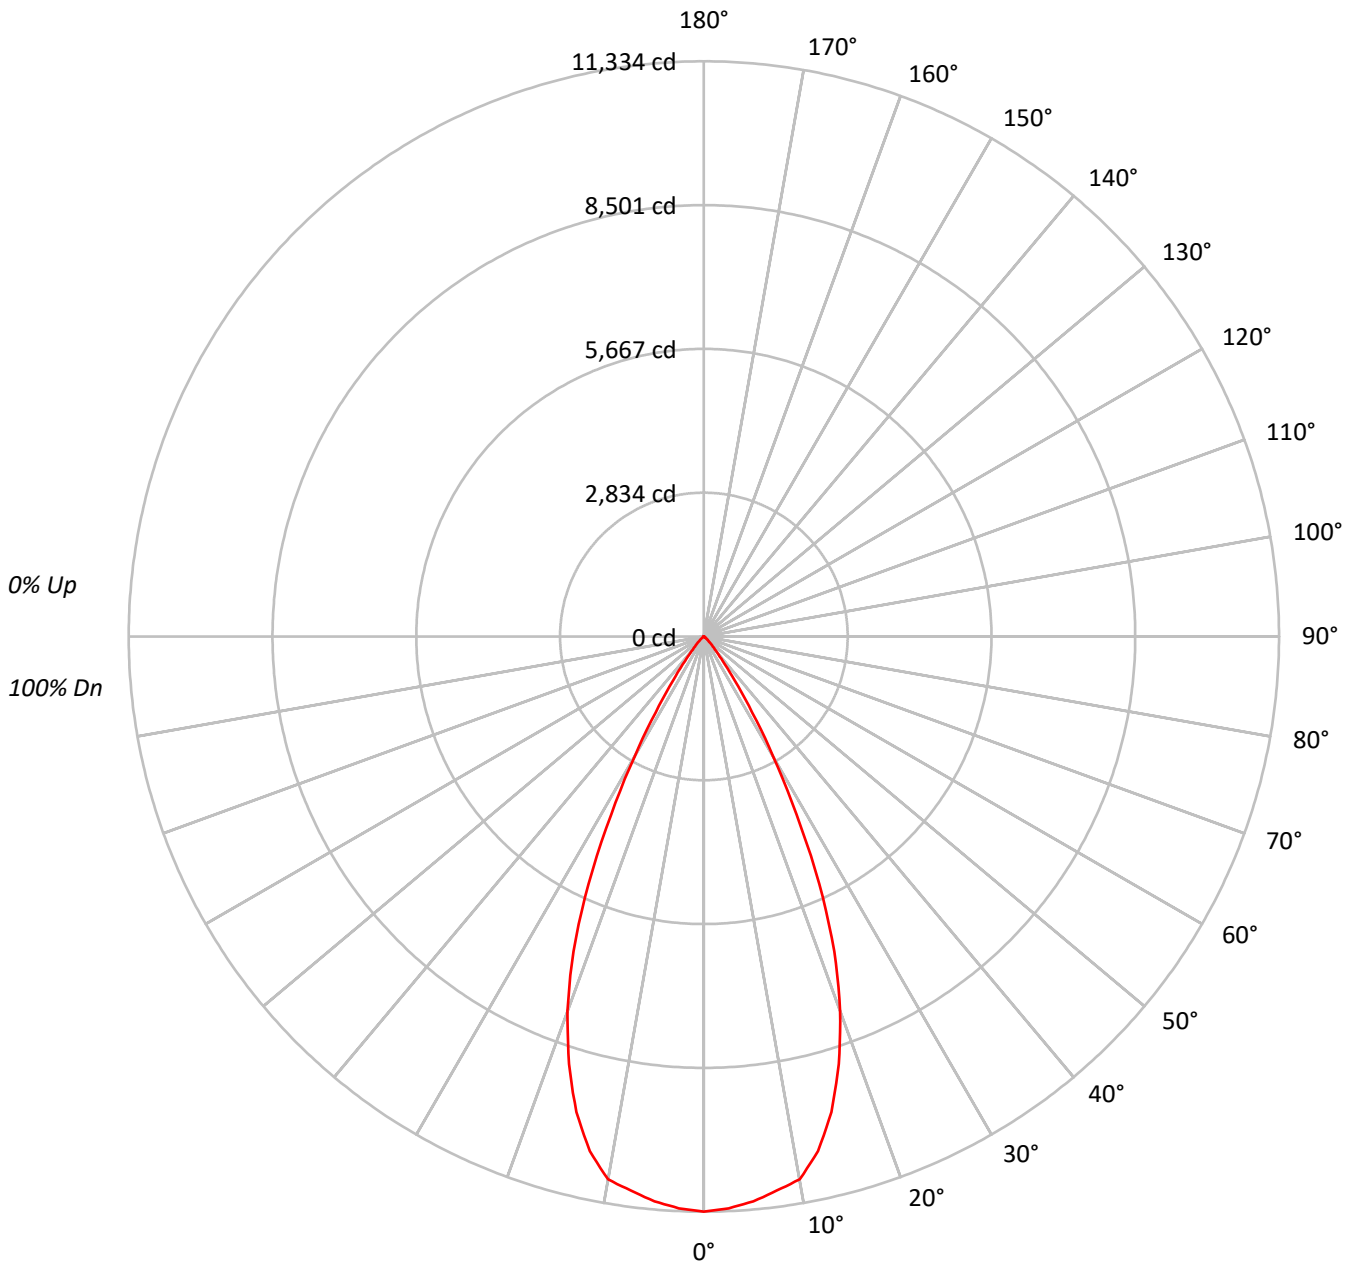



TEST NUMBER: P793485

CATALOG NUMBER: LER6D50D010-EC6DR5040509050-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95						95													
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90						90													
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85						85													
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80						80													
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76						76													
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72						72													
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69						69													
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65						65													
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62						62													
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59						59													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1238383
5°	1225401
10°	1205221
15°	1097442
20°	913195
25°	648241
30°	343114
35°	139825
40°	51932
45°	23765
50°	9740
55°	5105
60°	2513
65°	750
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23765 cd/sqm



TEST NUMBER: P793485

CATALOG NUMBER: LER6D50D010-EC6DR5040509050-6LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1056.0	15.0
10°-20°	2668.8	37.9
20°-30°	2397.3	34.1
30°-40°	750.6	10.7
40°-50°	131.4	1.9
50°-60°	26.2	0.4
60°-70°	4.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6122.2	87.0
0°-40°	6872.8	97.7
0°-60°	7030.4	99.9
0°-90°	7034.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7034.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	11334	
5°	11173	###
15°	9702	2669
25°	5377	2397
35°	1048	751
45°	154	131
55°	27	26
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P793485

CATALOG NUMBER: LER6D50D010-EC6DR5040509050-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	11334.2
2.5°	11277.8
5°	11172.7
7.5°	11012.1
10°	10863.1
12.5°	10385.3
15°	9702.0
17.5°	8834.4
20°	7853.9
22.5°	6719.7
25°	5377.1
27.5°	3953.2
30°	2719.6
32.5°	1770.7
35°	1048.3
37.5°	602.0
40°	364.1
42.5°	237.0
45°	153.8
47.5°	93.6
50°	57.3
52.5°	39.2
55°	26.8
57.5°	18.2
60°	11.5
62.5°	6.7
65°	2.9
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)