

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793596

Luminaire Tested: LER6D50D010-EC6DR6540509027-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P793596  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D50D010-EC6DR6540509027-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5156.1 lumens  
Efficiency: N/A  
Efficacy: 109.7 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 47  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P793596

CATALOG NUMBER: LER6D50D010-EC6DR6540509027-6LBS1H

### Luminous Intensity Polar Plot

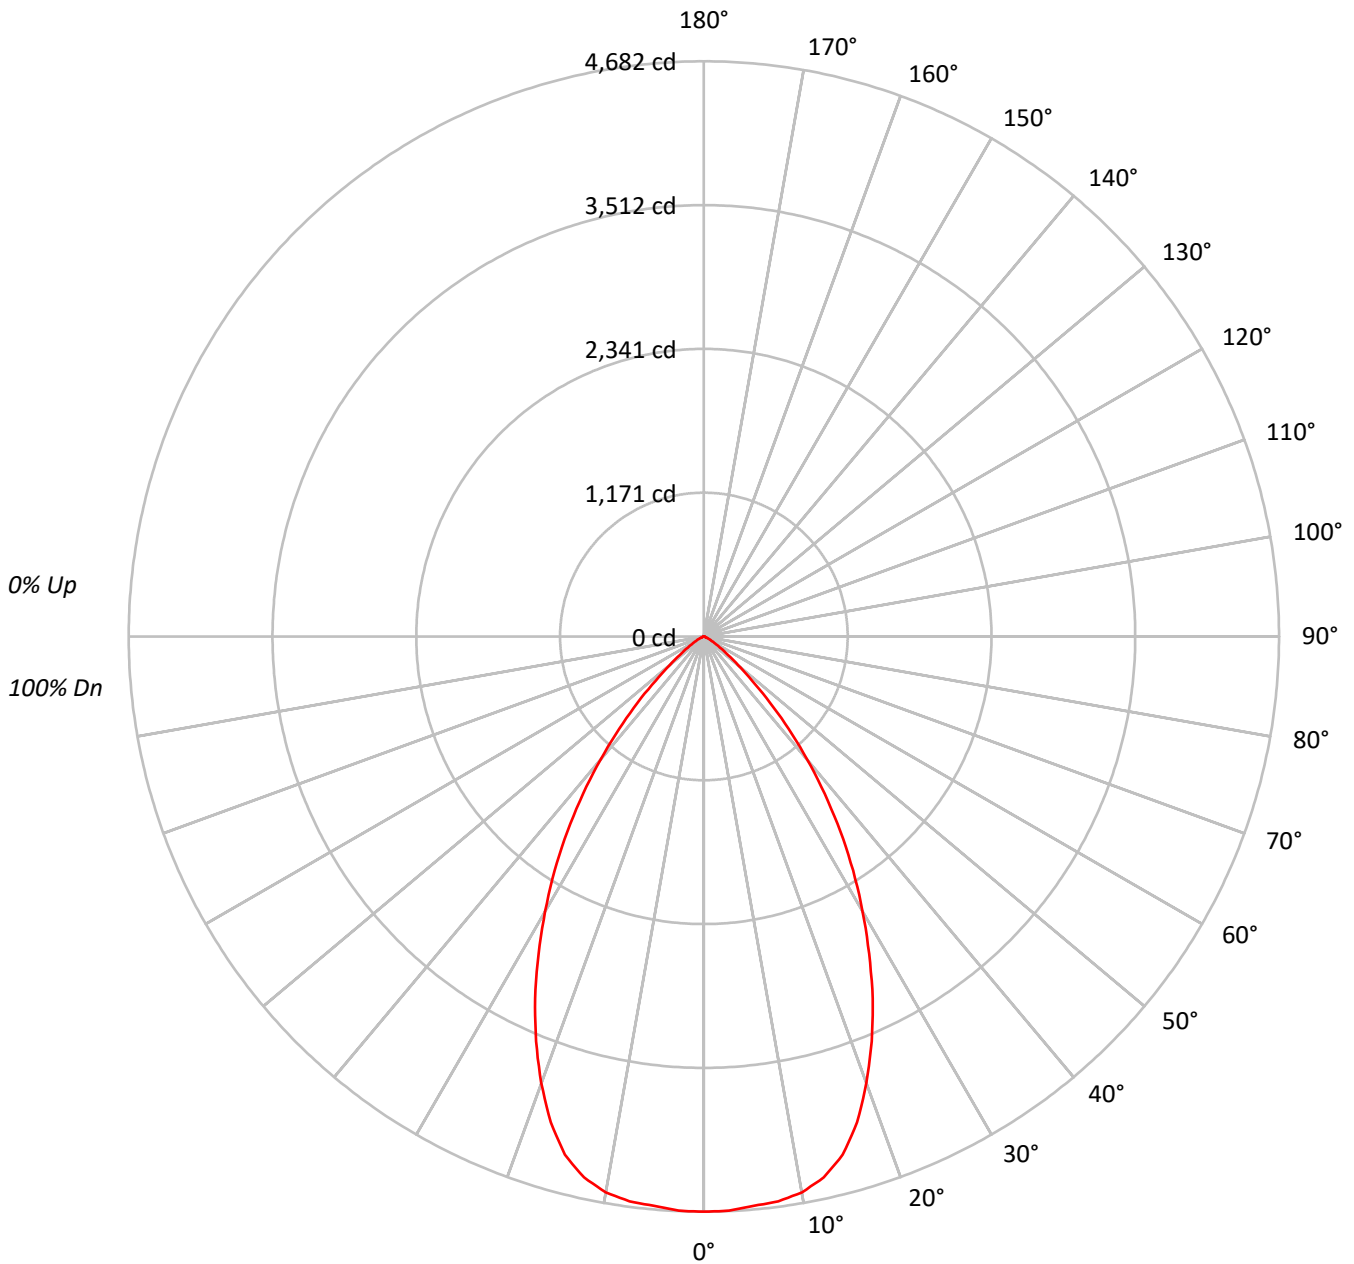



TEST NUMBER: P793596

CATALOG NUMBER: LER6D50D010-EC6DR6540509027-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	273424
5°	272733
10°	272500
15°	264101
20°	240429
25°	209519
30°	174262
35°	138076
40°	99654
45°	62963
50°	32819
55°	17442
60°	9158
65°	5044
70°	2117
75°	2324
80°	1614
85°	1407

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 62963 cd/sqm



TEST NUMBER: P793596

CATALOG NUMBER: LER6D50D010-EC6DR6540509027-6LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	442.7	8.6
10°-20°	1212.4	23.5
20°-30°	1481.9	28.7
30°-40°	1202.4	23.3
40°-50°	599.2	11.6
50°-60°	167.1	3.2
60°-70°	38.0	0.7
70°-80°	9.9	0.2
80°-90°	2.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3137.0	60.8
0°-40°	4339.4	84.2
0°-60°	5105.7	99.0
0°-90°	5156.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5156.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4682	
5°	4652	443
15°	4368	1212
25°	3251	1482
35°	1937	1202
45°	762	599
55°	171	167
65°	36	38
75°	10	10
85°	2	3
90°	0	



TEST NUMBER: P793596

CATALOG NUMBER: LER6D50D010-EC6DR6540509027-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4681.6
2.5°	4678.1
5°	4652.0
7.5°	4636.9
10°	4594.9
12.5°	4509.6
15°	4367.9
17.5°	4146.3
20°	3868.4
22.5°	3568.5
25°	3251.3
27.5°	2912.1
30°	2584.0
32.5°	2260.0
35°	1936.6
37.5°	1614.0
40°	1307.1
42.5°	1019.6
45°	762.3
47.5°	531.1
50°	361.2
52.5°	249.0
55°	171.3
57.5°	115.6
60°	78.4
62.5°	54.3
65°	36.5
67.5°	18.6
70°	12.4
72.5°	11.7
75°	10.3
77.5°	6.9
80°	4.8
82.5°	3.4
85°	2.1
87.5°	1.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)