

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P793732

Luminaire Tested: LER6D55D010-EC6DR3055659024-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P793732
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D55D010-EC6DR3055659024-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5735.1 lumens
Efficiency: N/A
Efficacy: 98.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P793732
CATALOG NUMBER: LER6D55D010-EC6DR3055659024-6LBS1H

Luminous Intensity Polar Plot

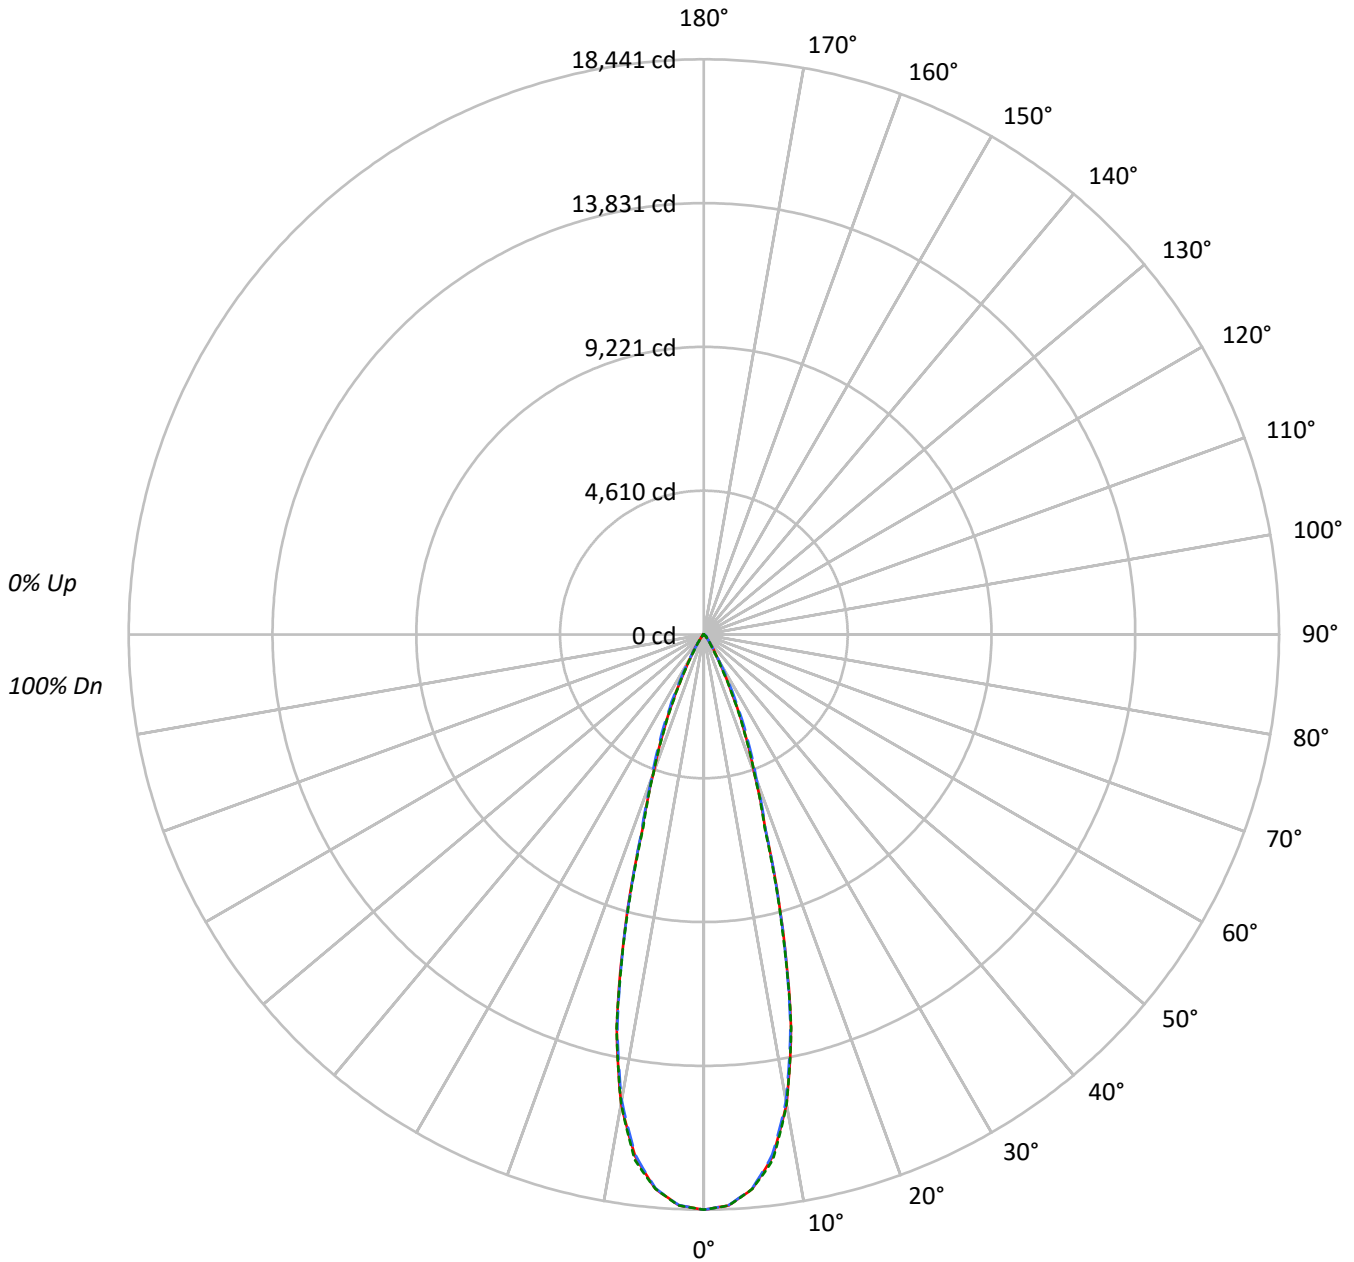



TEST NUMBER: P793732

CATALOG NUMBER: LER6D55D010-EC6DR3055659024-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1411552	1411552	1411552
5°	1371027	1369429	1371096
10°	1187517	1179146	1187237
15°	774796	770636	766761
20°	385270	399728	384756
25°	194072	218852	190094
30°	77699	84664	67703
35°	36041	34518	28930
40°	15558	17276	14658
45°	10976	13629	11074
50°	3775	9919	3989
55°	2175	4110	2295
60°	1531	1806	1531
65°	978	978	978
70°	604	403	604
75°	0	266	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 13629 cd/sqm



TEST NUMBER: P793732

CATALOG NUMBER: LER6D55D010-EC6DR3055659024-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1621.6	28.3
10°-20°	2611.6	45.5
20°-30°	1128.6	19.7
30°-40°	257.2	4.5
40°-50°	88.3	1.5
50°-60°	21.6	0.4
60°-70°	5.6	0.1
70°-80°	0.6	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5361.8	93.5
0°-40°	5619.0	98.0
0°-60°	5728.9	99.9
0°-90°	5735.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5735.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	18441	18441	18441	18441	18441	
5°	17844	17826	17823	17860	17844	1623
15°	9777	9660	9725	9693	9676	2618
25°	2298	2385	2591	2324	2251	1100
35°	386	394	369	367	310	262
45°	101	126	126	126	102	72
55°	16	17	31	18	17	16
65°	5	5	5	5	5	5
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P793732

CATALOG NUMBER: LER6D55D010-EC6DR3055659024-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	18441.2	18441.2	18441.2	18441.2	18441.2
2.5°	18318.9	18306.3	18313.5	18322.6	18326.2
5°	17843.6	17826.4	17822.8	17859.9	17844.5
7.5°	16884.8	16860.3	16823.2	16907.4	16986.2
10°	15278.6	15251.4	15170.9	15210.7	15275.0
12.5°	12907.4	12819.5	12817.7	12944.5	12927.3
15°	9777.4	9659.7	9724.9	9693.2	9676.0
17.5°	6575.0	6529.7	6616.7	6590.4	6477.2
20°	4729.8	4741.6	4907.3	4824.0	4723.5
22.5°	3451.4	3493.9	3690.4	3475.8	3397.1
25°	2297.9	2384.8	2591.3	2324.2	2250.8
27.5°	1413.3	1453.2	1662.3	1395.2	1355.4
30°	879.1	859.2	957.9	822.1	766.0
32.5°	576.7	551.4	583.1	523.3	478.1
35°	385.7	393.8	369.4	366.7	309.6
37.5°	240.8	277.1	244.5	260.8	199.2
40°	155.7	201.0	172.9	191.0	146.7
42.5°	127.7	154.8	142.1	151.2	130.4
45°	101.4	125.9	125.9	125.9	102.3
47.5°	56.1	84.2	107.7	86.0	59.8
50°	31.7	42.6	83.3	44.4	33.5
52.5°	21.7	24.4	57.0	25.4	22.6
55°	16.3	17.2	30.8	18.1	17.2
57.5°	12.7	13.6	16.3	13.6	12.7
60°	10.0	10.0	11.8	10.9	10.0
62.5°	7.2	7.2	8.1	7.2	7.2
65°	5.4	5.4	5.4	5.4	5.4
67.5°	2.7	3.6	3.6	3.6	3.6
70°	2.7	1.8	1.8	1.8	2.7
72.5°	1.8	0.9	0.9	0.9	0.9
75°	0.0	0.0	0.9	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)